

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

2015

© COPYRIGHT 1999

BY TE CONNECTIVITY


ALL RIGHTS RESERVED.

LOC

DIST


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
NC		NEW RELEASE PER E.O. P15416	05SEP1997	SB	RDR
A		REVISED PER E.O. P15904	12FEB1999	RO	RDR
B		REVISED PER E.O. P17090	22JAN2001	AR	RDR
C		REVISED PER ECO-14-019072	23FEB2015	JA	DM

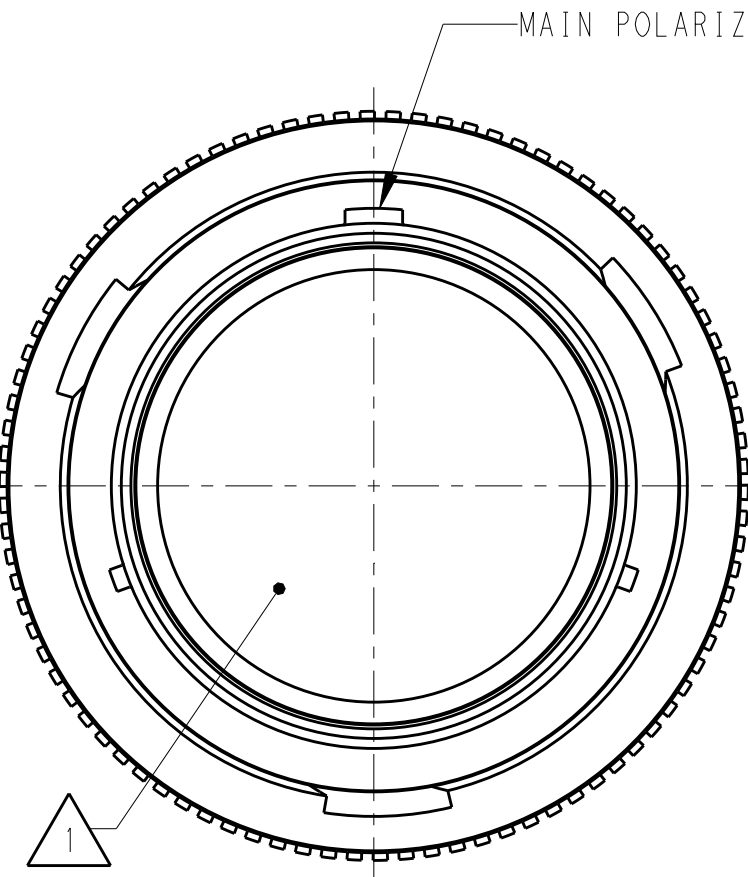

MAIN POLARIZING KEY



Ø 1.950
[49.53]
OVER KNURL

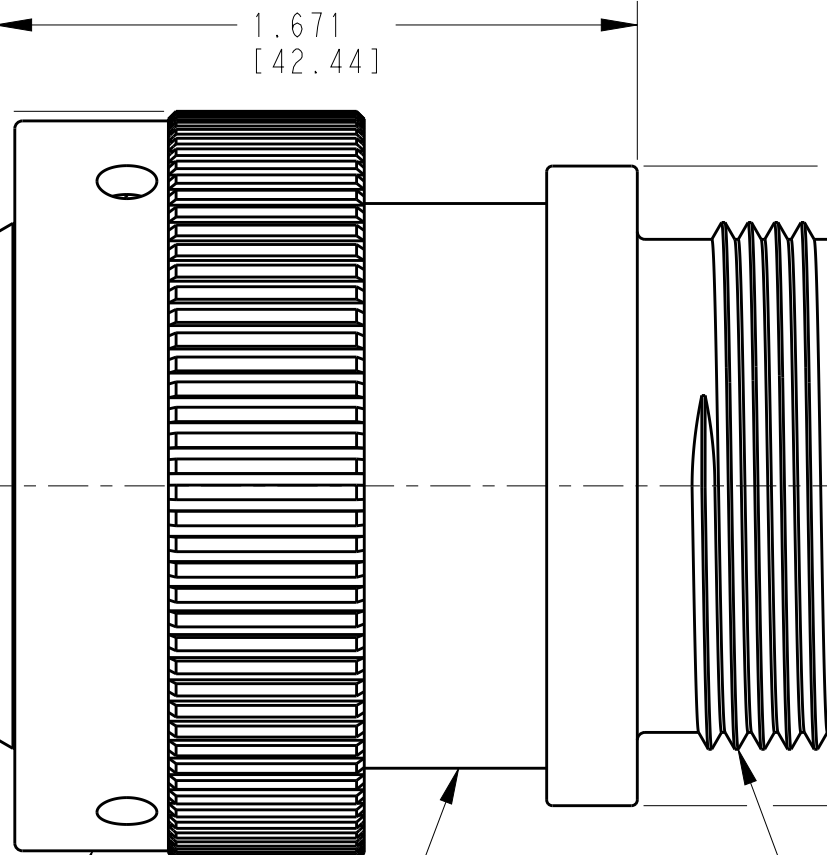

COUPLING RING

PLUG HOUSING

THREADED ADAPTER
(M35 X 1.75)

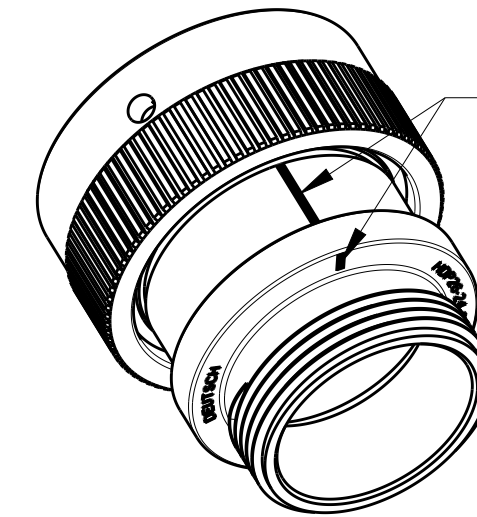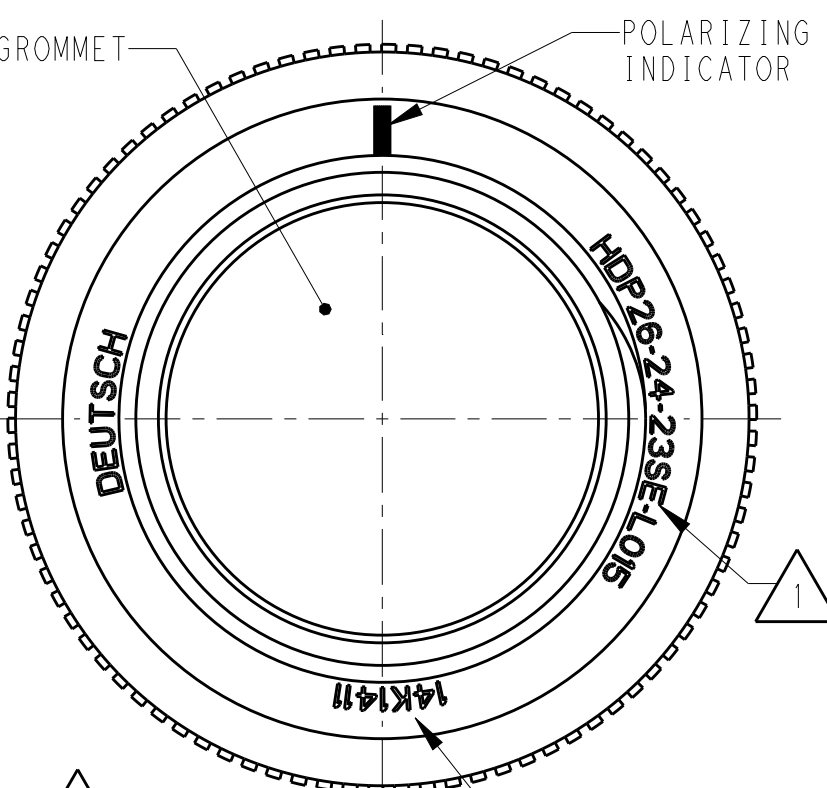

SCALE 1:1

6. PART MODIFICATION: THREADED ADAPTER

5 CONDUIT ADAPTER ACCEPTS EITHER TYPES:
A. CONDUIT ADAPTER CAP NUT (CN21) AND SEAL RING (SRN21)
B. BACKSHELL (M902-2243), COMPRESSION NUT (M902-2053), CABLE Ø.430-.570 [10.92-14.78]
C. BACKSHELL (M902-2244), COMPRESSION NUT (M902-2054), CABLE Ø.570-710 [14.78-18.03]

4 MATERIAL: PLUG HOUSING/COUPLING RING: PA66 GF10 (BLACK)
CONDUIT ADAPTER: PA66 GF10 (GREEN, GRAY, BLUE)
GROMMET: SILICONE (ORANGE-RED)

3 SEE 0425-021-0000 APPLICATION SPECIFICATION
A. RECOMMENDED WIRE INSULATION RANGE
B. CONTACT REMOVAL TOOLS


2. THIS PLUG MATES WITH HDP24-24XXP/SX-XXXX RECEPTACLE
X = SEAL TYPE (N,T,E)
XX = INSERT ARRANGEMENT
XXXX = MODIFICATION

1 SEE CUSTOMER DRAWING 0425-014-2400 FOR AVAILABLE INSERT ARRANGEMENTS AND PART NUMBERS.

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES[mm]



MATERIAL

4

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.015 [0.38]
4 PLC ±
ANGLES ±0°30'0"

FINISH

N/A

DWN 19JAN1999

STEVE BEARD

CHK 15JAN2001

STEVE BEARD

APVD 15JAN2001

STEVE BEARD

PRODUCT SPEC

0425-021-0000

APPLICATION SPEC

3

WEIGHT

Customer Drawing

TE

TE Connectivity

NAME
PLUG, COUPLING RING
SIZE 24, -L015 MOD
HDP SERIES

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 4AFU8 C-HDP26-24-XXP/SX-L015 -

SCALE 2:1 SHEET 1 OF 1 REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HDP26-24-16PE-L015](#)