


## Single Pole, Electrically Held, 1 Amp and Less


### 1MA, 1MAD, 1MADD

**1MA**  
Standard TO-5  
High Performance Relay  
Qualified to  
MIL-R-39016/7




Terminal View

**1MAD**  
Standard TO-5  
Diode Suppressed  
High Performance Relay  
Qualified to  
MIL-R-39016/23



Terminal View

**1MADD**  
Standard TO-5 Diode  
Suppressed/Protected  
High Performance Relay  
Qualified to  
MIL-R-39016/24



Terminal View

#### Product Facts

- Hermetically sealed
- High shock & vibration ratings
- Spreader pad
- Excellent RF switching

#### Product Facts

- Suppression diode
- Hermetically sealed
- High shock & vibration ratings
- Spreader pad
- Excellent RF switching

#### Product Facts

- Suppression & protection diodes
- Hermetically sealed
- High shock & vibration ratings
- Spreader pad
- Excellent RF switching

#### Electrical Characteristics

**Contact Arrangement** —  
1 Form C (SPDT)

**Contact Material** —  
Stationary —  
Gold/platinum/palladium/silver alloy  
(gold plated)  
Moveable —  
Gold/platinum/palladium/silver alloy  
(gold plated)

**Contact Resistance** —  
Before Life — 100 milliohms max.  
(measured @ 10 mA @ 6 Vdc)  
After Life — 200 milliohms max.  
(measured @ 1 A @ 28 Vdc)

**Mechanical Life Expectancy** —  
1 million operations

**Coil Voltage** — 5 to 26.5 Vdc

**Coil Power** — 512 mW max. @ 25°C


**Duty Cycle** — Continuous

**Pick-up Voltage** — Approximately  
50% of nominal coil voltage


**Pick-up Sensitivity** —  
100 mW max. @ 25°C

#### Contact Ratings

| Contact Load                     | Type                          | Operations MINd. |
|----------------------------------|-------------------------------|------------------|
| 1.0 A @ 28 Vdc                   | Resistive                     | 100,000          |
| 250 mA @ 115 Vac, 60 Hz & 400 Hz | Resistive (case not grounded) | 100,000          |
| 100 mA @ 115 Vac, 60 Hz & 400 Hz | Resistive                     | 100,000          |
| 0.2 A @ 28 Vdc                   | Inductive (0.32 Henry)        | 100,000          |
| 0.1 A @ 28 Vdc                   | Lamp                          | 100,000          |
| 30 $\mu$ A @ 50 mVdc             | Low Level                     | 1,000,000        |
| 0.1 A @ 28 Vdc                   | Intermediate Current          | 50,000           |

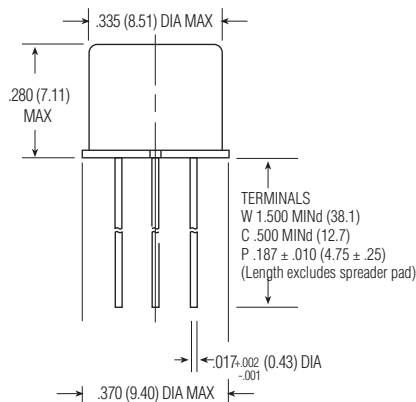

1MA/1MAD/1MADD Enclosure

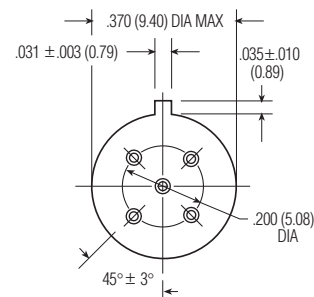

1MA/1MAD/1MADD Header

## Single Pole, Electrically Held, 1 Amp and Less (Continued)

### 1MA, 1MAD, 1MADD

(Continued)

#### Operating Characteristics

##### Timing —

Operate Time — 2.0 ms max.

Release Time —

1MA — 2.0 ms max.

1MAD/1MADD — 4.0 ms max.

(suppression diode, suppression/steering diodes)

**Contact Bounce** — 1.5 ms max

##### **Dielectric Withstanding Voltage** —

Between Open Contacts —

500 Vrms 60 Hz

Between Adjacent Contacts —

500 Vrms 60 Hz

Between Contacts &amp; Coil —

500 Vrms 60 Hz

##### **Insulation Resistance** —

10,000 megohms @ 500 Vdc

1,000 megohms @ 500 Vdc

(coil to case @ +125°C)

#### Environmental Characteristics

##### **Temperature Range** —

-65°C to +125°C

##### **Weight** —

0.08 oz. (2.27 grms)

0.09 oz. (2.52 grms) with spreader pad attached

##### **Vibration Resistance** —

30 G's, 10 to 3,000 Hz

##### **Shock Resistance** —

75 G's, 6 ±1 ms max.

##### **QPL Approval** —

MIL-R-39016/7 (J1MA)

MIL-R-39016/23 (J1MAD)


MIL-R-39016/24 (J1MADD)

#### Semiconductor Characteristics

##### **Diode** —

100 Vdc peak inverse voltage (PIV)

1.0 Vdc max. transient voltage

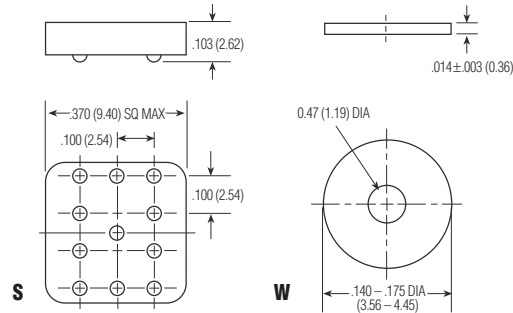

Spreader & Mounting Pads

### Coil Data

| Nom. Coil Voltage (Vdc) | Coil Resistance in Ohms ±10% @ 25°C (Note 1) | Coil Circuit Current mA (Max.) (Note 1 & 2) | Coil Circuit Current mA (Min.) (Note 1 & 2) | Pickup Voltage Vdc (Max.) @ 25°C (Note 2) | Base Turn On Current mA (Max.) @ 25°C | Pickup Voltage Vdc (Max.) @ 125°C (Note 2) | Base Turn On Current mA (Max.) @ 125°C | Drop-Out Voltage Vdc (Min.) @ 25°C (Note 2) | Drop-Out Voltage Vdc (Min.) @ -65°C (Note 2) | Nom. Coil Power (mW) @ 25°C | Max. Coil Voltage | Coil Desig. |
|-------------------------|--|---|---|---|---------------------------------------|--|--|---|--|-----------------------------|-------------------|-------------|
| <b>1MA/1MAD</b>         |  |   |   |   |                                       |  |  |   |  |                             |                   |             |
| 5.0                     | 63   | n/a   | n/a   | 2.8                                       | n/a                                   | 3.7  | n/a                                    | 0.23  | 0.15   | 397                         | 6.0               | 5           |
| 6.0                     | 125  | n/a   | n/a   | 3.5                                       | n/a                                   | 4.5  | n/a                                    | 0.28  | 0.18   | 288                         | 8.0               | 6           |
| 9.0                     | 280  | n/a   | n/a   | 5.3                                       | n/a                                   | 6.8  | n/a                                    | 0.54  | 0.35   | 289                         | 12.0              | 9           |
| 12.0                    | 500  | n/a   | n/a   | 7.0                                       | n/a                                   | 9.0  | n/a                                    | 0.63  | 0.40   | 288                         | 16.0              | 12          |
| 18.0                    | 1,130  | n/a   | n/a   | 10.5                                      | n/a                                   | 13.5                                       | n/a                                    | 0.91  | 0.58   | 287                         | 24.0              | 18          |
| 26.5                    | 2,000  | n/a   | n/a   | 14.2                                      | n/a                                   | 18.0                                       | n/a                                    | 1.37  | 0.89   | 351                         | 32.0              | 26          |
| <b>1MADD</b>            |  |   |   |   |                                       |  |  |   |  |                             |                   |             |
| 5.0                     | 50   | 100.0                                       | 72.7  | 3.5                                       | n/a                                   | 4.5  | n/a                                    | 0.23  | 0.15   | 500                         | 6.0               | 5           |
| 6.0                     | 98   | 62.4  | 46.3  | 4.1                                       | n/a                                   | 5.5  | n/a                                    | 0.28  | 0.18   | 367                         | 8.0               | 6           |
| 9.0                     | 280  | 33.7  | 25.9  | 6.3                                       | n/a                                   | 7.8  | n/a                                    | 0.54  | 0.35   | 289                         | 12.0              | 9           |
| 12.0                    | 500  | 25.6  | 20.0  | 8.0                                       | n/a                                   | 10.0                                       | n/a                                    | 0.63  | 0.40   | 288                         | 16.0              | 12          |
| 18.0                    | 1,130  | 17.2  | 13.6  | 11.6                                      | n/a                                   | 14.5                                       | n/a                                    | 0.91  | 0.58   | 287                         | 24.0              | 18          |
| 26.5                    | 2,000  | 14.4  | 11.5  | 15.4                                      | n/a                                   | 19.0                                       | n/a                                    | 1.37  | 0.89   | 351                         | 32.0              | 26          |

**Notes:** 1. Coil resistance not directly measurable. Coil current should be within limits shown when tested at nominal voltage at 25°C for 5 seconds max.

2. Set base current at 3 mA to 15 mA during measurements.

### Ordering Instructions

Catalog-selected Relays: The catalog number is derived by choosing the proper CODE for each of the relay characteristics in the order in which the codes are listed.

#### Specifying a Part Number Example\*:

**Type**
**Terminal**
**Diodes**
**Coils**
**Spreader/Mounting Pads**

1MA

C

D

-26

S

\* The part number example shown on this page is for catalog items. For a list of specific QPL part numbers, please see the index in Section 15.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[J1MAP-12XP](#)