

## KHA Series Panel Plug-in Relay

- Compact package
- Two and four pole form C contact arrangements
- Polycarbonate or nylon dust cover
- Various mounting configurations
- Indicator lamp and push-to-reset options available
- Various contact materials available for specific load requirements



Typical applications  
 Industrial sewing/stitching machines, fitness, elevators, pumps, robotics,  
 solar panels



## Approvals

UL E22575; CSA LR15734  
 Technical data of approved types on request

## Contact Data

Contact arrangement	2 form C (2CO), 4 form C (4CO)
Rated voltage	240VAC
Rated current	1-5A
Contact material	Ag, AgCdO, Au-AgNi, Au overlay Ag, Au diffused Ag
Contact style	Single contact or bifurcated crossbar
Min. recommended contact load	
Ag (single contact)	100mA, 12VDC
AgCdO (single contact)	300mA, 12VDC
Au-AgNi (single contact)	10mA, 12VDC
Au overlay Ag (bifurcated crossbar)	Dry circuit
Au diffused Ag (single contact)	50mA, 12VDC
Initial contact resistance	
Ag, AdCdO	100mΩ
Au-AgNi, Au overlay Ag, Au diffused Ag	200mΩ
Frequency of operation	360 ops./hour
Operate/release time max.	13/6ms

## Contact ratings

Type	Load	Cycles
<b>UL 508</b>		
Ag	5A, 120VAC, general purpose 2.5A, 240VAC, general purpose 1/10HP, 120/240VAC 180VA, 250VAC, pilot duty 42VA, 28VDC, pilot duty	
AgCdO	5A, 240VAC, general purpose 5A, 28VDC, resistive 1/10HP, 120/240VAC 180VA, 250VAC, pilot duty 42VA, 28VDC, pilot duty	
Au-AgNi	2A, 120VAC, resistive	
Au overlay Ag	1A, 120VAC 1A, 30VDC	
Au diffused Ag	5A, 120VAC, general purpose 2.5A, 240VAC, general purpose 1/10HP, 120/240VAC 180VA, 250VAC, pilot duty 42VA, 28VDC, pilot duty	

Note: The relay should only carry  $\leq 15A$  continuously (all poles combined).  
 Mechanical endurance  $10 \times 10^6$  ops.

## Coil Data

Coil voltage range	5 to 240VDC 6 to 240VAC
Coil insulation system according UL	Class B

## Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
5	5	3.75		32	800
6	6	4.5		40	900
12	12	9.0		160	900
24	24	18.0		650	850
48	48	36.0		2600	900
110	110	82.5		11000	1100
		220/240		Use 110V relay with series dropping 5W resistor of 11kΩ	

All figures are given for coil without preenergization, at ambient temperature +23°C.

## Coil versions, AC coil

Coil code	Rated voltage VAC	Operate voltage VAC	Coil resistance $\Omega \pm 15\%$	Rated coil power VA
6	6	5.1	10.5	1.2
12	12	10.2	43	1.2
24	24	20.4	160	1.25
48	48	40.8	668	1.2
120	120	102.0	3900	1.35
240	240	204.0	12000	1.5

All figures are given for coil without preenergization, at ambient temperature +23°C.

## Insulation Data

Initial dielectric strength between open contacts	1000V <sub>rms</sub>
between contact and coil	1500V <sub>rms</sub>
between adjacent contacts	1500V <sub>rms</sub>
between coil and frame	1500V <sub>rms</sub>
Initial insulation resistance between insulated elements	100MΩ at 500VDC

## Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at [www.te.com/customersupport/rohssupportcenter](http://www.te.com/customersupport/rohssupportcenter)

Ambient temperature  $-45^{\circ}\text{C}$  to  $70^{\circ}\text{C}$

Category of environmental protection IEC 61810 RTI - dust protected

## KHA Series Panel Plug-in Relay (Continued)

**Other Data (continued)**

Terminal type	solder/plug-in .105" (2.67mm), pcb-tht .112" (2.84mm)
Weight	45g
Packaging/unit	tray/50 pcs., box/250pcs.

**Accessories**



 For details see datasheet [Sockets and Accessories, KHA Relays](#)

Product Code	Description
27E894	DIN socket (use 20C426 clip)
27E166	Panel/track mount socket (use 20C297 clip)
27E006	Solder/grounding socket (use 20C217 clip)
27E007	PCB/grounding socket (use 20C217 clip)

**NOTE:** Relays with contact current <50mA are not recommended for use in sockets.

**Dimensions**


KHAU and KHAX types

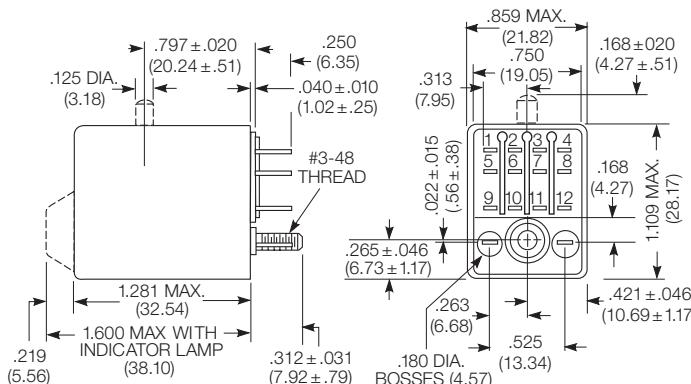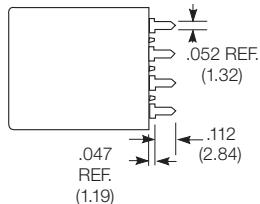
 PCB terminals  
 KHAE and KHAF types



Printed circuit terminal thickness .022 (.558)

**Terminal assignment**

2 form C



4 form C




Polarity shown for LED indicator

**PCB layout**

Bottom view on solder pins

4 pole version

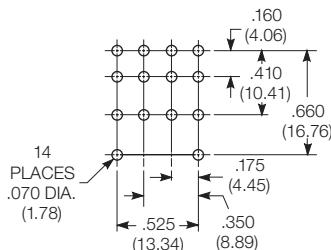

## KHA Series Panel Plug-in Relay (Continued)

Product code structure	Typical product code	KHA	U	-17	A	1	1	B	-120
<b>Type</b>									
<b>KHA</b> General purpose multi-contact relay Note: Some KHA models available in KH construction. Specify KH instead of KHA.									
<b>Version</b>									
<b>E</b> Printed circuit terminals, nylon dust cover, contacts rated opposite polarity (UL & CSA) <b>U</b> Solder terminals, clear polycarbonate dust cover, contacts rated same polarity (UL & CSA) <b>F</b> Printed circuit terminals, nylon dust cover, contacts rated same polarity (UL & CSA) <b>X</b> Solder terminals, clear polycarbonate dust cover, contacts rated opposite polarity (UL & CSA)									
<b>Contact arrangement</b>									
11 2 form C (2CO)      17 4 form C (4CO)									
<b>Coil input</b>									
A AC      D DC									
<b>Mounting and termination</b>									
<b>1</b> Socket mount, solder terminals on U versions; printed circuit terminals on E versions <b>T</b> Top flange mount, solder terminals on U versions; printed circuit terminals on E versions Note 1: Mounting options with solder terminals and stud on narrow, broad and end side on request									
<b>Contact material</b>									
<b>1</b> Ag <b>2</b> AgCdO <b>3</b> Au-AgNi (Note 2) <b>6</b> Bifurcated crossbar, Au overlay Ag <b>8</b> Au diffused Ag									
Note 2: contact material code 3 is not available with relay version E									
<b>Options</b>									
<b>B</b> Push to test button. (not available on version E relays with 4 form C contacts) <b>N</b> Neon indicator. Only available with version U, 120VAC or 110VDC coils. <b>H</b> Neon indicator and push to test button. Only available with version U, 120VAC or 110VDC coils <b>L</b> LED indicator. Only available with version U, 6-48VAC or VDC coils. <b>M</b> LED indicator and push to test button. Only available with version U, 6-46VAC or VDC coils.									
<b>Coil voltage</b>									
Coil code: please refer to coil versions table									

Product Code	Arrangement	Contact Material	Coil	Terminals	Options	Part Number
KHAU-11A11-120	2 form C, 2 CO	Ag	120VAC	Solder/Plug-in	None	1-1393122-0
KHAU-11D11-24			24VDC			1-1393122-5
KHAE-17D12-24	4 form C, 4 CO	AgCdO		PCB		1393122-1
KHAU-17A11-12		Ag	12VAC	Solder/Plug-in		1-1393122-9
KHAU-17A11-24			24VAC	Solder		2-1393122-1
KHAU-17A11-120			120VAC		Indicator	2-1393122-0
KHAU-17A11N-120					None	2-1393122-6
KHAU-17A12-120		AgCdO				2-1393122-8
KHAU-17A13-120		Au-Ag-Ni				3-1393122-6
KHAU-17A16-24		Bifurcated, Au overlay Ag	24VAC			3-1393122-8
KHAU-17A16-120		Ag	120VAC			3-1393122-7
KHAU-17A18-120		Au diffused Ag				3-1393122-9
KHAU-17D11-6		Ag	6VDC			4-1393122-7
KHAU-17D11-12			12VDC			4-1393122-3
KHAU-17D11-24			24VDC			4-1393122-4
KHAU-17D11-48			48VDC			4-1393122-5
KHAU-17D11-110			110VDC			4-1393122-2
KHAU-17D12-12		AgCdO	12VDC			5-1393122-5
KHAU-17D12-24			24VDC			5-1393122-7
KHAU-17D12-48			48VDC			5-1393122-8
KHAU-17D12-110			110VDC			5-1393122-4
KHAU-17D16-12		Bifurcated, Au overlay Ag	12VDC			7-1393122-0
KHAU-17D16-24		Ag	24VDC			7-1393122-1
KHU-17A11N-120			120VAC		Indicator, Old Const.	2-1393123-8
KHU-17D11-12			12VDC		Old Construction	4-1393123-0
KHU-17D12-24		AgCdO	24VDC			4-1393123-8

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[KHAU-17D11L-24](#)