


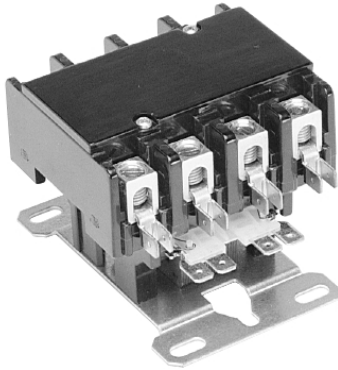

Model 93 - 3100 series

Definite Purpose Contactor 4-pole, 25-40 FLA AC Coil

UL File E75492
CE File EN60947-4-1:2010+A1
AC1:40A 480VAC, AC3: 30A 480VAC

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

Features

- 4-pole contactors.
- Convenient "universal" mounting plate.
- Optional interlock/auxiliary switches available.

Contact Data @ 25°C

Arrangements: 4 Form X (4PST-NO-DM).
Maximum Ratings: See Contact Ratings Table.
Material: Silver Cadmium Oxide.

Coil Data @ 25°C

Voltage: 24 - 480 VAC, 50/60 Hz. See Coil Data Table below.
Insulation Class: UL Class B (130°C).
Duty Cycle: Continuous.

Environmental Data

Temperature Range: Storage and Operating: -40°C – +65°C.
Flammability: UL 94-HB housing.

Mechanical Data

Contact Termination:

25, 30 FLA Models

Type: #10-32 Screw with quad 0.250" (6.35 mm) quick connects.
Wire Size: 16-8 AWG (Stranding must be split for 8 AWG wire.)
Tightening Torque: 25 in.-lbs.

40 FLA Models

Type: Box Lug with dual 0.250" (6.35 mm) quick connects.
Wire Size: 14-4 Cu/Al AWG
Tightening Torque: 40 in.-lbs.

Coil Termination: Dual 0.250" (6.35 mm) quick connects, standard.
A 0.250" quick connect and a #6-32 screw, optional.

Arc Cover: Optional on 25-30 FLA models, standard on 40 FLA models.
Weight: 24 oz. (683 g) approximately

Contact Ratings

Full Load Amps	Number of Poles	Line Voltage	Locked Rotor Amps	Resistive Amps Rating	Maximum Horsepower		
					Voltage	Single Phase	Three Phase
25	4	240/277	150	35	110/120	2	-
		480	125	35	200/208	-	7.5
		600	100	35	240/277	5	10
					480	-	15
30	4	240/277	180	40	110/120	2	-
		480	150	40	200/208	-	10
		600	120	40	240/277	5	10
					480	-	15
40	4	240/277	240	50	110/120	3	-
		480	200	50	200/208	-	10
		600	160	50	240/277	7.5	10
					480	-	20

Coil Data

Nominal Coil Voltage	24	120	208/240	277	480
Maximum Pickup Volts	19.2	93	177	220	384
Drop-Out Volts Range	6 -15	20 - 70	40 - 140	50-185	150 - 270
Nominal Inrush VA @ 50 Hz	68	68	68	58	48
Nominal Inrush VA @ 60 Hz	60	60	60	52	52
Nominal Sealed VA @ 50 Hz	14	14	14	11	11
Nominal Sealed VA @ 60 Hz	10	10	10.5	10.5	10
Nominal DC Resistance - Ohms	5	148	520	750	2700


Ordering Information

Typical Part No. ►		3100	-	40	Q	9	999
1. Series: 3100 = 4-pole, 25-40 FLA contactor							
2. Packaging: Y = Individual Pack - = Bulk Pack A-ZZ = Customer specific information (assigned by factory)							
3. Pole Configuration: 40 = 4 Form X (4PST-NO-DM)							
4. Coil Voltage (50/60 Hz.): Q = 24VAC U = 208/240VAC H = 480VAC J = 120VAC, molded M = 277VAC, molded T = 120VAC V = 277VAC I = 24VAC, molded K = 208/240VAC, molded W = 480VAC, molded							
5. Contact Ratings (Inductive): 8 = 25 FLA 9 = 30 FLA 10 = 40 FLA							
6. Customer ID Suffix: 999 = Standard Model 000-998 = Factory assigned customer ID							
7. Option Code: A - ZZ = Factory assigned customer-specific options.							

Standard part numbers listed below are more likely to be available from stock.


None at present.

Outline Dimensions

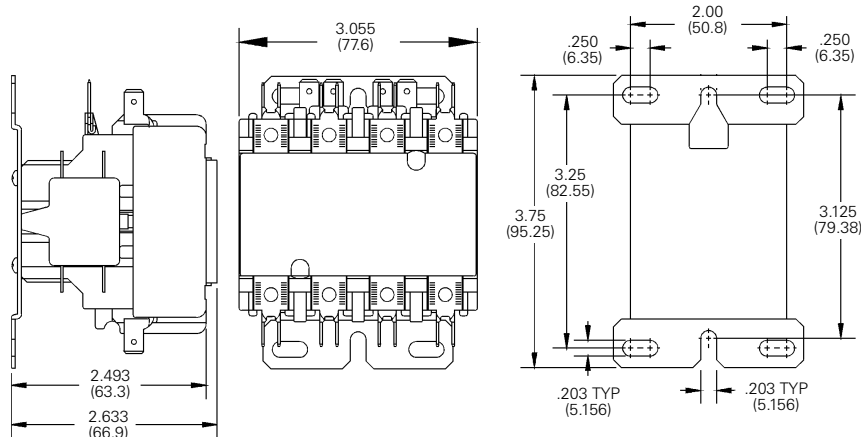

Shown with Optional Auxiliary Switch

Termination Options

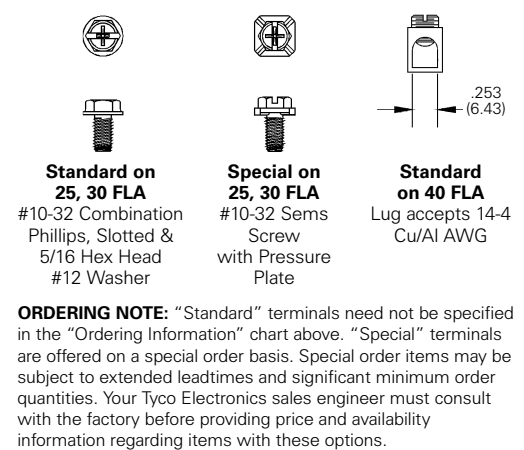

Auxiliary Switches

Various interlock / auxiliary switches are available for the Model 93 contactor.



NORMALLY OPEN & CLOSED
34220-332N

SPDT
34220-337N

Equipped with 0.250" (6.35) Quick Connect Terminals

Description	Factory Modifications		Field Added Kits	
	Contact Config.	NO	NC	Kit Catalog Number Number of Kits Required
Single unit interlock configurations listed. Maximum of two. Must be same polarity. See footnote (1) for ratings.	1	1		34220-332N 1
	2	2		34220-332N 2
SPDT Circuit See footnote (2) for ratings.	1	1		34220-337N 1
	2	2		34220-337N 2

Footnotes: Ratings of Auxiliary Interlocks / Switches

(1) Contact Rating Single Circuit NO or NC and two circuit NO/NC:		(2) Contact Rating SPDT (337):	
		10A, 1/3 HP, 125 or 250 VAC	
		1/2A, 125 VDC; 1/4A, 250 VDC:	
		4A 120 VAC on Lamp Load	
Break	120V 3.0A	240V 1.5A	480V 0.75A
Make	30A	15A	7.5A
Continuous	10A	10A	10A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-1611021-2](#)