Comments

TOGGLE SWITCH, MTA SERIES

VERTICAL MOUNT

SCALE 2:1 SHEET 1 OF 3 REV E5

RESTRICTED TO

SIZE CAGE CODE DRAWING NO

(1 00779 **C-**1-1437558-0

REVISIONS


10
9 3 4 6 5 1

$\square$ $\square$	SCALE

	Materials							
No.	Component name	Base material	Finish					
1	Housing	High temp, UL 94V-0, green						
2	End terminal	silver clad copper alloy	5 microinches min. gold					
3	Center terminal	copper alloy	5 microinches min. gold					
4	Rocker contact	silver clad copper alloy	5 microinches min. gold					
5	Actuator	Phenol resin, UL94 HB, black						
6	Plunger	stainless steel						
7	Spring	music wire						
8	Toggle	brass	chrome or nickel					
9	Retainer	Polyamide, UL94 HB, black						
	Frame	cold rolled steel	zinc or nickel					
11	Bushing	brass	100 microinches min. nickel over 10 microinches min. copper					
12	Mounting nuts (2)	brass	200 microinches min. bright nickel					
13	Locating ring	cold rolled steel	zinc or nickel					
14	Internal tooth lockwasher	steel	zinc or nickel					

	Specifications-see note 3				7
Current rating UL & CSA	6A @ 125 VAC (resistive)				
	3A @ 250 VAC (resistive)				8
	4A @ 28 VDC (resistive)				8
Termination resistance	20 milliohms max @ 2-4 VDC,	1 A			
Insulation resistance	1,000 megohms min.				
Withstanding voltage	1,000 VAC				
Travel	24 + /-6 degrees				8
Actuation force	.05 to 1.5 kgf				8
Operating temperature	-20C to +85C				
Storage temperature	-40C to +85C				
Contact timing	break before make				
Terminal seal	epoxy or insert molded				
Durability	Parameter	2 Position	3 Position	Momentary	
	mechanical (no load)	150,000	100,000	80,000	8
	250 VAC (3A resistive)	80,000	60,000	60,000	
	125 VAC (6A resistive)	80,000	60,000	60,000	8
	28 VDC (4A resistive)	60,000	50,000	40,000	
					_ 

RECOMMENDED (	PANEL LAYOUT
TO PREVENT ROTATION	TO PREVENT ROTATION
.253 .231 .228 .035 .030	.254 .234 .234 .098 .092

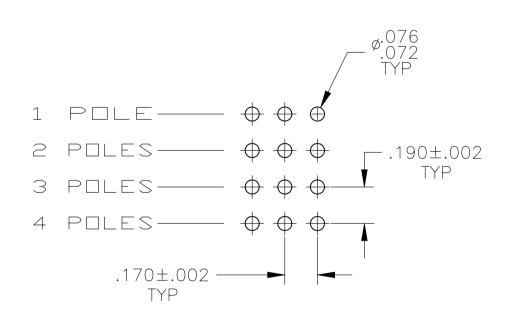

**Part** 

Number

Alco Model Poles Throws Function

PC BOARD LAYOUT PC TERMINAL ONLY

- 1. TERMINAL NUMBERS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON THE SWITCHES.

- (1) LOCATING RING

2.	EACH SWITCH SUPPLIED WITH THE F	FOLLOWING	MOUNTING	HARDWARL:	
	(2) $1/4-40$ UNS-2B HEX NUTS				
	(1) INTERNAL TOOTH LOCKWASHER				

- 5. WIRE LUG CONTACTS WILL ACCEPT 2 #20 AWG SOLID OR STRANDED WIRES. 6. CUSTOMER INSTALLED EXTERNAL JUMPER BETWEEN TERMINALS 2 AND 4 REQUIRED FOR 1 POLE 3 THROW FUNCTION. 7. CUSTOMER INSTALLED EXTERNAL JUMPERS BETWEEN TERMINALS 2 AND 4 AS WELL AS 8 AND 10 REQUIRED FOR 2 POLE 3 THROW FUNCTION.

OBSOLETE

9. LASER MARKING USED FOR PARTS.

							3 2 1	321	3 2 1		
							654	654	6 5 4		
							987	987	987		
							12 11 10	12 11 10	12 11 10		
		4-1437558-8 MTA406PPC	4	2	ON OFF ON	PC	2-3, 5-6, 8-9, 11-12	Off	2-1, 5-4, 8-7, 11-10	,	
	8	4-1437558-7 MTA406PAPC	2	3	ON ON ON	PC	5-6, 11-12	5-3, 11-9	5-1, 11-7	note 7	
	/8	4-1437558-6 MTA406PA	2	3	ON ON ON	Wire lug	5-6, 11-12	5-3, 11-9	5-1, 11-7	note 7	
		4-1437558-5 MTA406P	4	2	ON OFF ON	Wire lug	2-3, 5-6, 8-9, 11-12	Off	2-1, $5-4$ , $8-7$ , $11-10$	1	
		4-1437558-4 MTA406NPC	4	2	ON ON	PC	2-3, 5-6, 8-9, 11-12		2-1, $5-4$ , $8-7$ , $11-10$	,	
		4-1437558-3 MTA406N	4	2	ON ON	Wire lug	2-3, 5-6, 8-9, 11-12		2-1, $5-4$ , $8-7$ , $11-10$	<i>t</i>	
	8	4-1437558-2 MTA306HPC	3	2	ON OFF(ON)	PC	2-3, 5-6, 8-9	Off	2-1, 5-4, 8-7		
	8	4-1437558-1 MTA306H	3	2	ON OFF(ON)	Wire lug	2-3, 5-6, 8-9	Off	2-1, 5-4, 8-7		
		4-1437558-0 MTA306FPC	3	2	ON (ON)	PC	2-3, 5-6, 8-9		2-1, 5-4, 8-7		
		3-1437558-9 MTA306F	3	2	ON (ON)	Wire lug	2-3, 5-6, 8-9		2-1, 5-4, 8-7		
		3-1437558-8 MTA306EPC	3	2	ON OFF ON	PC	2-3, 5-6, 8-9	Off	2-1, 5-4, 8-7		
		3-1437558-7 MTA306E	3	2	ON OFF ON	Wire lug	2-3, 5-6, 8-9	Off	2-1, 5-4, 8-7		
		3-1437558-6 MTA306DPC	3	2	ON ON	PC	2-3, 5-6, 8-9		2-1, 5-4, 8-7		
		3-1437558-5 MTA306D	3	2	ON ON	Wire lug	2-3, 5-6, 8-9		2-1, 5-4, 8-7		
00	8	3-1437558-4 MTA206TPC	2	2	ON OFF(ON)	PC	2-3, 5-6	OFF	2-1, 5-4		
00		3-1437558-3 MTA206TA	1	3	ON ON (ON)	Wire lug	5-6	5-3	5-1	note 6	
	8	3-1437558-2 MTA206T	2	2	ON OFF(ON)	Wire lug		OFF	2-1, 5-4		
000		3-1437558-1 MTA206SPC	2	2	(ON) OFF (ON)	PC	2-3, 5-6	OFF	2-1, 5-4		
	8	3-1437558-0 MTA206SA	1	3	(ON) ON (ON)	Wire lug		5-3	5-1	note 6	
		2-1437558-9 MTA206S	2	2	(ON) OFF (ON)	Wire lug	·	OFF	2-1, 5-4		
		2-1437558-8 MTA206RPC	2	2	ON (ON)	PC	2-3, 5-6		2-1, 5-4		
		2-1437558-7 MTA206R	2	2	ON (ON)	Wire lug	·		2-1, 5-4		
	_	2-1437558-5 MTA206PPC	2	2	ON OFF ON	PC	2-3, 5-6	OFF	2-1, 5-4		
	8	2-1437558-4 MTA206PAPC	1	3	ON ON ON	PC	5-6	5-3	5-1	note 6	
	8	2-1437558-3 MTA206PA	1	3	ON ON ON	Wire lug		5-3	5-1	note 6	
		2-1437558-2 MTA206P	2	2	ON OFF ON	Wire lug		OFF	2-1, 5-4		
	8	2-1437558-1 MTA206NPC	2	2	ON ON	PC	2-3, 5-6		2-1, 5-4		
	_	2-1437558-0 MTA206N	2	2	ON ON	Wire lug			2-1, 5-4		
	8	1-1437558-9 MTA106HPC	1	2	ON OFF(ON)	PC	2-3	OFF	2-1		
	8	1-1437558-8 MTA106H	1	2	ON OFF(ON)	Wire lug		OFF	2-1		
		1-1437558-7 MTA106GPC	1	2	(ON) OFF (ON)	PC	2-3	OFF	2-1		
		1-1437558-6 MTA106G	1	2	(ON) OFF (ON)	Wire lug		OFF	2-1		
		1-1437558-5 MTA106FPC	1	2	ON (ON)	PC	2-3		2-1		
		1-1437558-4 MTA106F	1	2	ON (ON)	Wire lug			2-1		
		1-1437558-3 MTA106EPC	1	2	ON OFF ON	PC	2-3	Off	2-1		
		1-1437558-2 MTA106E	1	2	ON OFF ON	Wire lug		Off	2-1		
	_	1-1437558-1 MTA106DPC	1	2	ON ON	PC	2-3		2-1		
	8	1571616-1 MTA106DUL	1	2	ON ON	Wire lug			2-1		
		1-1437558-0 MTA106D	1	2	ON ON	Wire lug			2-1		
							THIS DRAWING IS A CONTROLLED	CHK	29DEC03 29DEC03 TE TE (	Connectivity Ltd.	
							DIMENSIONS: TOLERA	NCES LINIESS M.ZITTO			


INCHES

0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± .005
4 PLC ± .005


APPLICATION SPEC

USTOMER DRAWING

**Terminal** 

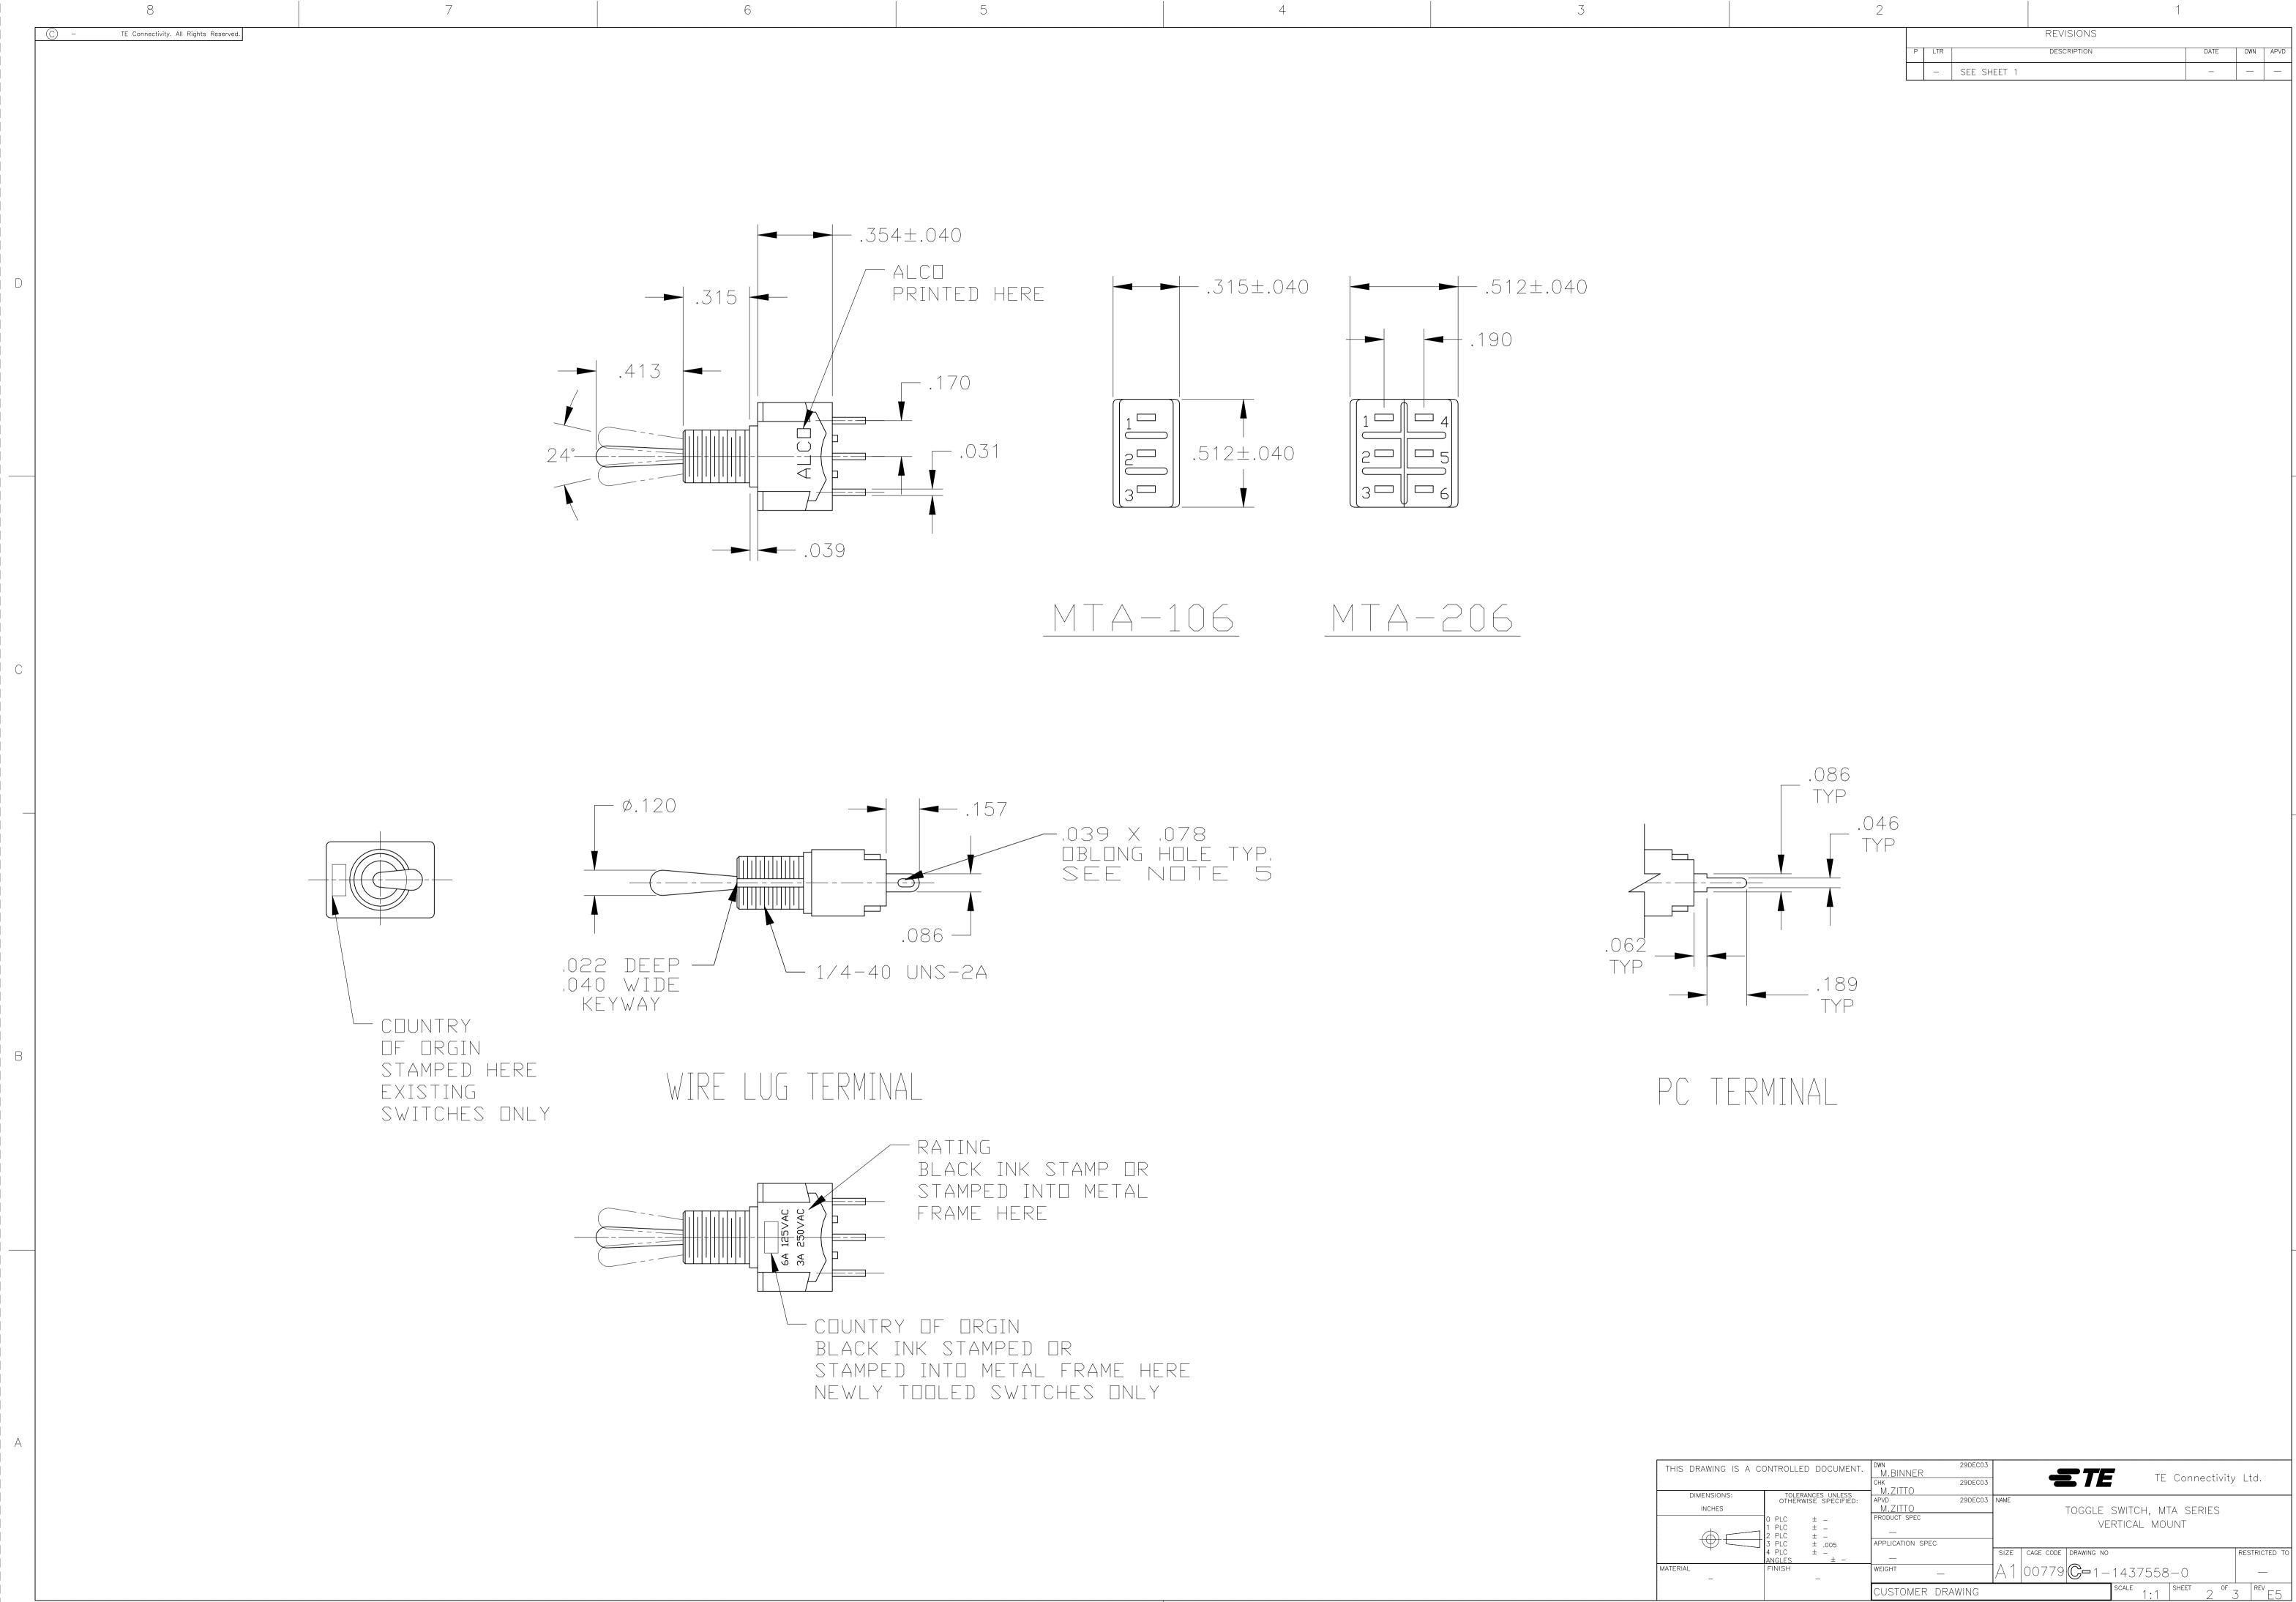

4805 (1/15)

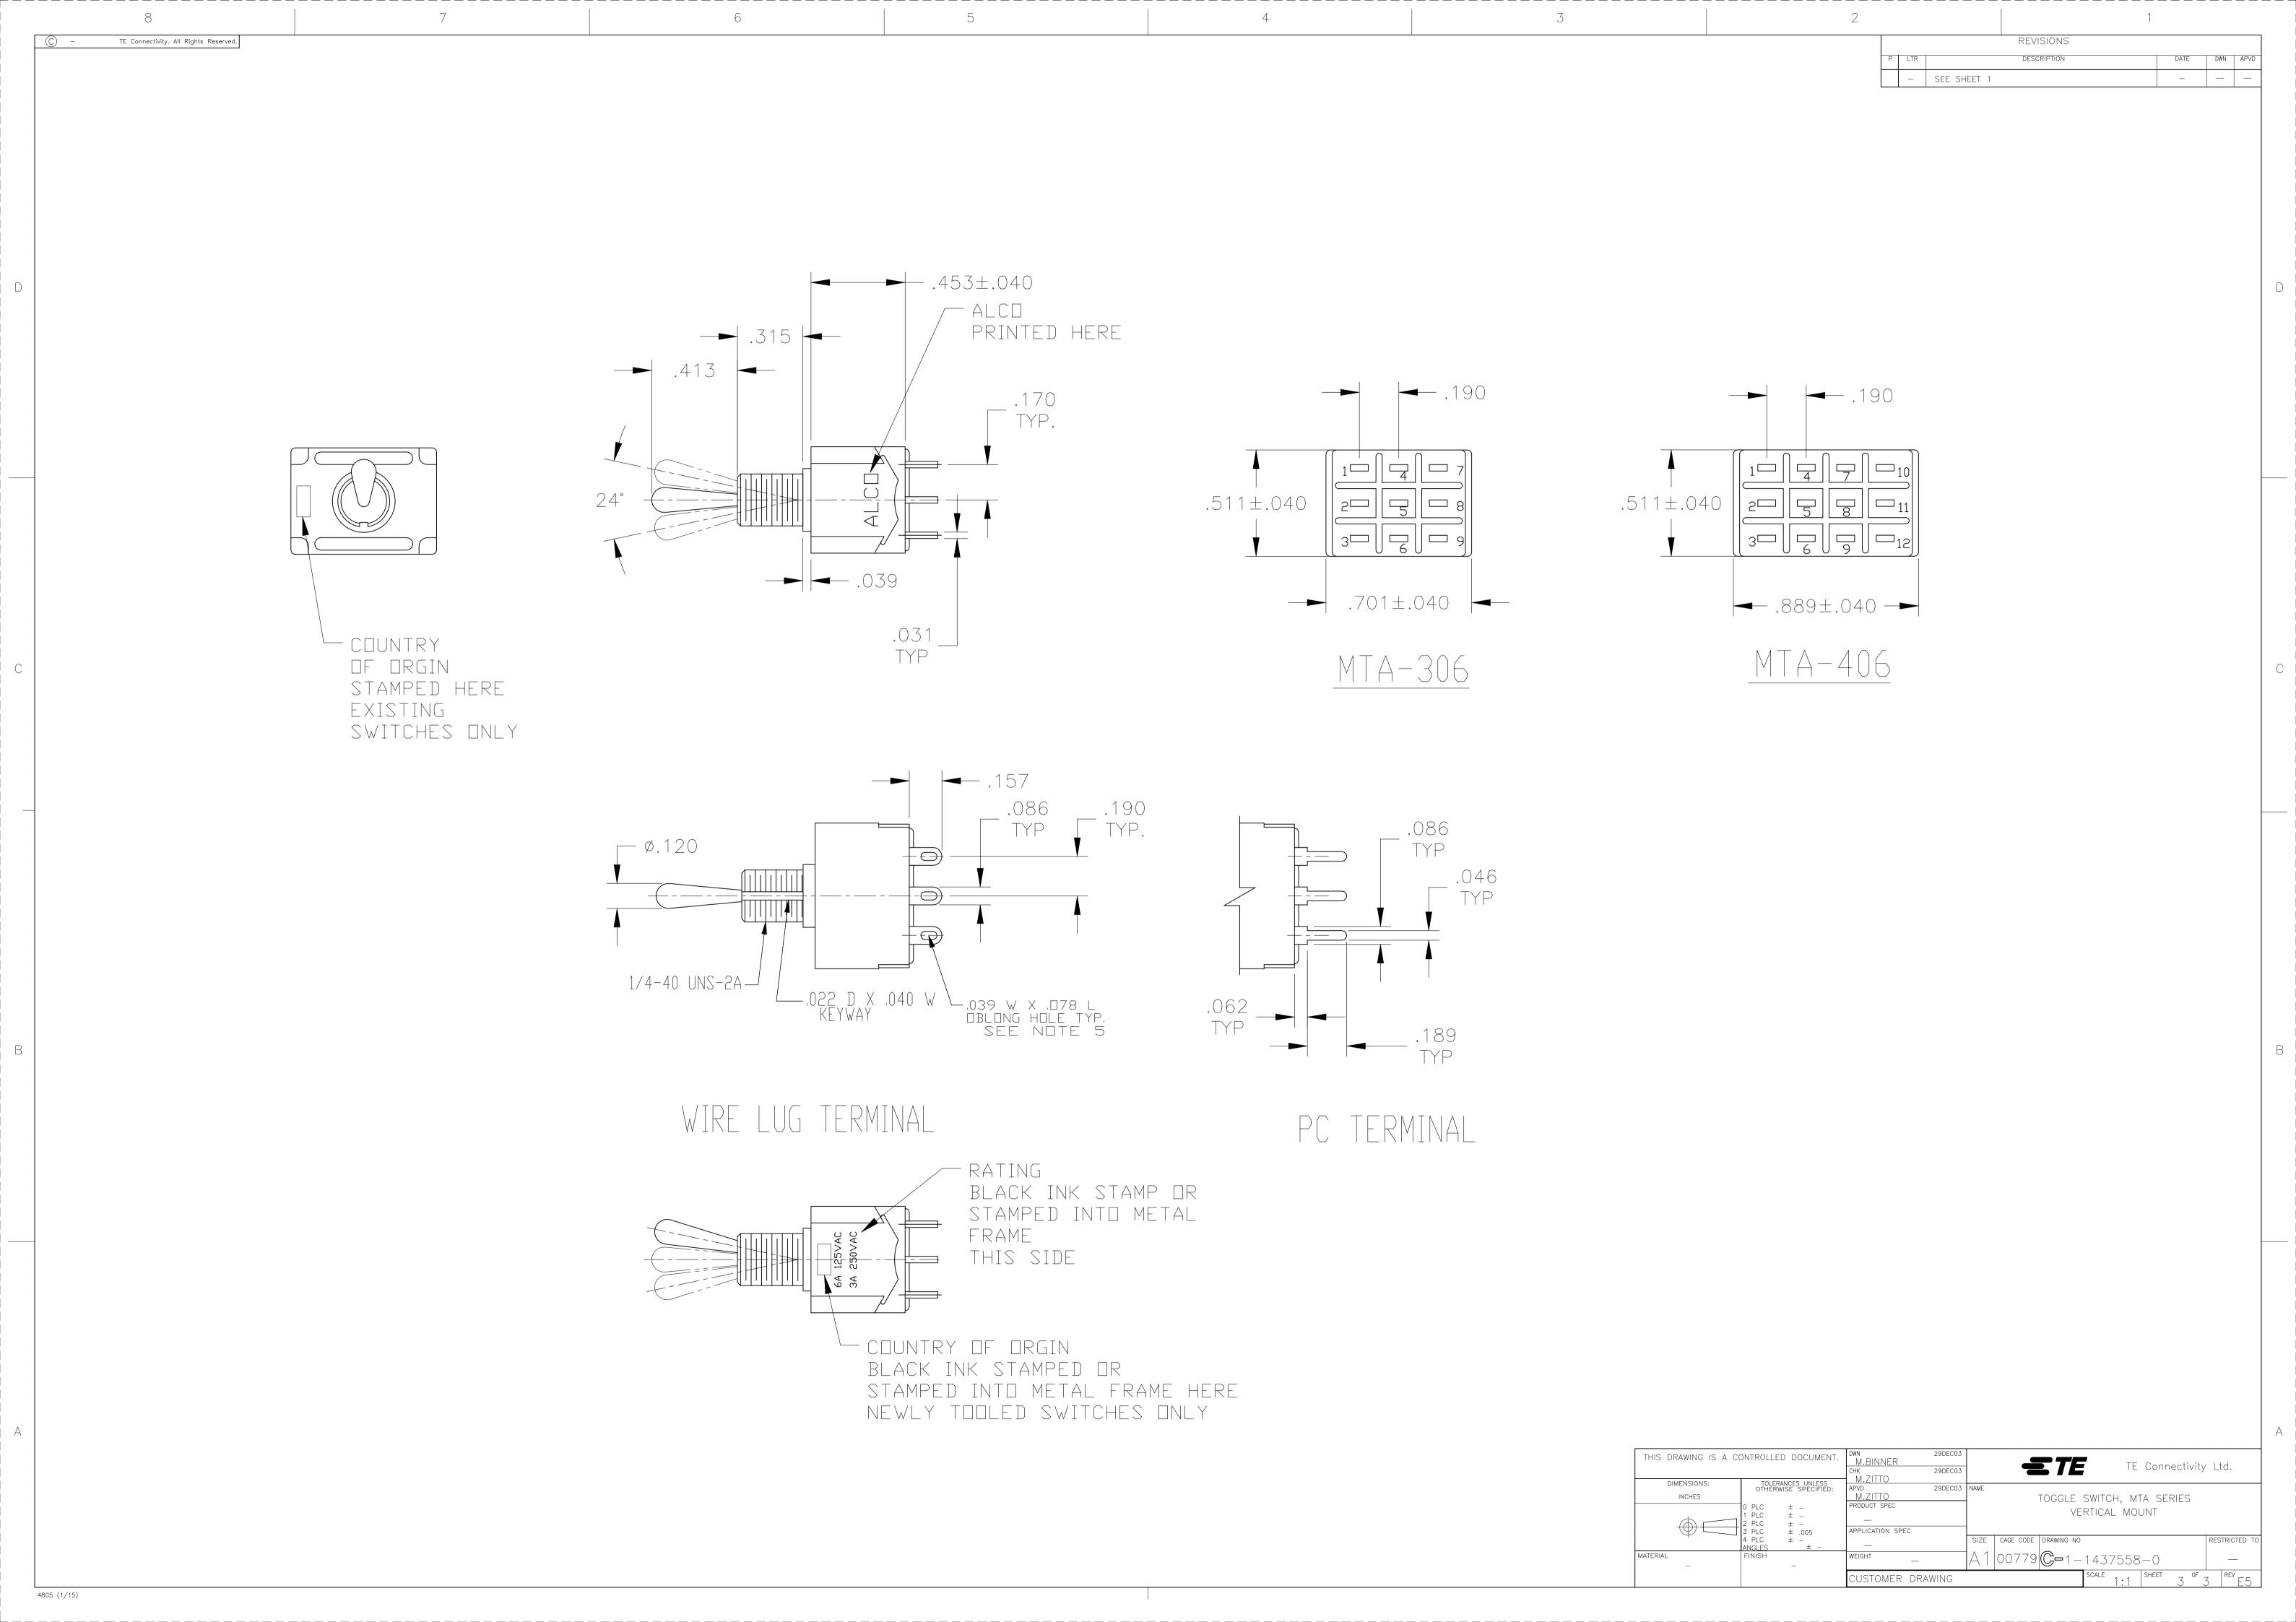

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: