


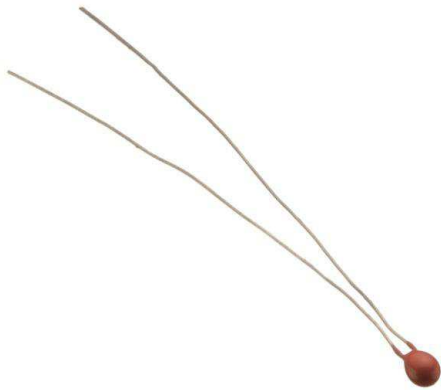

GA5K3A1 SERIES I THERMISTORS

Thermally Conductive Epoxy Coating

Ø 2.4 mm Maximum Diameter

32 AWG Alloy 180 Leads

Four Temperature Tolerance Classifications Available

RoHS Compliant

BetaCURVE series I thermistors are small epoxy coated devices with solid tin-plated lead wires. The series I offers a choice of precision temperature tolerance classifications for a wide variety of customer applications, such as temperature measurements, temperature indication, temperature control, and thermal compensation.


FEATURES

- Interchangeability
- Proven stability and reliability
- Rapid time response
- Alloy lead wires for reduced thermal conductivity ("stem effect")
- Thermally conductive epoxy coating
- Temperature range -40°C to +125°C
- Custom probe assemblies available

APPLICATIONS

- Temperature sensing, control and compensation
- Tight tolerance instrumentation
- General instrumentation applications

MECHANICAL DETAILS

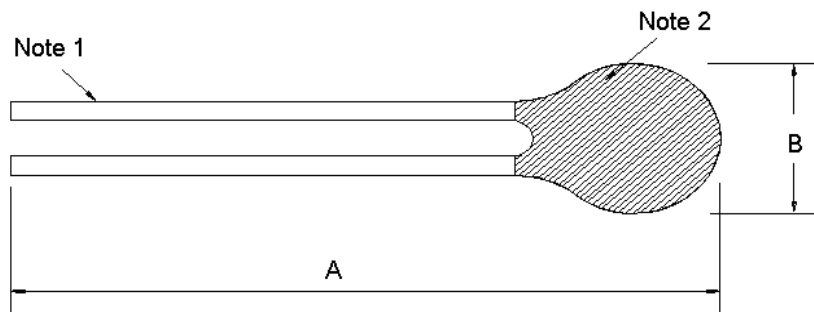

DIMENSIONS

A	B
76 ±2 mm	2.4 mm max.

Note 1: 32 AWG Solid Alloy 180 Leads

Note 2: Orange Stycast 2850ft Epoxy

PERFORMANCE SPECS

Parameters	Units	Value
Nominal Resistance at +25°C	Ohms	5,000
GA5K3A1A Resistance Tolerance from 0°C to +70°C	°C	±0.1
GA5K3A1B Resistance Tolerance from 0°C to +70°C	°C	±0.2
GA5K3A1C Resistance Tolerance from 0°C to +70°C	°C	±0.5
GA5K3A1D Resistance Tolerance from 0°C to +70°C	°C	±1.0
Alpha Value at +25°C	%/°C	4.39
Beta Value 25/85	K	3976
Tolerance on Beta Value 25/85	%	±0.5
Time Response in Liquids	Seconds	<1
Dissipation Constant in Still Air	mW/°C	0.75

RESISTANCE V TEMPERATURE TABLE

Temp. °C	Ohms	Temp. °C	Ohms	Temp. °C	Ohms	Temp. °C	Ohms
-40	167862	2	14750	44	2271	86	519
-39	157111	3	14027	45	2183	87	503
-38	147117	4	13344	46	2100	88	487
-37	137820	5	12698	47	2020	89	472
-36	129169	6	12086	48	1944	90	458
-35	121114	7	11508	49	1870	91	444
-34	113611	8	10961	50	1800	92	431
-33	106620	9	10443	51	1733	93	418
-32	100102	10	9952	52	1669	94	406
-31	94022	11	9487	53	1608	95	394
-30	88349	12	9046	54	1549	96	382
-29	83054	13	8629	55	1493	97	371
-28	78107	14	8233	56	1438	98	360
-27	73486	15	7857	57	1387	99	349
-26	69166	16	7501	58	1337	100	339
-25	65127	17	7162	59	1289	101	330
-24	61348	18	6841	60	1244	102	320
-23	57811	19	6536	61	1200	103	311
-22	54499	20	6247	62	1158	104	302
-21	51397	21	5972	63	1117	105	294
-20	48490	22	5710	64	1078	106	285
-19	45765	23	5461	65	1041	107	277
-18	43210	24	5225	66	1005	108	270
-17	40812	25	5000	67	971	109	262
-16	38562	26	4786	68	938	110	255
-15	36450	27	4582	69	906	111	248
-14	34465	28	4388	70	876	112	241
-13	32601	29	4204	71	847	113	235
-12	30848	30	4028	72	818	114	228
-11	29200	31	3860	73	791	115	222
-10	27649	32	3701	74	765	116	216
-9	26191	33	3549	75	740	117	211
-8	24817	34	3403	76	716	118	205
-7	23524	35	3265	77	693	119	200
-6	22306	36	3133	78	670	120	194
-5	21158	37	3007	79	649	121	189
-4	20075	38	2887	80	628	122	184
-3	19055	39	2772	81	608	123	180
-2	18092	40	2662	82	589	124	175
-1	17183	41	2558	83	570	125	170
0	16325	42	2458	84	553		
1	15515	43	2362	85	535		

ORDERING INFORMATION

Part Number	Description	Ω @25°C	MOQ*
GA5K3A1A	Series I thermistor	5,000	1,000
GA5K3A1B	Series I thermistor	5,000	1,000
GA5K3A1C	Series I thermistor	5,000	1,000
GA5K3A1D	Series I thermistor	5,000	1,000

* For quantities less than MOQ (Minimum Order Quantity) contact Distribution

NORTH AMERICA
Tel +1 800 522 6752
customercare.ando@te.com

EUROPE
Tel +31 73 624 6999
customercare.glw@te.com

ASIA
Tel +86 0400 820 6015
customercare.chdu@te.com

te.com/sensorsolutions

BetaCurve, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[GA5K3A1B](#)