

te.com



## **LL-01 SERIES**

## **RELAY VERSION**

Proven ultrasonic technology combined with compact electronics

Improved performance in aerated liquids

Cost effective design for tight spaces and direct replacement of electro optical and mechanical float switch

The LL-01 series Ultrasonic Sentio™ Miniature Liquid Level Switch uses proven ultrasonic technology combined with compact electronics yielding improved performance in aerated liquids.

#### **Features**

Standard Features

- High pressure up to 250 PSIG (1724 KPa)
- Relay output, SPST (NO or NC)
- No moving parts, easy to install
- Input 5.5 to 30 VDC
- Digital filter techniques enhance performance

#### **Optional Features**

- Temperature options: 80℃ or 100℃
- Mounting options: 1/4" NPT or 1/2" NPT
- Power Loop version also available (Wet 20±1 mA; Dry 4±1 mA)

## **Applications**

- Pump protection
- Storage tanks
- Compressors
- Medical and laboratory equipment
- Hydraulic supply lines
- Oil film detection
- · Coolant reservoirs
- · Boiler water cutoff
- Sewage systems
- Pipelines
- Hydraulic and lube reservoirs
- Chillers

## **Specifications**

Repeatability 2 mm or better

 Delay
 0.5 seconds

 Input Power
 5.5 to 30 VDC

Output (standard) Solid state relay, SPST

Peak Load Voltage 100V (AC or DC), inductive loads must be diode bypassed

Continuous Load Current 3.5 A <25℃ derating to 0.75A@100℃

EMC EN 61326-1 for fixed cable lengths <30 meters and not powered from a

DC distribution system; Emissions Group 1 Class A

Sensor Material 316L Stainless Steel


**Temperature** -20 to +176♥ (-29 to 80℃) or -20 to +212♥ (-29 to 100℃)

Operating Pressure Up to 250 PSIG (1724 KPa)

Mounting ¼" NPT or ½" NPT

Cable Length 1, 4, 10, & 20 foot lengths available

## Mechanical Dimensions in inches [mm]






Figure 1

Left: LL-01 series element with 1/4" NPT sensor mounting

Right: LL-01 series element with ½" NPT sensor mounting

**Typical Wiring Diagram** 





Figure 2 Typical wiring diagram for LL-01 series elements

## **Ordering Information**

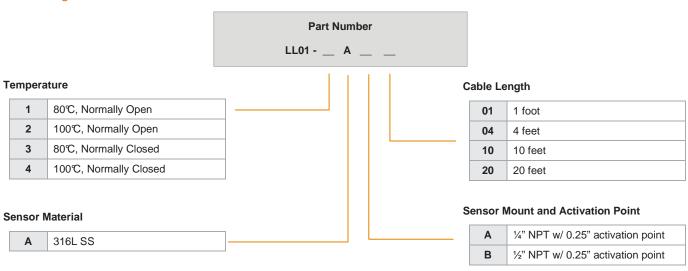

### **NORTH AMERICA**

TE Connectivity Company Phone +1-800-522-6752 Email: customercare.hmpt@te.com

#### **EUROPE**

TE Connectivity Company Phone: +49-800-440-5100 Email: customercare.tlse@te.com

#### **ASIA**

TE Connectivity Company Phone: +86-400-820-6015 Email: customercare.shzn@te.com

#### te.com

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Corporation. All Rights Reserved.

Version # 11/2021

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: