




8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
COPYRIGHT 20				BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.			
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION	
1852259-1		A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER	
1852259-2		A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER	
1852259-3		A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER	
1852259-6		A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER	
7-1852259-7		A	-	-	-	SPARE PARTS	

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE


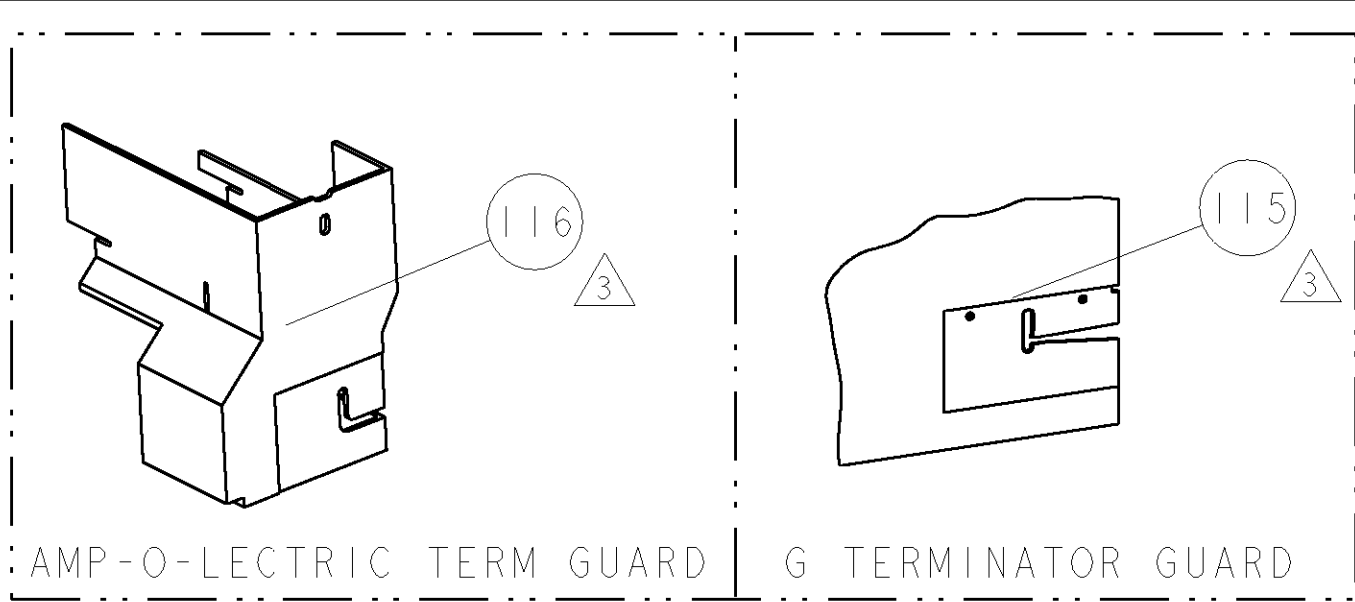


TERMINAL NAME: TAXI TERM F M/P 280					
TYCO PN	MFG PN	PACKARD TERMINAL - AMP CRIMP SPECS			
1949042	12129663				
-	-	PAD LTR	CRIMP HEIGHT	WIRE SIZE	
-	-	A	2.15±0.05mm [.085±.002]	3.00mm2 OR 12 AWG	
-	-	B	-	-	
-	-	C	-	-	
-	-	D	-	-	
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	3.61mm [.142]	F	3.00mm2
-	-	INSUL	3.61mm [.142]	F	Ø 3.04-3.20mm
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPL INSTRUCTIONS	SET UP GAGE	
5.2-6.0mm	NONE	15.3mm	408-8040	458637-1	

LOC		DIST		REVISONS			
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		RELEASED	24MAY2006	LG	TE

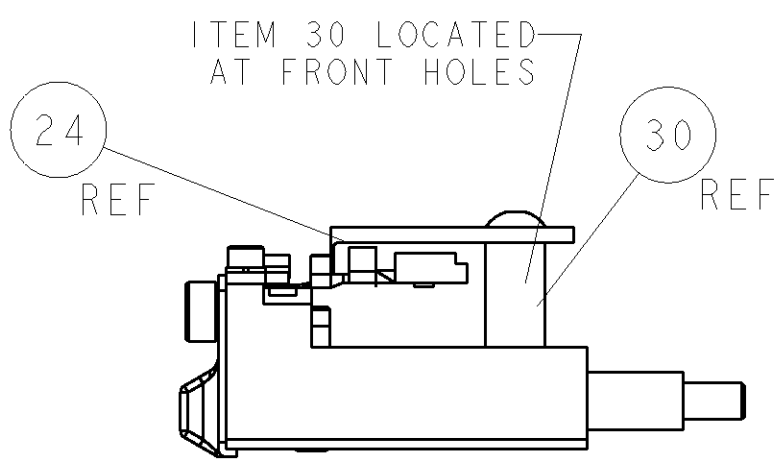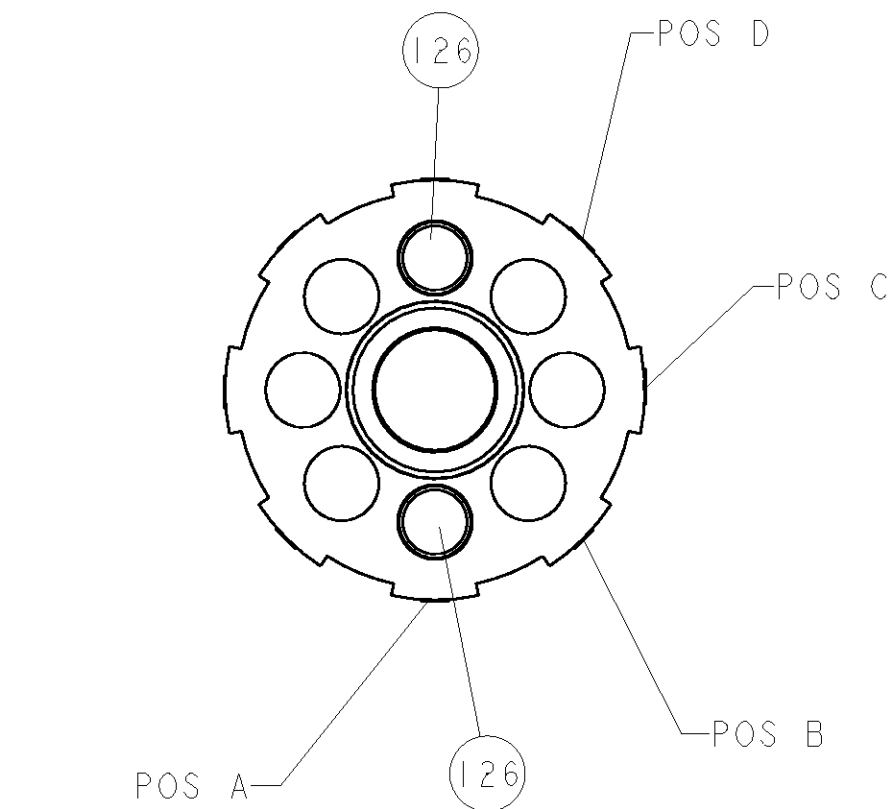

FEED TRACK POSITION

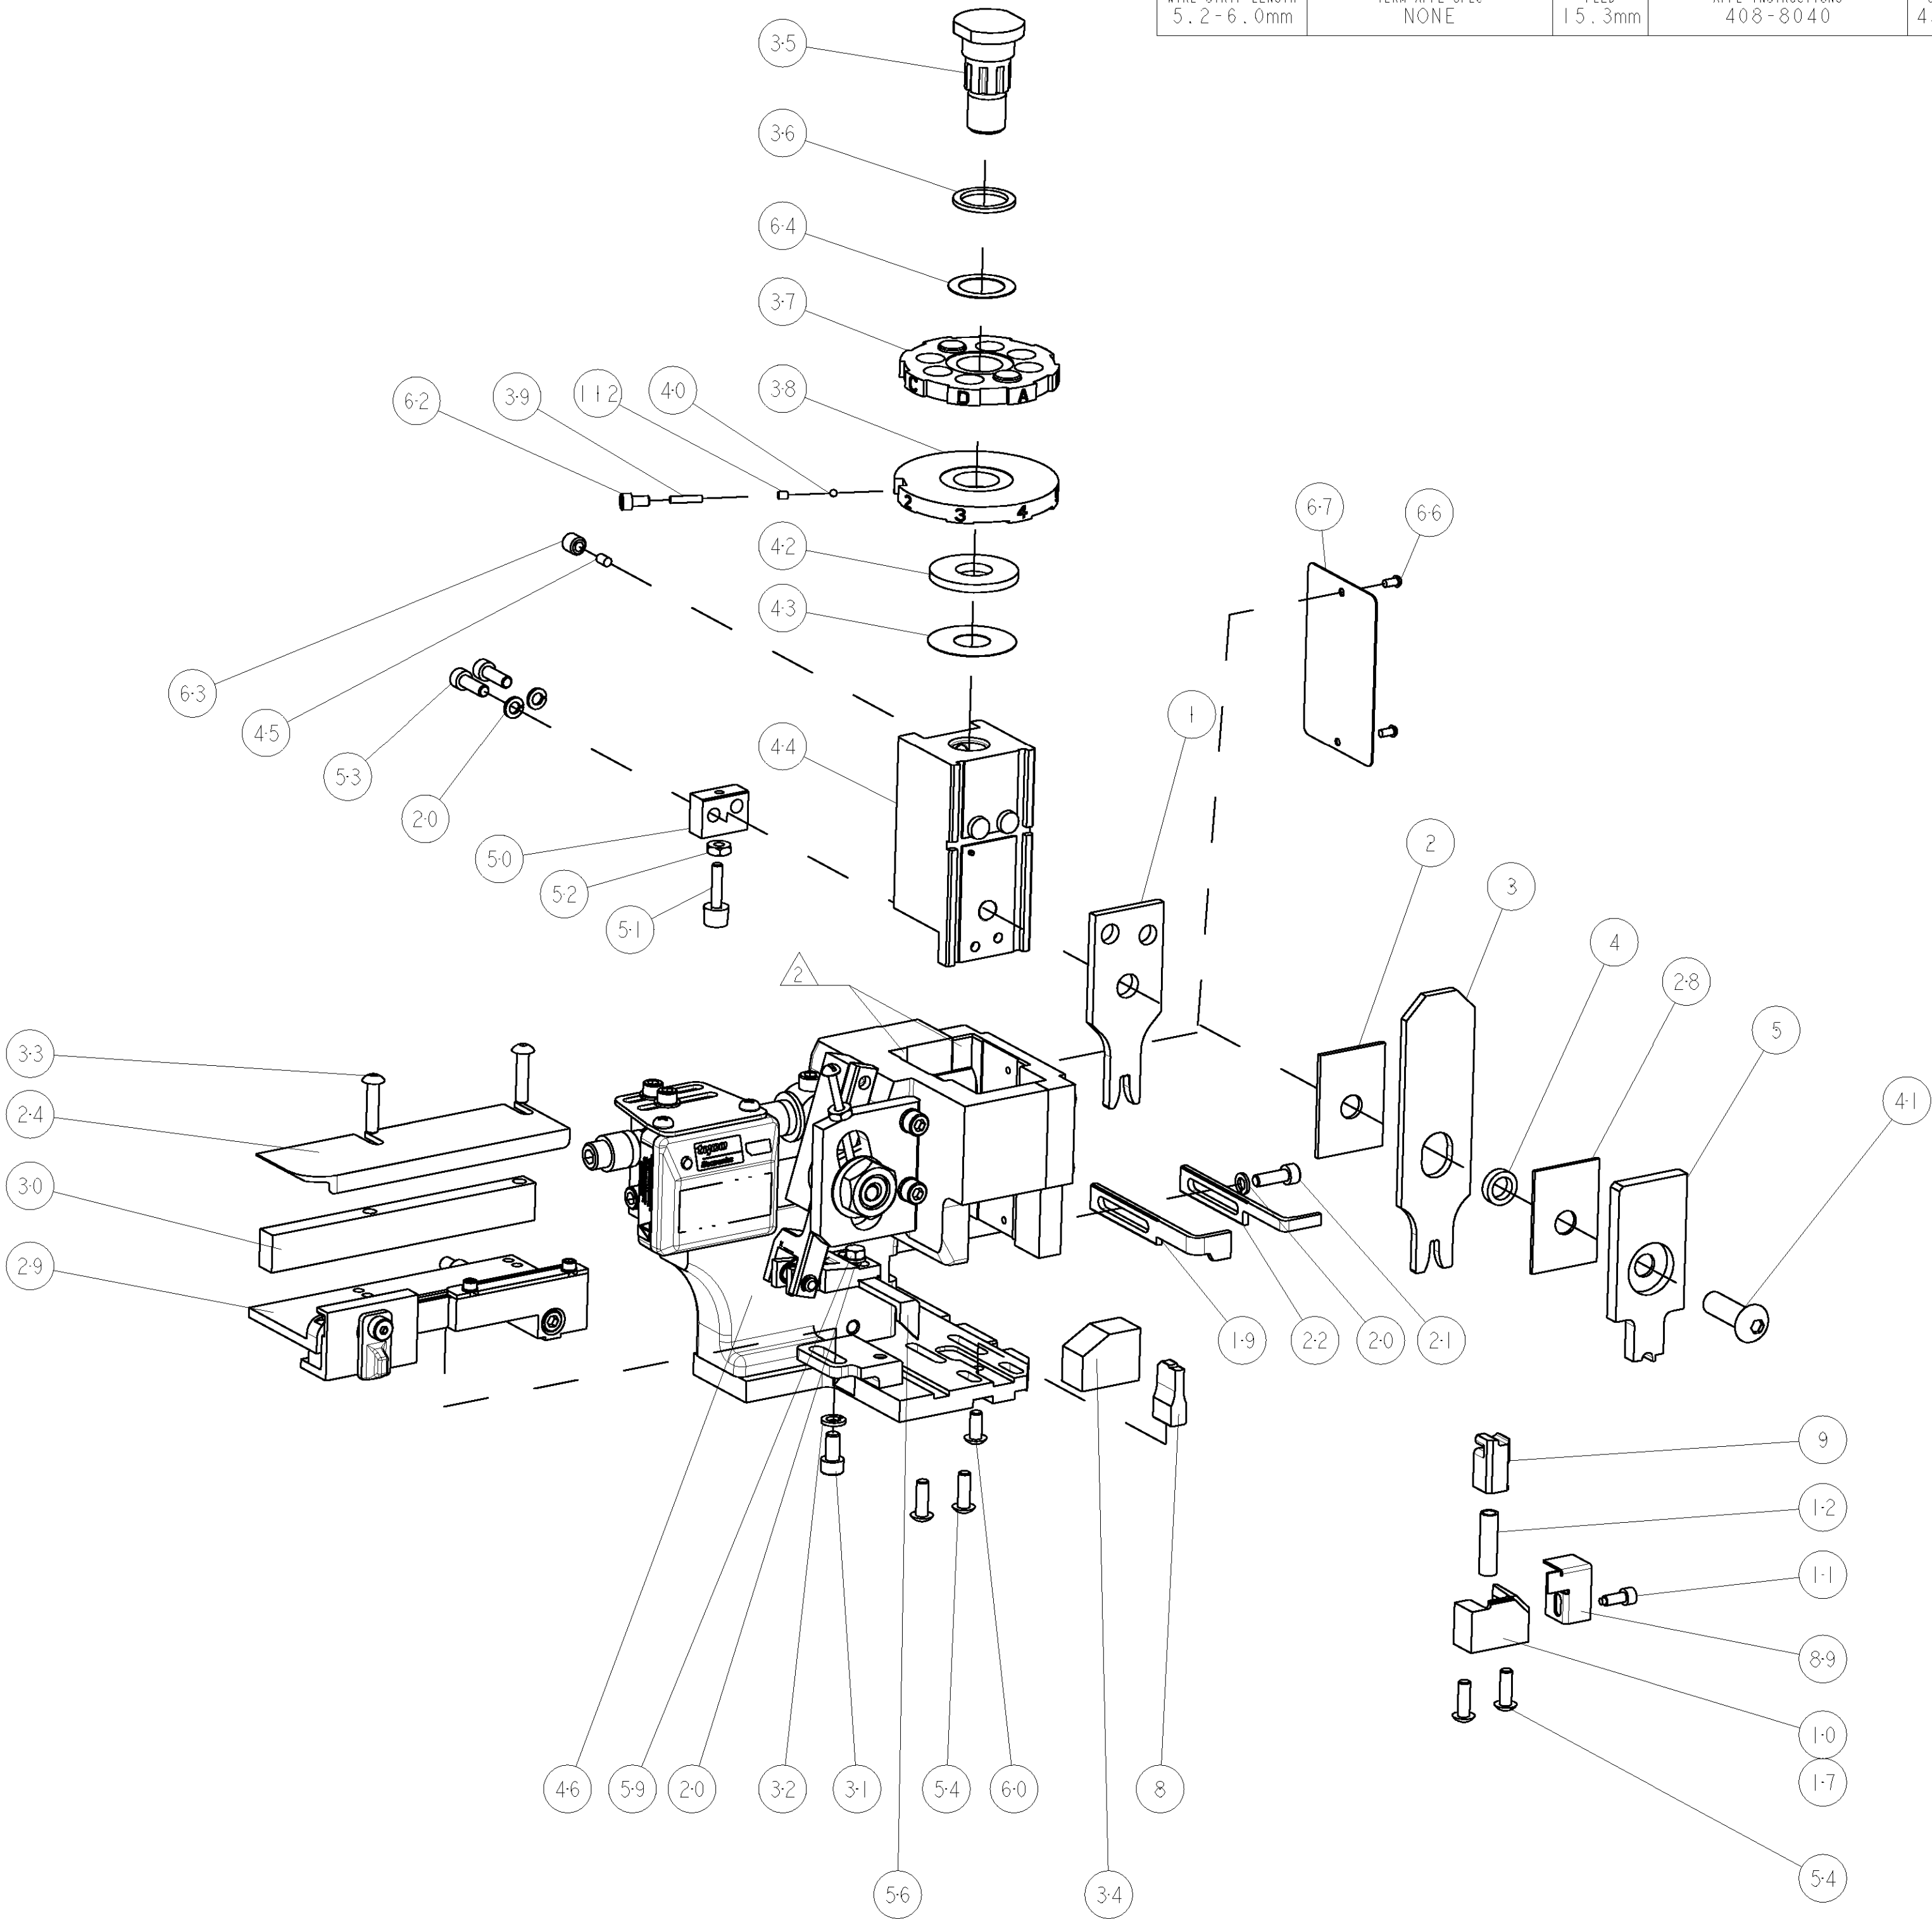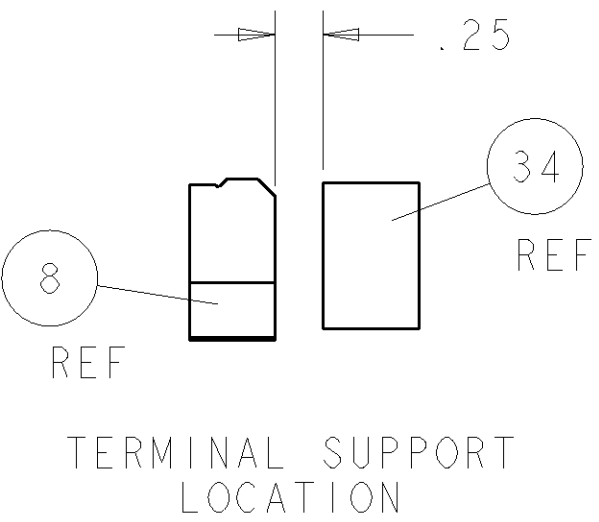

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852259-6](#)