

### THYRISTOR/ DIODE and THYRISTOR/ THYRISTOR

### ADD-A-pak™ GEN V Power Modules

#### Features

- High Voltage
- Industrial Standard Package
- Thick Al metal die and double stick bonding
- Thick copper baseplate
- UL E78996 approved
- 3500V<sub>RMS</sub> isolating voltage

#### Benefits

- Up to 1600V
- Full compatible TO-240AA
- High Surge capability
- Easy Mounting on heatsink
- Al<sub>2</sub>O<sub>3</sub> DBC insulator
- Heatsink grounded

75 A  
95 A

#### Mechanical Description

The Generation V of Add-A-pak module combine the excellent thermal performance obtained by the usage of Direct Bonded Copper substrate with superior mechanical ruggedness, thanks to the insertion of a solid Copper baseplate at the bottom side of the device. The Cu baseplate allow an easier mounting on the majority of heatsink with increased tolerance of surface roughness and improve thermal spread.

The Generation V of AAP module is manufactured without hard mold, eliminating in this way any possible direct stress on the leads.

The electrical terminals are secured against axial pull-out: they are fixed to the module housing via a click-stop feature already tested and proved as reliable on other IR modules.

#### Electrical Description

These modules are intended for general purpose high voltage applications such as high voltage regulated power supplies, lighting circuits, temperature and motor speed control circuits, UPS and battery charger.

#### Major Ratings and Characteristics

Parameters	IRK.71	IRK.91	Units
$I_{T(AV)}$ or $I_{F(AV)}$ @ 85°C	75	95	A
$I_{O(RMS)}$ (*)	165	210	A
$I_{TSM}$ @ 50Hz	1665	1785	A
$I_{FSM}$ @ 60Hz	1740	1870	A
$I^2t$ @ 50Hz	13.86	15.91	KA <sup>2</sup> s
@ 60Hz	12.56	14.52	KA <sup>2</sup> s
$I^2\sqrt{t}$	138.6	159.1	KA <sup>2</sup> √s
$V_{RRM}$ range	400 to 1600		V
$T_{STG}$	-40 to 125		°C
$T_J$	-40 to 125		°C

(\*) As AC switch.



# IRK.71, .91 Series


Bulletin I27132 rev. I 09/04

## ELECTRICAL SPECIFICATIONS

### Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage	$V_{RSM}$ , maximum non-repetitive peak reverse voltage	$V_{DRM}$ , max. repetitive peak off-state voltage, gate open circuit	$I_{RRM}$ $I_{DRM}$ 125°C mA
	-	V	V	V	
IRK.71/ .91	04	400	500	400	15
	06	600	700	600	
	08	800	900	800	
	10	1000	1100	1000	
	12	1200	1300	1200	
	14	1400	1500	1400	
	16	1600	1700	1600	

### On-state Conduction

Parameters	IRK.71	IRK.91	Units	Conditions	
$I_{T(AV)}$ Max. average on-state current (Thyristors)	75	95		180° conduction, half sine wave, $T_C = 85^\circ\text{C}$	
$I_{F(AV)}$ Max. average forward current (Diodes)					
$I_{O(RMS)}$ Max. continuous RMS on-state current. As AC switch	165	210	A		
$I_{TSM}$ Max. peak, one cycle or non-repetitive on-state	1665	1785	$\text{KA}^2\text{s}$	t=10ms No voltage reappplied t=8.3ms reappplied Sinusoidal half wave, Initial $T_J = T_J \text{ max.}$	
$I_{FSM}$ or forward current	1740	1870			t=10ms 100% $V_{RRM}$ reappplied
	1400	1500			t=8.3ms no voltage reappplied
	1470	1570			$T_J = 25^\circ\text{C}$ ,
	1850	2000			t=10ms
	1940	2100			t=8.3ms
$I^2t$ Max. $I^2t$ for fusing	13.86	15.91	$\text{KA}^2\text{s}$	t=10ms No voltage reappplied t=8.3ms reappplied Initial $T_J = T_J \text{ max.}$	
$I^2t$ Max. $I^2t$ for fusing	12.56	14.52	t=10ms 100% $V_{RRM}$ reappplied		
	9.80	11.25	t=8.3ms reappplied		
	8.96	10.27	$T_J = 25^\circ\text{C}$ ,		
	17.11	20.00	t=10ms		
	15.60	18.30	t=8.3ms		
$I^2/t$ Max. $I^2/t$ for fusing (1)	138.6	159.1	$\text{KA}^2/\text{s}$	t=0.1 to 10ms, no voltage reappplied, $T_J = T_J \text{ max}$	
$V_{T(TO)}$ Max. value of threshold voltage (2)	0.82	0.80	V	Low level (3)	
	0.85	0.85		High level (4)	
$r_t$ Max. value of on-state slope resistance (2)	3.00	2.40	$\text{m}\Omega$	Low level (3)	
	2.90	2.25		High level (4)	
$V_{TM}$ Max. peak on-state or forward voltage	1.59	1.58	V	$I_{TM} = \pi \times I_{T(AV)}$	
$V_{FM}$				$I_{FM} = \pi \times I_{F(AV)}$	
$di/dt$ Max. non-repetitive rate of rise of turned on current	150		A/ $\mu\text{s}$	$T_J = 25^\circ\text{C}$ , from 0.67 $V_{DRM}$ , $I_{TM} = \pi \times I_{T(AV)}$ , $I_g = 500\text{mA}$ , $t_r < 0.5 \mu\text{s}$ , $t_p > 6 \mu\text{s}$	
$I_H$ Max. holding current	250		mA	$T_J = 25^\circ\text{C}$ , anode supply = 6V, resistive load, gate open circuit	
$I_L$ Max. latching current	400			$T_J = 25^\circ\text{C}$ , anode supply = 6V, resistive load	

(1)  $I^2t$  for time  $t_x = I^2t \times \sqrt{t_x}$  (2) Average power =  $V_{T(TO)} \times I_{T(AV)} + r_t \times (I_{T(RMS)})^2$  (3)  $16.7\% \times \pi \times I_{AV} < I < \pi \times I_{AV}$   
 (4)  $I > \pi \times I_{AV}$

**Triggering**

Parameters	IRK.71	IRK.91	Units	Conditions	
$P_{GM}$ Max. peak gate power	12	12	W		
$P_{G(AV)}$ Max. average gate power	3.0	3.0			
$I_{GM}$ Max. peak gate current	3.0	3.0	A		
$-V_{GM}$ Max. peak negative gate voltage	10		V	Anode supply = 6V resistive load	
$V_{GT}$ Max. gate voltage required to trigger	4.0				$T_J = -40^\circ\text{C}$
	2.5				$T_J = 25^\circ\text{C}$
	1.7		$T_J = 125^\circ\text{C}$		
$I_{GT}$ Max. gate current required to trigger	270		mA	Anode supply = 6V resistive load	
	150				$T_J = -40^\circ\text{C}$
	80				$T_J = 125^\circ\text{C}$
$V_{GD}$ Max. gate voltage that will not trigger	0.25		V	$T_J = 125^\circ\text{C}$ , rated $V_{DRM}$ applied	
$I_{GD}$ Max. gate current that will not trigger	6		mA	$T_J = 125^\circ\text{C}$ , rated $V_{DRM}$ applied	

**Blocking**

Parameters	IRK.71	IRK.91	Units	Conditions
$I_{RRM}$ Max. peak reverse and off-state leakage current at $V_{RRM}, V_{DRM}$	15		mA	$T_J = 125^\circ\text{C}$ , gate open circuit
$V_{INS}$ RMS isolation voltage	2500 (1 min)		V	50 Hz, circuit to base, all terminals shorted
	3500 (1 sec)			
$dv/dt$ Max. critical rate of rise of off-state voltage (5)	500		V/ $\mu\text{s}$	$T_J = 125^\circ\text{C}$ , linear to $0.67 V_{DRM}$ , gate open circuit

(5) Available with  $dv/dt = 1000\text{V}/\mu\text{s}$ , to complete code add S90 i.e. IRKT91/16AS90.

**Thermal and Mechanical Specifications**

Parameters	IRK.71	IRK.91	Units	Conditions
$T_J$ Junction operating temperature range	- 40 to 125		$^\circ\text{C}$	
$T_{stg}$ Storage temp. range	- 40 to 125			
$R_{thJC}$ Max. internal thermal resistance, junction to case	0.165	0.135	K/W	Per module, DC operation
$R_{thCS}$ Typical thermal resistance case to heatsink	0.1			Mounting surface flat, smooth and greased
T Mounting torque $\pm 10\%$ to heatsink busbar	5		Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound
	3			
wt Approximate weight	110 (4)		gr (oz)	
Case style	TO-240AA		JEDEC	

**$\Delta R$  Conduction (per Junction)**

(The following table shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC)

Devices	Sine half wave conduction					Rect. wave conduction					Units
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
IRK.71	0.06	0.07	0.09	0.12	0.18	0.04	0.08	0.10	0.13	0.18	$^\circ\text{C}/\text{W}$
IRK.91	0.04	0.05	0.06	0.08	0.12	0.03	0.05	0.06	0.08	0.12	

# IRK.71, .91 Series

Bulletin I27132 rev. I 09/04

## Ordering Information Table



<b>Device Code</b>					
<b>IRK</b>	<b>T</b>	<b>91</b>	<b>/</b>	<b>16</b>	<b>A S90</b>
①	②	③		④	⑤ ⑥

<p><b>1</b> - Module type</p> <p><b>2</b> - Circuit configuration (See Circuit Configuration table below)</p> <p><b>3</b> - Current code **</p> <p><b>4</b> - Voltage code (See Voltage Ratings table)</p> <p><b>5</b> - A : Gen V</p> <p><b>6</b> - dv/dt code: S90 = dv/dt 1000 V/μs No letter = dv/dt 500 Vμs</p>	<p>** Available with no auxiliary cathode.</p> <p>To specify change: 71 to 72 91 to 92</p> <p>e.g. : IRKT92/16A etc.</p>
--	--

IRK.92 types  
With no auxiliary cathode

## Outline Table

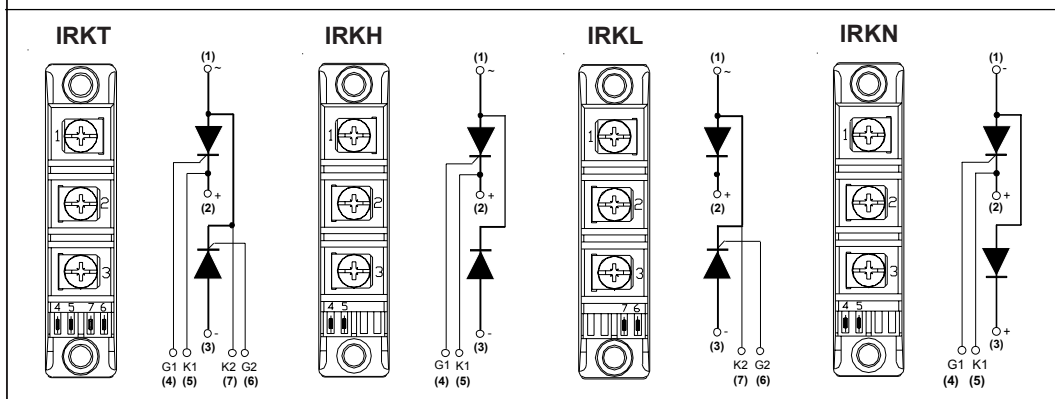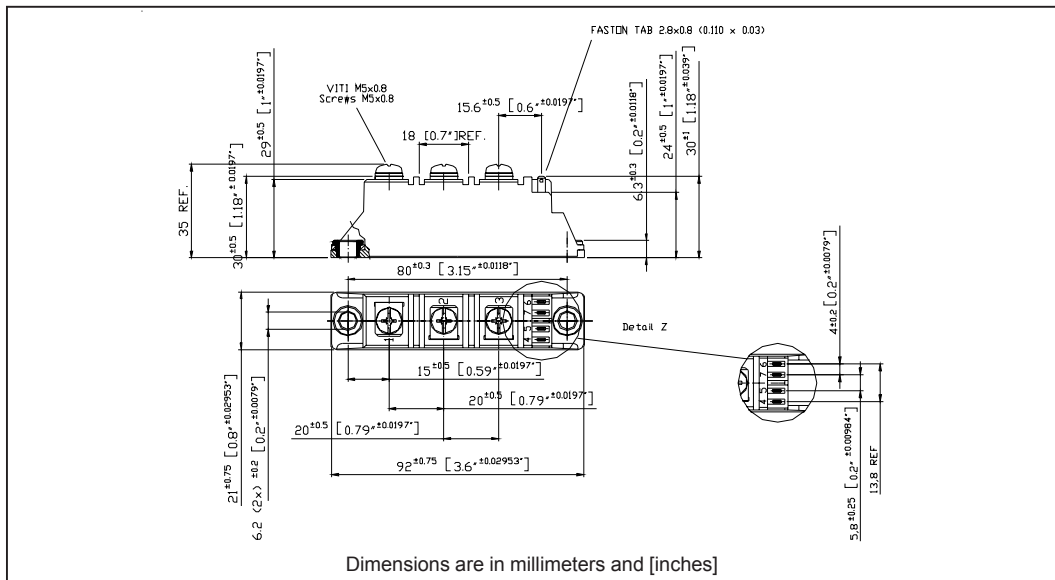

**NOTE: To order the Optional Hardware see Bulletin I27900**

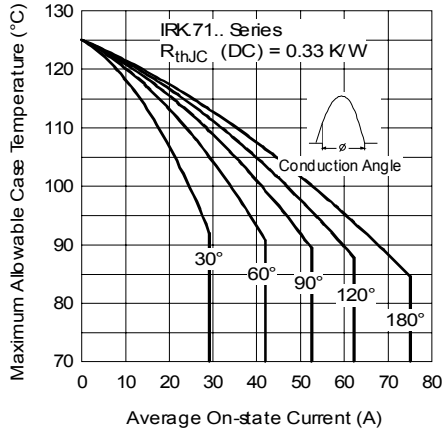


Fig. 1 - Current Ratings Characteristics

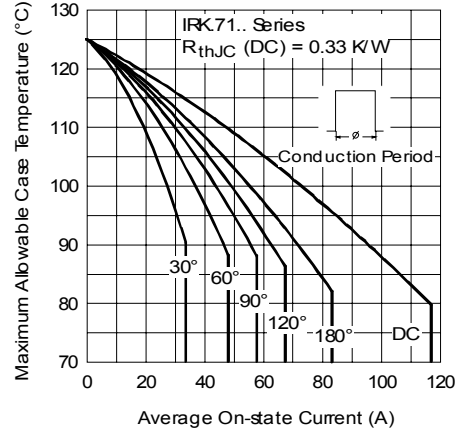


Fig. 2 - Current Ratings Characteristics

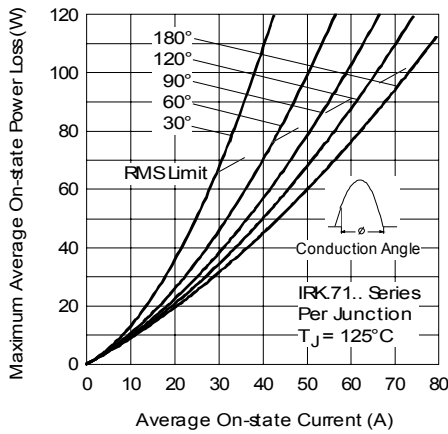


Fig. 3 - On-state Power Loss Characteristics

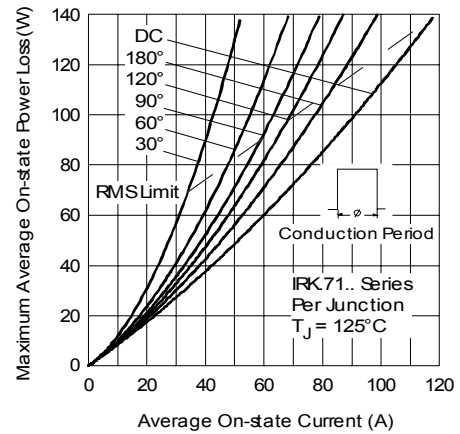


Fig. 4 - On-state Power Loss Characteristics

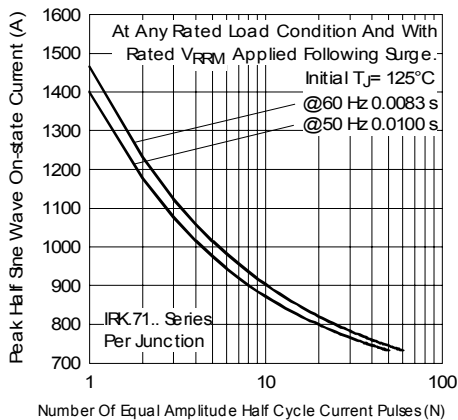


Fig. 5 - Maximum Non-Repetitive Surge Current

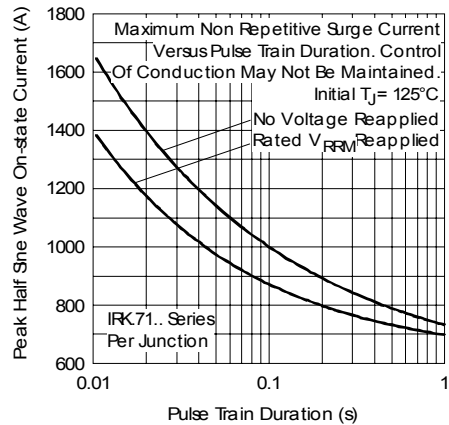


Fig. 6 - Maximum Non-Repetitive Surge Current

# IRK.71, .91 Series

Bulletin I27132 rev. I 09/04

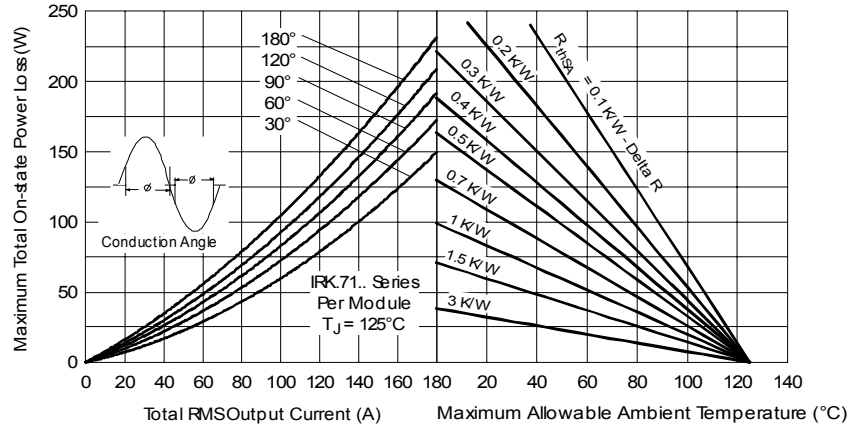


Fig. 7 - On-state Power Loss Characteristics

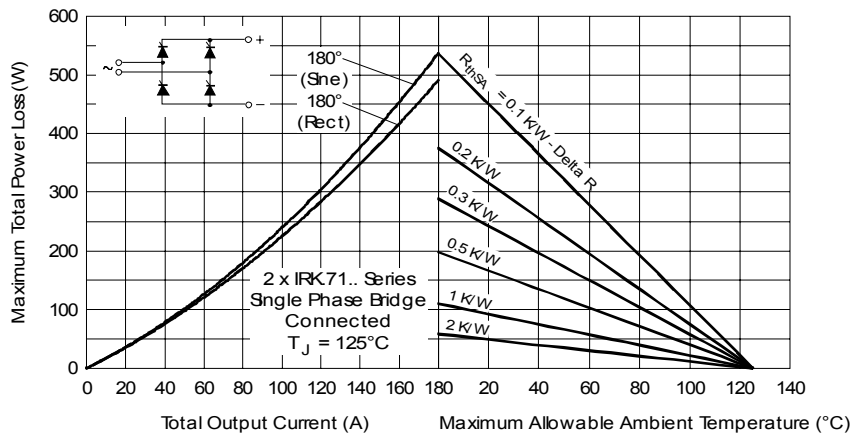


Fig. 8 - On-state Power Loss Characteristics

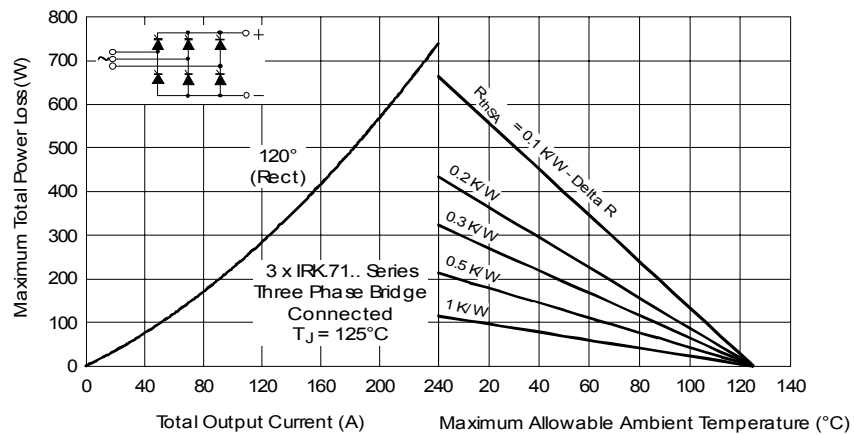


Fig. 9 - On-state Power Loss Characteristics

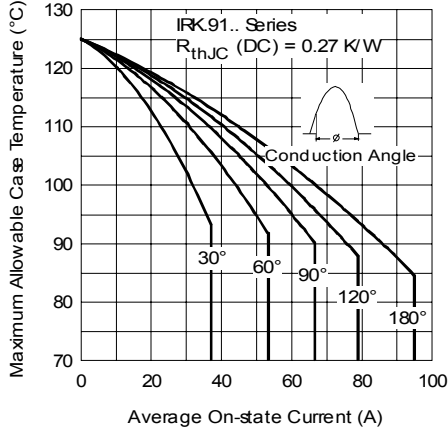


Fig. 10 - Current Ratings Characteristics

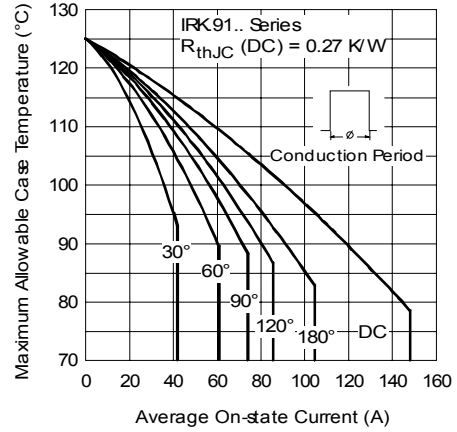


Fig. 11 - Current Ratings Characteristics

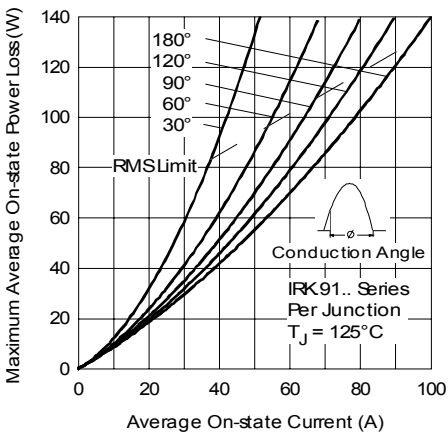


Fig. 12 - On-state Power Loss Characteristics

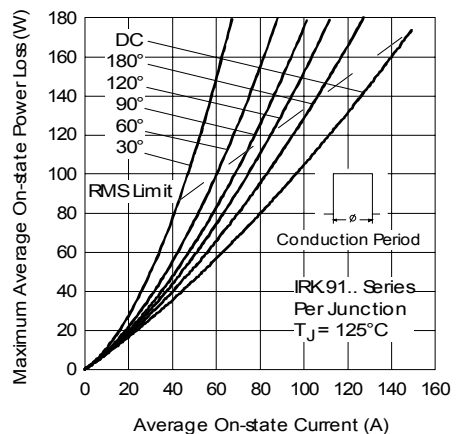


Fig. 13 - On-state Power Loss Characteristics

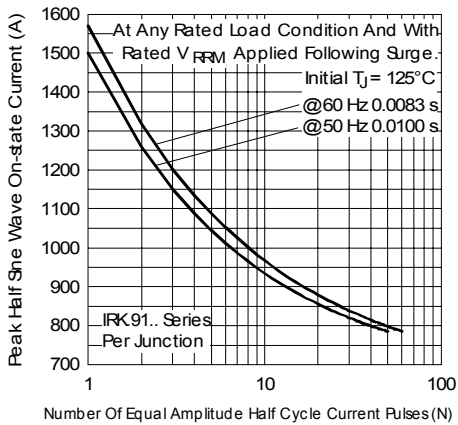


Fig. 14 - Maximum Non-Repetitive Surge Current

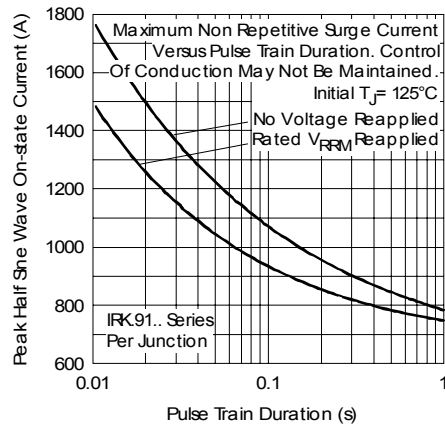


Fig. 15 - Maximum Non-Repetitive Surge Current

# IRK.71, .91 Series

Bulletin I27132 rev. I 09/04

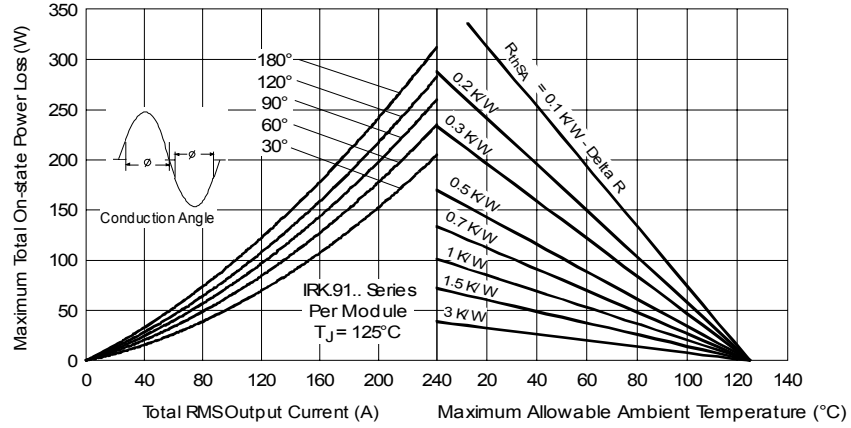


Fig. 16 - On-state Power Loss Characteristics

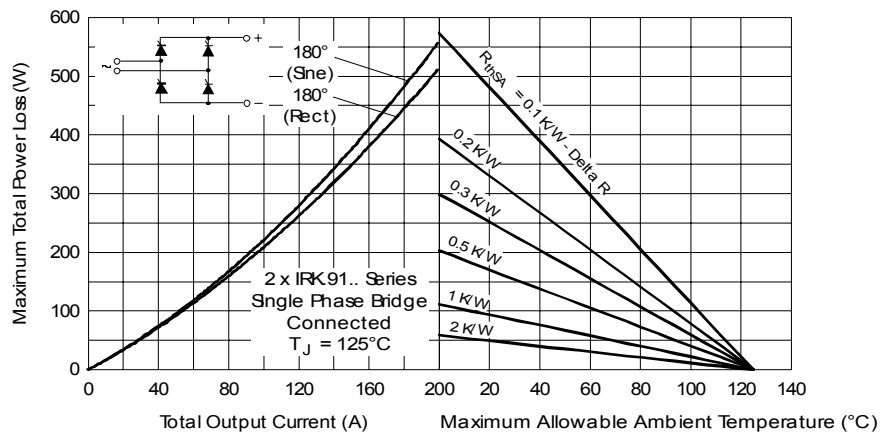


Fig. 17 - On-state Power Loss Characteristics

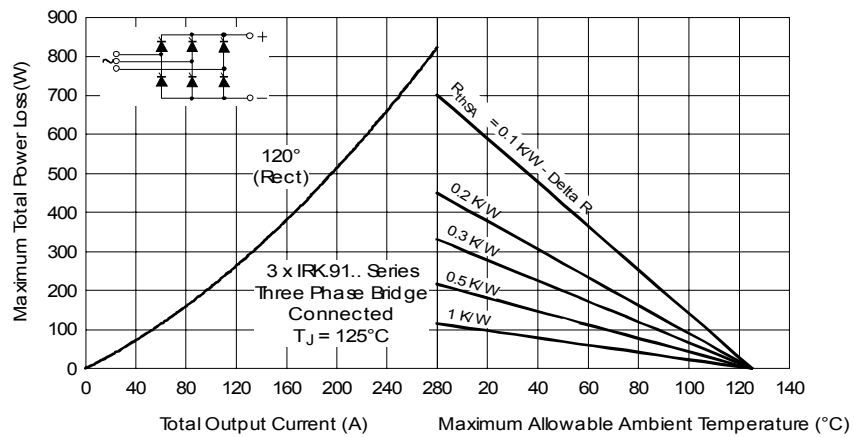


Fig. 18 - On-state Power Loss Characteristics



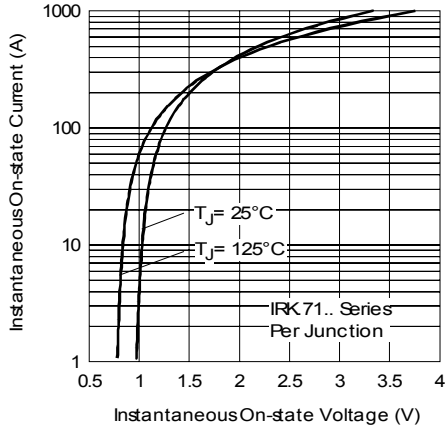


Fig. 19 - On-state Voltage Drop Characteristics

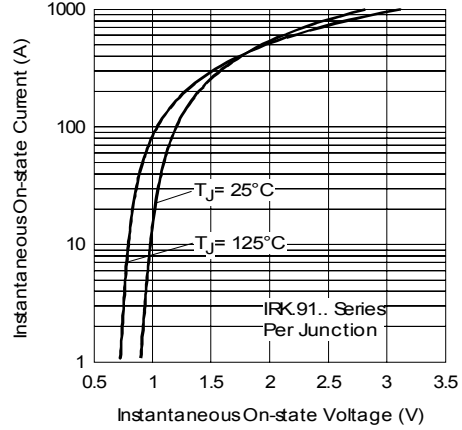


Fig. 20 - On-state Voltage Drop Characteristics

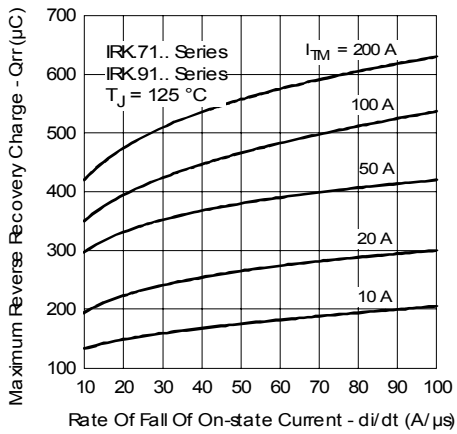


Fig. 21 - Recovery Charge Characteristics

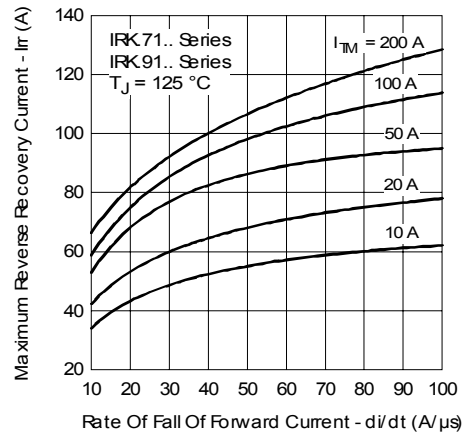


Fig. 22 - Recovery Current Characteristics

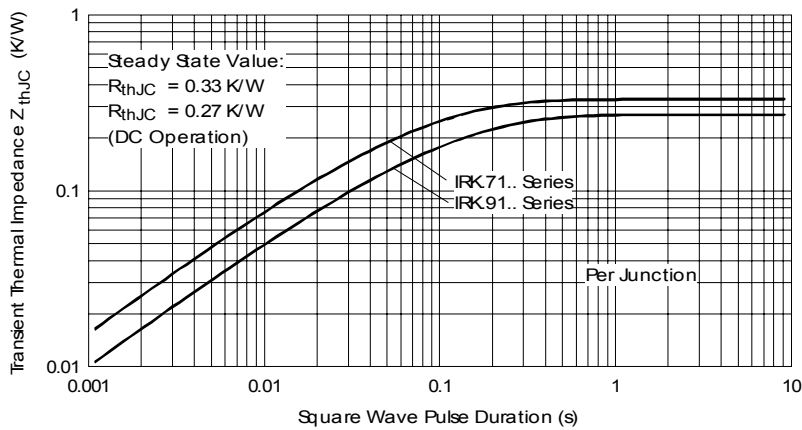


Fig. 23 - Thermal Impedance  $Z_{thJC}$  Characteristics

# IRK.71, .91 Series

Bulletin I27132 rev. I 09/04

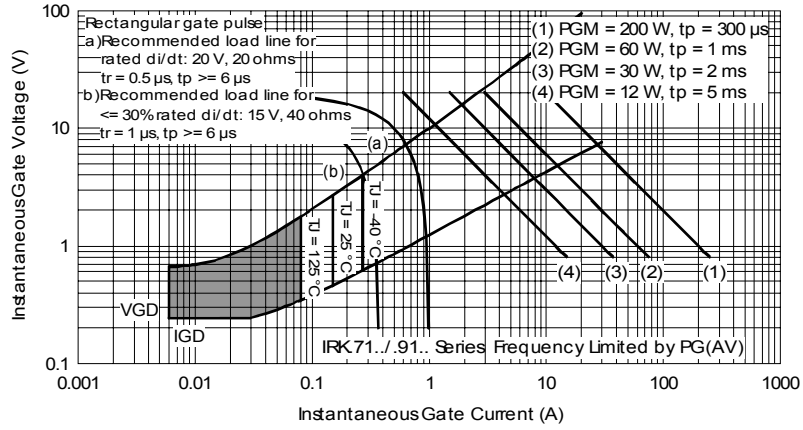


Fig. 24 - Gate Characteristics

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.



## Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Vishay:

[IRKH71/04P](#) [IRKH71/06P](#) [IRKH71/08P](#) [IRKH71/08S90P](#) [IRKH71/10P](#) [IRKH71/12P](#) [IRKH71/12S90P](#) [IRKH71/16P](#)  
[IRKH71/16S90P](#) [IRKH72/06P](#) [IRKH72/10P](#) [IRKH91/04P](#) [IRKH91/06P](#) [IRKH91/06S90P](#) [IRKH91/08P](#) [IRKH91/10P](#)  
[IRKH91/10S90P](#) [IRKH91/12P](#) [IRKH91/12S90P](#) [IRKH91/14P](#) [IRKH91/14S90P](#) [IRKH91/16P](#) [IRKH91/16S90P](#)  
[IRKH92/10P](#) [IRKH92/12P](#) [IRKH92/12S90P](#) [IRKH92/14P](#) [IRKL71/04P](#) [IRKL71/06P](#) [IRKL71/08P](#) [IRKL71/10P](#)  
[IRKL71/12P](#) [IRKL71/12S90P](#) [IRKL71/16P](#) [IRKL72/08P](#) [IRKL91/04P](#) [IRKL91/06P](#) [IRKL91/06S90P](#) [IRKL91/08P](#)  
[IRKL91/10P](#) [IRKL91/12P](#) [IRKL91/12S90P](#) [IRKL91/14P](#) [IRKL91/14S90P](#) [IRKL91/16AS90](#) [IRKL91/16P](#)  
[IRKL91/16S90P](#) [IRKL92/12P](#) [IRKL92/12S90P](#) [IRKL92/16P](#) [IRKN91/12P](#) [IRKN91/16P](#) [IRKT71/04P](#) [IRKT71/06P](#)  
[IRKT71/08P](#) [IRKT71/08S90P](#) [IRKT71/10P](#) [IRKT71/12P](#) [IRKT71/12S90P](#) [IRKT71/14P](#) [IRKT71/14S90P](#) [IRKT71/16P](#)  
[IRKT71/16S90P](#) [IRKT72/12P](#) [IRKT91/04P](#) [IRKT91/06P](#) [IRKT91/06S90P](#) [IRKT91/08P](#) [IRKT91/08S90P](#)  
[IRKT91/10P](#) [IRKT91/12P](#) [IRKT91/12S90P](#) [IRKT91/14P](#) [IRKT91/14S90P](#) [IRKT91/16P](#) [IRKT91/16S90P](#) [IRKT92/04P](#)  
[IRKT92/06P](#) [IRKT92/08P](#) [IRKT92/10P](#) [IRKT92/12P](#) [IRKT92/12S90P](#) [IRKT92/14P](#) [IRKT92/14S90P](#) [IRKT92/16P](#)  
[IRKT92/16S90P](#)