
# **Optocoupler, Phototransistor Output, With Base Connection**



### LINKS TO ADDITIONAL RESOURCES



### DESCRIPTION

The IL2 is an optically coupled isolated pairs employing GaAs infrared LEDs and silicon NPN phototransistor. Signal information, including a DC level, can be transmitted by the drive while maintaining a high degree of electrical isolation between input and output. The IL2 is especially designed for driving medium-speed logic and can be used to eliminate troublesome ground loop and noise problems. This coupler can be used also to replace relays and transformers in many digital interface applications such as CRT modulation.

## FEATURES

- Current transfer ratio (see order information)
- Isolation test voltage 4420 V<sub>RMS</sub>
- Material categorization: for definitions of compliance please see <u>www.vishav.com/doc?99912</u>

### AGENCY APPROVALS

- <u>UL</u> / <u>cUL</u> 1577
- <u>CSA</u>
- CQC GB4943.1-2011
- CQC GB8898-2011
- <u>FIMKO</u>

ORDERING INFORMATION	
I  L  2  -    PART NUMBER	X     0     0     9     T     Option 9       PACKAGE OPTION     PACKAGE OPTION     0.1 mm
AGENCY CERTIFIED / PACKAGE	CTR (%)
UL, cUL, CSA, CQC, FIMKO	> 100
SMD-6, option 9	IL2-X009T

Note

Additional options may be possible, please contact sales office

ABSOLUTE MAXIMUM RATINGS (T <sub>amb</sub> = 25 °C, unless otherwise specified)									
PARAMETER TEST CONDITION SYMBOL VALUE UNIT									
INPUT									
Reverse voltage		V <sub>R</sub>	6	V					
Forward current		١ <sub>F</sub>	60	mA					
Surge current		I <sub>FSM</sub>	2.5	A					
Power dissipation		P <sub>diss</sub>	100	mW					
Derate linearly from 25 °C			1.33	mW/°C					



RoHS

COMPLIANT

IL2



## Vishay Semiconductors

<b>ABSOLUTE MAXIMUM RATINGS</b> (T <sub>amb</sub> = 25 °C, unless otherwise specified)								
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT				
OUTPUT								
Collector emitter breakdown voltage		BV <sub>CEO</sub>	70	V				
Emitter base breakdown voltage		BV <sub>EBO</sub>	7	V				
Collector base breakdown voltage		BV <sub>CBO</sub>	70	V				
Collector current		Ι <sub>C</sub>	50	mA				
Collector current	t < 1.0 ms	Ι <sub>C</sub>	400	mA				
Power dissipation		P <sub>diss</sub>	200	mW				
Derate linearly from 25 °C			2.6	mW/°C				
COUPLER								
Package power dissipation		P <sub>tot</sub>	250	mW				
Derate linearly from 25 °C			3.3	mW/°C				
Storage temperature		T <sub>stg</sub>	-40 to +150	°C				
Operating temperature		T <sub>amb</sub>	-40 to +100	°C				
Junction temperature		Тj	125	°C				
Soldering temperature <sup>(1)</sup>	2.0 mm from case bottom	T <sub>sld</sub>	260	°C				

Notes

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not
implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute
maximum ratings for extended periods of the time can adversely affect reliability

<sup>(1)</sup> Refer to reflow profile for soldering conditions for surface mounted devices (SMD). Refer to wave profile for soldering conditions for through hole devices (DIP)

PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
INPUT						
Forward voltage	I <sub>F</sub> = 60 mA	V <sub>F</sub>	-	1.25	1.65	V
Breakdown voltage	I <sub>R</sub> = 10 μA	V <sub>BR</sub>	6	30	-	V
Reverse current	V <sub>R</sub> = 6.0 V	I <sub>R</sub>	-	0.01	10	μA
Capacitance	V <sub>R</sub> = 0 V, f = 1.0 MHz	Co	-	40	-	pF
Thermal resistance junction to lead		R <sub>thjl</sub>	-	750	-	K/W
OUTPUT				•		
Collector emitter capacitance	V <sub>CE</sub> = 5.0 V, f = 1.0 MHz	C <sub>CE</sub>	-	6.8	-	pF
Collector base capacitance	V <sub>CB</sub> = 5.0 V, f = 1.0 MHz	C <sub>CB</sub>	-	8.5	-	pF
Emitter base capacitance	V <sub>EB</sub> = 5.0 V, f = 1.0 MHz	C <sub>EB</sub>	-	11	-	pF
Collector emitter leakage voltage	V <sub>CE</sub> = 10 V	I <sub>CEO</sub>	-	5	50	nA
Collector emitter saturation voltage	I <sub>CE</sub> = 1.0 mA, I <sub>B</sub> = 20 μA	V <sub>CEsat</sub>	-	0.25	-	V
Base emitter voltage	$V_{CE} = 10 \text{ V}, \text{ I}_{B} = 20 \mu\text{A}$	VBE	-	0.65	-	V
DC forward current gain	$V_{CE} = 10 \text{ V}, \text{ I}_{B} = 20 \mu\text{A}$	h <sub>FE</sub>	200	650	1800	
DC forward current gain saturated	$V_{CE} = 0.4 \text{ V}, I_B = 20 \ \mu\text{A}$	h <sub>FEsat</sub>	120	400	600	
Thermal resistance junction to lead		R <sub>thjl</sub>	-	500	-	K/W
COUPLER						
Capacitance (input to output)	V <sub>I-O</sub> = 0 V, f = 1.0 MHz	C <sub>IO</sub>	-	0.6	-	pF
Insulation resistance	V <sub>I-O</sub> = 500 V	R <sub>S</sub>	-	10 <sup>14</sup>	-	Ω

Note

• Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluation. Typical values are for information only and are not part of the testing requirements

2

/ISHAY<sub>@</sub>

IL2

CURRENT TRANSFER RATIO							
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT	
Current transfer ratio (collector emitter saturated)	$I_F = 10 \text{ mA}, V_{CE} = 0.4 \text{ V}$	CTR <sub>CEsat</sub>	-	170	-	%	
Current transfer ratio (collector emitter)	$I_{F} = 10 \text{ mA}, V_{CE} = 10 \text{ V}$	CTR <sub>CE</sub>	100	200	500	%	
Current transfer ratio (collector base)	$I_{F} = 10 \text{ mA}, V_{CB} = 9.3 \text{ V}$	CTR <sub>CB</sub>	-	0.25	-	%	

SWITCHING CHARACTERISTICS						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
NON-SATURATED						
Current time	$V_{CE}$ = 5 V, $R_L$ = 75 $\Omega$ , t <sub>P</sub> measured at 50 % of output	١ <sub>F</sub>	-	4	-	mA
Delay time	$V_{CE}$ = 5 V, $R_L$ = 75 $\Omega$ , t <sub>P</sub> measured at 50 % of output	t <sub>D</sub>	-	1.7	-	μs
Rise time	$V_{CE} = 5 \text{ V}, \text{ R}_{L} = 75 \Omega,$ t <sub>P</sub> measured at 50 % of output	t <sub>r</sub>	-	2.6	-	μs
Storage time	$V_{CE}$ = 5 V, $R_L$ = 75 $\Omega$ , t <sub>P</sub> measured at 50 % of output	t <sub>s</sub>	-	0.4	-	μs
Fall time	$V_{CE}$ = 5 V, $R_L$ = 75 $\Omega$ , t <sub>P</sub> measured at 50 % of output	t <sub>f</sub>	-	2.2	-	μs
Propagation H to L	$V_{CE}$ = 5 V, $R_L$ = 75 $\Omega$ , t <sub>P</sub> measured at 50 % of output	t <sub>PHL</sub>	-	1.2	-	μs
Propagation L to H	$V_{CE}$ = 5 V, $R_L$ = 75 $\Omega$ , t <sub>P</sub> measured at 50 % of output	t <sub>PLH</sub>	-	2.3	-	μs
SATURATED						
Current time	$\label{eq:V_CE} \begin{array}{l} {\sf V}_{CE} = 0.4 \; {\sf V}, \; {\sf R}_{L} = 1.0 \; {\sf k}\Omega, \\ {\sf V}_{CL} = 5 \; {\sf V}, \; {\sf V}_{TH} = 1.5 \; {\sf V} \end{array}$	١ <sub>F</sub>	-	5	-	mA
Delay time	$\label{eq:V_CE} \begin{array}{l} {\sf V}_{CE} = 0.4 \; {\sf V}, \; {\sf R}_{L} = 1.0 \; {\sf k}\Omega, \\ {\sf V}_{CL} = 5 \; {\sf V}, \; {\sf V}_{TH} = 1.5 \; {\sf V} \end{array}$	t <sub>D</sub>	-	1	-	μs
Rise time	$\label{eq:V_CE} \begin{array}{l} {\sf V}_{CE} = 0.4 \; {\sf V}, \; {\sf R}_{L} = 1.0 \; {\sf k}\Omega, \\ {\sf V}_{CL} = 5 \; {\sf V}, \; {\sf V}_{TH} = 1.5 \; {\sf V} \end{array}$	t <sub>r</sub>	-	2	-	μs
Storage time	$\label{eq:V_CE} \begin{array}{l} {\sf V}_{CE} = 0.4 \; {\sf V}, \; {\sf R}_{L} = 1.0 \; {\sf k}\Omega, \\ {\sf V}_{CL} = 5 \; {\sf V}, \; {\sf V}_{TH} = 1.5 \; {\sf V} \end{array}$	t <sub>S</sub>	-	5.4	-	μs
SATURATED						
Fall time	$\label{eq:V_CE} \begin{array}{l} {\sf V}_{CE} = 0.4 \; {\sf V}, \; {\sf R}_{L} = 1.0 \; {\sf k}\Omega, \\ {\sf V}_{CL} = 5 \; {\sf V}, \; {\sf V}_{TH} = 1.5 \; {\sf V} \end{array}$	t <sub>f</sub>	-	13.5	-	μs
Propagation H to L	$\label{eq:V_CE} \begin{array}{l} {\sf V}_{CE} = 0.4 \; {\sf V}, \; {\sf R}_{L} = 1.0 \; {\sf k}\Omega, \\ {\sf V}_{CL} = 5 \; {\sf V}, \; {\sf V}_{TH} = 1.5 \; {\sf V} \end{array}$	t <sub>PHL</sub>	-	5.4	-	μs
Propagation L to H	$\begin{array}{l} {\sf V}_{{\sf CE}} = 0.4 \; {\sf V},  {\sf R}_{{\sf L}} = 1.0 \; {\sf k}\Omega, \\ {\sf V}_{{\sf CL}} = 5 \; {\sf V},  {\sf V}_{{\sf TH}} = 1.5 \; {\sf V} \end{array}$	t <sub>PLH</sub>	-	7.4	-	μs

COMMON MODE TRANSIENT IMMUNITY							
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT	
Common mode rejection output high	$V_{CM} = 50  V_{P\text{-}P},  \text{R}_{L} = 1  \text{k}\Omega,  \text{I}_{\text{F}} = 10  \text{mA}$	CM <sub>H</sub>	-	5000	-	V/µs	
Common mode rejection output low	$V_{CM} = 50  V_{P\text{-}P},  \text{R}_{L} = 1  \text{k}\Omega,  \text{I}_{\text{F}} = 10  \text{mA}$	CM <sub>L</sub>	-	5000	-	V/µs	
Common mode coupling capacitance		C <sub>CM</sub>	-	0.01	-	pF	

Rev. 1.7, 15-Apr-2021

3

Document Number: 83612

# Vishay Semiconductors

SAFETY AND INSULATION RATINGS				
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Climatic classification	According to IEC 68 part 1		40 / 100 / 21	
Comparative tracking index		CTI	175	
Maximum rated withstanding isolation voltage	t = 1 min	V <sub>ISO</sub>	4420	V <sub>RMS</sub>
Maximum transient isolation voltage		VIOTM	10 000	V <sub>peak</sub>
Maximum repetitive peak isolation voltage		V <sub>IORM</sub>	890	V <sub>peak</sub>
Isolation resistance	$V_{IO} = 500 \text{ V}, \text{ T}_{amb} = 25 ^{\circ}\text{C}$	R <sub>IO</sub>	≥ 10 <sup>12</sup>	Ω
Isolation resistance	$V_{IO} = 500 \text{ V}, \text{ T}_{amb} = 100 ^{\circ}\text{C}$	R <sub>IO</sub>	≥ 10 <sup>11</sup>	Ω
Output safety power		P <sub>SO</sub>	400	mW
Input safety current		I <sub>SI</sub>	275	mA
Safety temperature		Τ <sub>S</sub>	175	°C
Creepage distance			≥ 7	mm
Clearance distance			≥ 7	mm
Insulation thickness		DTI	≥ 0.4	mm

Note


SHA)

• As per IEC 60747-5-5, § 7.4.3.8.2, this optocoupler is suitable for "safe electrical insulation" only within the safety ratings. Compliance with the safety ratings shall be ensured by means of protective circuits






## TYPICAL CHARACTERISTICS (T<sub>amb</sub> = 25 °C, unless otherwise specified)



#### Fig. 1 - Non-Saturated Switching Schematic



iil1\_02

#### Fig. 2 - Saturated Switching Schematic





Fig. 3 - Non-Saturated Switching Timing



iil1\_04

Fig. 4 - Saturated Switching Timing




Fig. 5 - Forward Voltage vs. Forward Current




Fig. 6 - Normalized Non-Saturated and Saturated CTR vs. LED Current


Rev. 1.7, 15-Apr-2021

5

Document Number: 83612

For technical questions, contact: <u>optocoupler.answers@vishay.com</u> THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>

# **Vishay Semiconductors**



www.vishay.com

Fig. 7 - Normalized Non-Saturated and Saturated CTR vs. LED Current




Fig. 8 - Normalized Non-Saturated and Saturated CTR vs. LED Current




Fig. 9 - Normalized Non-Saturated and Saturated CTR,  $T_{amb}$  = 100  $^\circ C$  vs. LED Current




Fig. 10 - Collector Emitter Current vs. Temperature and LED Current




Fig. 11 - Collector Emitter Leakage Current vs.Temperature




Fig. 12 - Normalized  $\text{CTR}_{cb}$  vs. LED Current and Temperature

For technical questions, contact: <u>optocoupler.answers@vishay.com</u> THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>

# Vishay Semiconductors






Fig. 13 - Collector Base Photocurrent vs. LED Current




Fig. 14 - Normalized Photocurrent vs.  $I_{\text{F}}$  and Temperature




Fig. 15 - Normalized Non-Saturated  $h_{\mbox{\scriptsize FE}}$  vs. Base Current and Temperature




Fig. 16 - Normalized Saturated h<sub>FE</sub> vs. Base Current and Temperature





Fig. 17 - Propagation Delay vs. Collector Load Resistor

For technical questions, contact: <u>optocoupler.answers@vishay.com</u> THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>

Vishay Semiconductors

### **PACKAGE DIMENSIONS** in millimeters

VISHAY

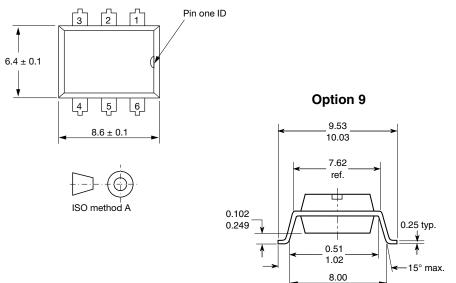

min.



Vishay

# Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay: IL2-X009T