



### Features:

- 758-896 MHz
- FirstNet Band 14 compliant
- Omnidirectional antenna
- Polarization: Vertical
- Gain: 2 dBi
- Antenna length: 170 mm.
- Cable length: 14 ft.

### Applications:

- Vehicular glass mount
- Public safety
- First responders
- RoHS compliant

All dimensions are in mm / inches

Issue: 1744

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters  
12220 World Trade Drive  
San Diego, CA 92128  
USA  
Tel: 1-858-674-8100

Pulse/Larsen Antennas  
18110 SE 34<sup>th</sup> St Bldg 2 Suite 250  
Vancouver, WA 98683  
USA  
Tel: 1-360-944-7551

Europe Headquarters  
Pulse GmbH & Co, KG  
Zeppelinstrasse 15  
Herrenberg, Germany  
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.  
99 Huo Ju Road(#29 Bldg, 4<sup>th</sup> Phase  
Suzhou New District  
Jiangsu Province, Suzhou 215009 PR China  
Tel: 86 512 6807 9998



Series: GLS

**Description:** Interior 2dBi Glass Mount  
Dipole 758-896MHz**PART NUMBER: KGI768****ELECTRICAL SPECIFICATIONS**

Antenna Type	Glass Mount Dipole
Frequency	758-896 MHz
Nominal Impedance	50 $\Omega$
VSWR	2:1
Radiation Pattern	Omni
Gain	2 dBi
Polarization	Vertical


**MECHANICAL SPECIFICATIONS**

Overall Length	170 mm
Weight	200 g
Antenna Color / Material	Black / PC/PET
Connector type	No connector
Cable type	RG-58
Cable length	14 feet / 4267 mm

**ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature	-40 to +85 ° C
RoHS Compliant	Yes


**MECHANICAL DRAWING**

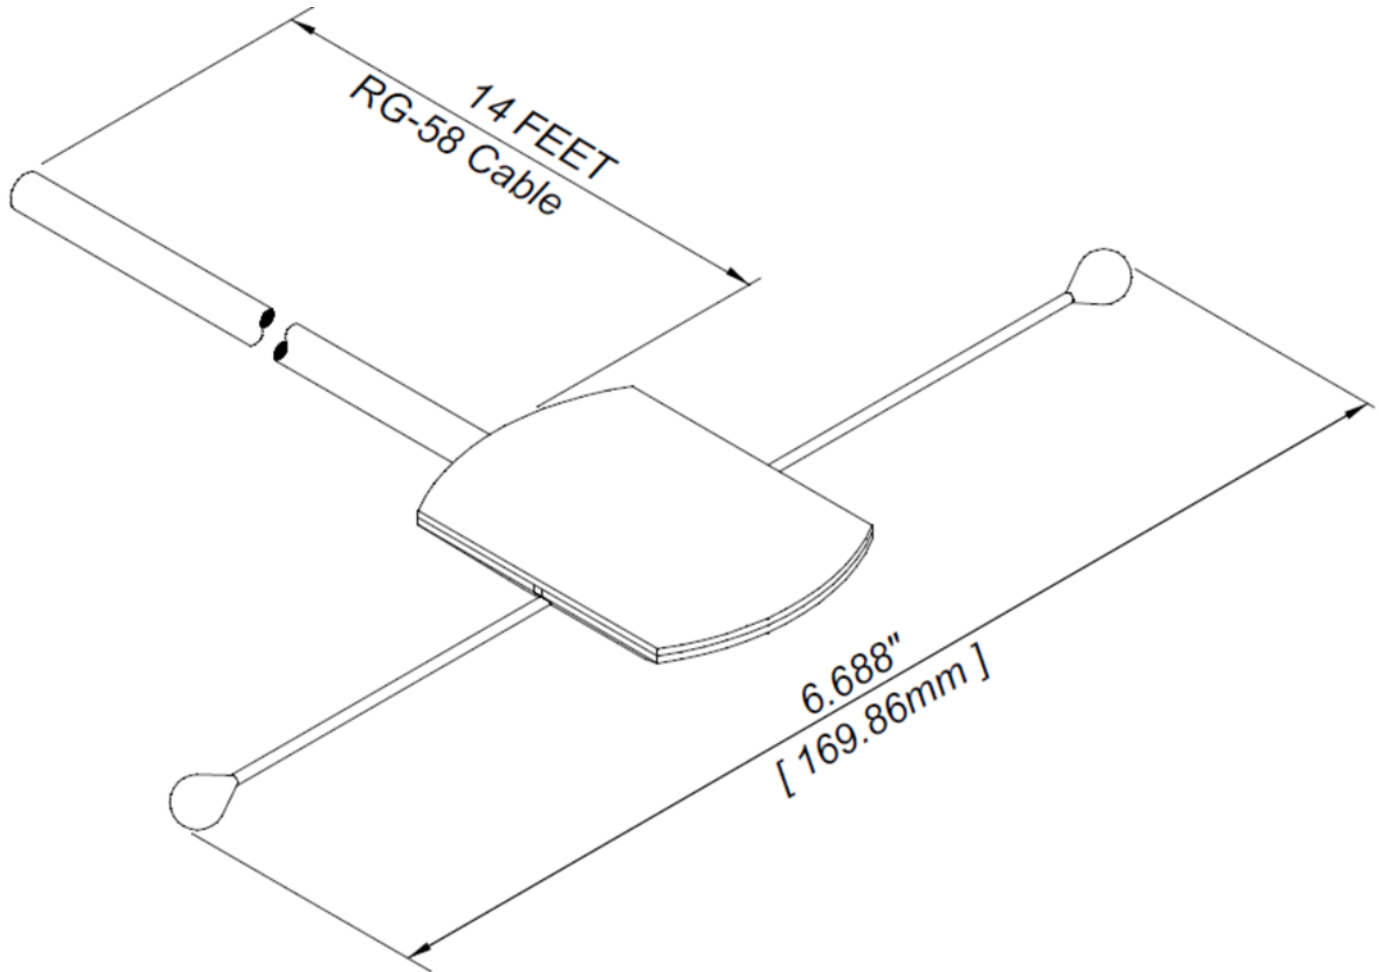

## TEST SETUP



## CHARTS

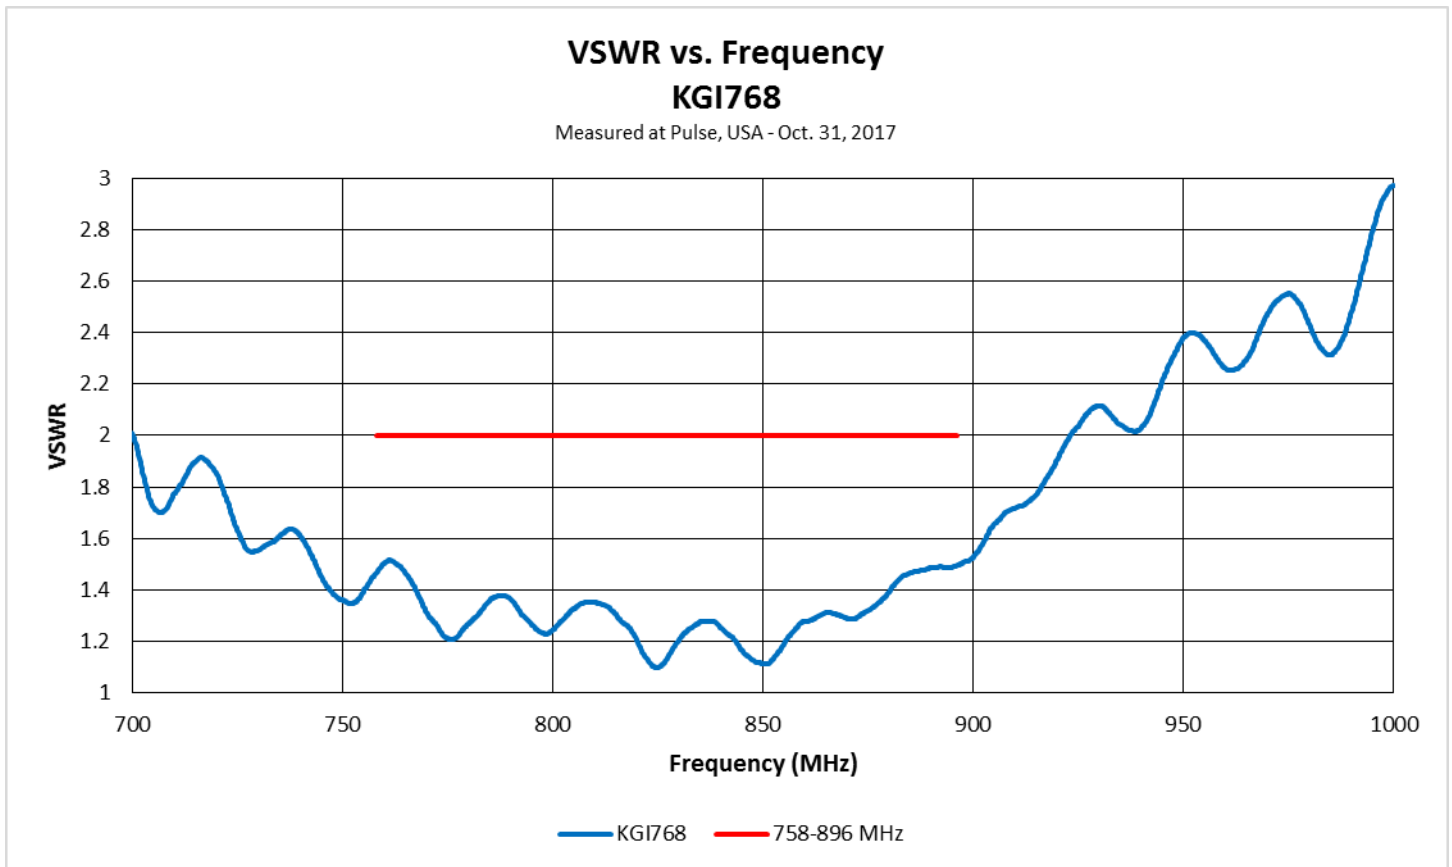

## PACKAGING

- 1 antenna packed in a plastic bag
- 1 label on plastic bag with part number, date code.


## ASSEMBLY

### PRE-INSTALLATION TIPS

- For the best performance, the KGI should be mounted vertically, but the horizontal position may be satisfactory in areas with a high penetration of cell sites (see Figure 1).
- Capacitance plates do not need to straddle the heater wires on the glass because the inside whips are the radiator.

### INSTALLATION

1. Vehicle glass should be room temperature 72° F (22° C) prior to installation.
2. Clean inside mounting area with enclosed alcohol pad.
3. Peel protective liner from adhesive tape on the inside coupler. Mount the inside coupler starting at the top and rolling downward. Press firmly on all corners and in the center to ensure maximum contact.
4. Route coax to the radio/phone

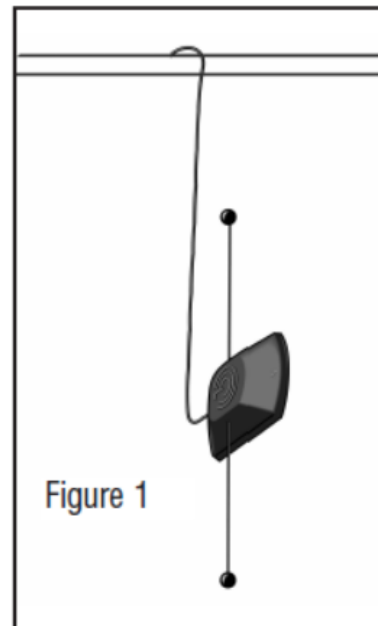

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

KGI768