

# **DATA SHEET**

## **GENERAL PURPOSE CHIP RESISTORS**

RC\_L series

±0.1%, ±0.5%, ±1%, ±5% Sizes 0075/0100/0201/0402/0603/0805/ 1206/1210/1218/2010/2512

RoHS compliant & Halogen free







## SCOPE

This specification describes RC series chip resistors with lead free terminations made by thick film process.

## **APPLICATIONS**

• All general purpose application

## **FEATURES**

- Halogen Free Epoxy
- RoHS compliant
  - Products with lead free terminations meet RoHS requirements
  - Pb-glass contained in electrodes, resistors element and glass are exempted by RoHS
- Reducing environmentally hazardous wastes
- High component and equipment reliability
- Saving of PCB space
- None forbidden-materials used in products/production
- MSL class: MSL I

#### ORDERING INFORMATION - GLOBAL PART NUMBER

Global part numbers are identified by the series, size, tolerance, packing type, temperature coefficient, taping reel and resistance value.

## **GLOBAL PART NUMBER**

## RC XXXX X X X XX XXXX L

(1) (2) (3) (4) (5)

6) (

(I) SIZE

0075/0100/0201/0402/0603/0805/1206/1210/1218/2010/2512

## (2) TOLERANCE

 $B = \pm 0.1\%$ 

 $D = \pm 0.5\%$ 

 $F = \pm 1.0\%$ 

 $J = \pm 5.0\%$  (for jumper ordering, use code of J)

## (3) PACKAGING TYPE

R = Paper taping reel

K = Embossed taping reel

S = ESD safe reel (0075/0100 only)

#### (4) TEMPERATURE COEFFICIENT OF RESISTANCE

- = Based on spec.

## (5) TAPING REEL & POWER

07 = 7 inch dia. Reel & Standard power

10 = 10 inch dia. Reel

13 = 13 inch dia, Reel

7W = 7 inch dia. Reel &  $2 \times$  standard power

7N = 7 inch dia. Reel, ESD safe reel (0075/0100 only)

3W = 13 inch dia. Reel & 2 x standard power

## (6) RESISTANCE VALUE

There are 2~4 digits indicated the resistance value.

Letter R/K/M is decimal point

Example:

 $97R6 = 97.6\Omega$ 

 $9K76 = 9760\Omega$ 

 $IM = I,000,000\Omega$ 

## (7) DEFAULT CODE

Letter L is the system default code for ordering only. (Note)

## **ORDERING EXAMPLE**

The ordering code for a RC0402 0.0625W chip resistor value  $100 \text{K}\Omega$  with  $\pm$  5% tolerance, supplied in 7-inch tape reel of 10,000 units per reel is: RC0402JR-07100KL.

#### NOTE

- 1. All our RSMD products meet RoHS compliant and Halogen Free. "LFP" of the internal 2D reel label mentions "Lead Free Process".
- 2. On customized label, "LFP" or specific symbol can be printed.





**Chip Resistor Surface Mount** 

RC\_L

SERIES

0075 to 2512

## **MARKING**

## RC0075 / RC0100 / RC0201 / RC0402




No Marking

Fig. 1

#### RC0603





1%, 0.5%,E24 exception values 10/11/13/15/20/75 of E24 series





1%, 0.5%, E96 refer to EIA-96 marking method, including values 10/11/13/15/20/75 of E24 series





5%, E24 series: 3 digits


First two digits for significant figure and 3rd digit for number of zeros

## RC0805 / RC1206 / RC1210 / RC2010 / RC2512



1%, 0.5%, E24/E96 series: 4 digits


First three digits for significant figure and 4th digit for number of zeros



5%, E24 series: 3 digits


First two digits for significant figure and 3rd digit for number of zeros

## RC1218



E-24 series: 3 digits, ±5%

First two digits for significant figure and 3rd digit for number of zeros



Both E-24 and E-96 series: 4 digits, ±1% & ±0.5%

First three digits for significant figure and 4th digit for number of zeros


For further marking information, please see special data sheet "Chip resistors marking".

0075 to 2512

## **CONSTRUCTION**

The resistor is constructed on top of a high-grade ceramic body. Internal metal electrodes are added on each end to make the contacts to the thick film resistive element. The composition of the resistive element is a noble metal imbedded into a glass and covered by a second glass to prevent environmental influences. The resistor is laser trimmed to the rated resistance value. The resistor is covered with a protective epoxy coat, finally the two external terminations (matte tin on Ni-barrier) are added, as shown in Fig. 9.

## **Outlines**



## **DIMENSION**

Table I

TYPE	L (mm)	W (mm)	H (mm)	I <sub>I</sub> (mm)	l <sub>2</sub> (mm)
RC0075	0.30±0.01	0.15±0.01	0.13±0.01	0.08±0.03	0.08±0.03
RC0100	0.40±0.02	0.20±0.02	0.13±0.02	0.10±0.03	0.10±0.03
RC0201	0.60±0.03	0.30±0.03	0.23±0.03	0.10±0.05	0.15±0.05
RC0402	1.00±0.05	0.50±0.05	0.35±0.05	0.20±0.10	0.25±0.10
RC0603	1.60±0.10	0.80±0.10	0.45±0.10	0.25±0.15	0.25±0.15
RC0805	2.00±0.10	1.25±0.10	0.50±0.10	0.35±0.20	0.35±0.20
RC1206	3.10±0.10	1.60±0.10	0.55±0.10	0.45±0.20	0.45±0.20
RC1210	3.10±0.10	2.60±0.15	0.55±0.10	0.45±0.15	0.50±0.20
RC1218	3.10±0.10	4.60±0.10	0.55±0.10	0.45±0.20	0.40±0.20
RC2010	5.00±0.10	2.50±0.15	0.55±0.10	0.60±0.20	0.55±0.20
RC2512	6.35±0.10	3.10±0.15	0.55±0.10	0.60±0.20	0.60±0.20

## **ELECTRICAL CHARACTERISTICS**

Table 2

CHARAC- TERISTICS	POWER	OPERATING TEMPERATURE RANGE	MAXIMUM WORKING VOLTAGE	MAXIMUM OVERLOAD VOLTAGE	DIELECTRIC WITHSTANDING VOLTAGE	resistance range	TEMPERATURE COEFFICIENT	JUMPER CRITERIA
RC0075	1/50 W	-55℃ to I25℃	IOV	25V	25V	$\begin{array}{c} 5\% \text{ (E24)} \\ 10\Omega \leqq R \leqq \text{ IM}\Omega \\ 1\% \text{ (E24/E96)} \\ 10\Omega \leqq R \leqq \text{ IM}\Omega \\ \text{Jumper} < 50\text{m}\Omega \end{array}$	$\begin{array}{c} 10\Omega \leqq R < 100\Omega \\ -200 \sim +600 ppm^{\circ}C \\ 100\Omega \leqq R \leqq IM\Omega \\ \pm 200 ppm^{\circ}C \end{array}$	Rated Current 0.5A Maximum Current 1.0A
RC0100	1/32 W	-55°C to l25°C	15V	30V	30V	$\begin{array}{c} 5\% \text{ (E24)} \\ \text{I} \Omega \leq \text{R} \leq 22\text{M}\Omega \\ \text{I} \% \text{ (E24/E96)} \\ \text{I} \Omega \leq \text{R} \leq \text{IOM}\Omega \\ \text{0.5\% (E24/E96)} \\ 33\Omega \leq \text{R} \leq 470\text{K}\Omega \\ \text{Jumper} < 50\text{m}\Omega \end{array}$	$\begin{split} & \Gamma\Omega \leqq R < 10\Omega \\ -200 \sim +600 ppm ^{\circ}C \\ & 10\Omega \leqq R < 100\Omega : \\ & \pm 300 ppm /^{\circ}C \\ & 100\Omega \leqq R \leqq 10M\Omega : \\ & \pm 200 ppm /^{\circ}C \\ & 10M\Omega < R \leqq \\ & 22M\Omega : \\ & \pm 250 ppm /^{\circ}C \end{split}$	Rated Current 0.5A Maximum Current 1.0A



Product specification

5

Table 2

lable 2								
CHARAC- TERISTICS	POWER	OPERATING TEMPERATURE RANGE	MAXIMUM WORKING VOLTAGE	MAXIMUM OVERLOAD VOLTAGE	DIELECTRIC WITHSTANDING VOLTAGE	resistance range	TEMPERATURE COEFFICIENT	JUMPER CRITERIA
RC0201	1/20 W	-55°C to l25°C	25V	50V	50V	$\begin{array}{c} 5\% \text{ (E24)} \\ I\Omega \leqq R \leqq I0M\Omega \\ I\% \text{ (E24/E96)} \\ I\Omega \leqq R \leqq I0M\Omega \\ 0.5\% \text{ (E24/E96)} \\ I\Omega \leqq R \leqq IM\Omega \\ 0.1\% \text{ (E24/E96)} \\ I0\Omega \leqq R \leqq IM\Omega \\ Jumper < 50m\Omega \\ \end{array}$	$\begin{array}{c} I\Omega \leqq R \leqq I0\Omega \\ -100 \sim +350 ppm \\ ^{\circ}C \\ I0\Omega < R \leqq I0M\Omega \\ \pm 200 ppm ^{\circ}C \end{array}$	Rated Current 0.5A Maximum Current 1.0A
RC0402	1/16 W	-55°C to l55°C	50V	100V	100V	$\begin{array}{c} 5\% \text{ (E24)} \\ 1\Omega \leqq R \leqq 22M\Omega \\ 1\% \text{ (E24/E96)} \\ 1\Omega \leqq R \leqq 10M\Omega \\ 0.5\% \text{ (E24/E96)} \\ 1\Omega \leqq R \leqq 1M\Omega \\ 0.1\% \text{ (E24/E96)} \\ 10\Omega \leqq R \leqq 1M\Omega \\ \text{Jumper} < 50m\Omega \\ \end{array}$	$\begin{split} & \hspace{0.1cm} 0.1c$	Rated Current I.OA Maximum Current 2.0A
	1/8W	-55°C to 155°C	50V	100V	100V	$\begin{array}{c} 5\% \text{ (E24)} \\ \text{I } \Omega \leqq \text{R} \leqq \text{I M} \Omega \\ \text{I \% (E24/E96)} \\ \text{I } \Omega \leqq \text{R} \leqq \text{I M} \Omega \end{array}$	IΩ≦R≦IMΩ ±200ppm°C	
RC0603	1/10 W	-55°C to 155°C	75V	150V	150V	$5\%$ (E24) $1\Omega \le R \le 22M\Omega$ $1\%$ (E24/E96) $1\Omega \le R \le 10M\Omega$ $0.5\%$ (E24/E96) $1\Omega \le R \le 1M\Omega$ $0.1\%$ (E24/E96) $10\Omega \le R \le 1M\Omega$ Jumper<50mΩ	$\begin{split} & \hspace{0.1cm} 0.1c$	Rated Current I.0A Maximum Current 2.0A
	1/5 W	-55℃ to I55℃	75V	150V	150V	5% (E24) $I\Omega \leq R \leq IM\Omega$ I% (E24/E96) $I\Omega \leq R \leq IM\Omega$	IΩ≦R≦IMΩ ±200ppm°C	
RC0805	1/8 W	-55°C to 155°C	150V	300V	300V	$\begin{array}{c} 5\% \ (\text{E24}) \\ 1\Omega \leqq R \leqq 100\text{M}\Omega \\ 1\% \ (\text{E24/E96}) \\ 1\Omega \leqq R \leqq 10\text{M}\Omega \\ 0.5\% \ (\text{E24/E96}) \\ 1\Omega \leqq R \leqq 1\text{M}\Omega \\ 0.1\% \ (\text{E24/E96}) \\ 10\Omega \leqq R \leqq 1\text{M}\Omega \\ 10\%, 20\% \ (\text{E24}) \\ 24\text{M}\Omega \leqq R \leqq 100\text{M}\Omega \\ \text{Jumper} < 50\text{m}\Omega \end{array}$	$\begin{split} & \hspace{0.1cm} 0.1c$	Rated Current 2.0A Maximum Current 5.0A
	1/4 W	-55℃ to I55℃	150V	300V	300V	5% (E24) $1\Omega \le R \le 1M\Omega$ 1% (E24/E96) $1\Omega \le R \le 1M\Omega$	IΩ≦R≦IMΩ ±200ppm°C	



Chip Resistor Surface Mount RC\_L SERIES 0075 to 2512

## FOOTPRINT AND SOLDERING PROFILES

For recommended footprint and soldering profiles, please refer to data sheet "Chip resistors mounting"

Table	3
-------	---

CHARAC- TERISTICS	POWER	OPERATING TEMPERATURE RANGE	MAXIMUM WORKING VOLTAGE	MAXIMUM OVERLOAD V VOLTAGE	DIELECTRIC WITHSTANDING VOLTAGE	resistance range	TEMPERATURE COEFFICIENT	JUMPER CRITERIA
RC1206	1/4 W	-55°C to l55°C	200V	400V	500V	$\begin{array}{c} 5\% \ (\text{E24}) \\  \Omega \leqq \text{R} \leqq  000M\Omega \\  \% \ (\text{E24/E96}) \\  \Omega \leqq \text{R} \leqq  00M\Omega \\ 0.5\% \ (\text{E24/E96}) \\  \Omega \leqq \text{R} \leqq  M\Omega \\ 0.1\% \ (\text{E24/E96}) \\  0\Omega \leqq \text{R} \leqq  M\Omega \\  00\% \ 20\% \ (\text{E24}) \\ 24\text{M}\Omega \leqq \text{R} \leqq  000M\Omega \\  \text{Jumper} < 50\text{m}\Omega \end{array}$	$\begin{split} & \hspace{0.1cm} I\hspace{0.1cm} \Omega \! \leq \! R \! \leq \! I\hspace{0.1cm} \Omega \Omega \\ & \hspace{0.1cm} \pm 200 ppm^{\circ}\hspace{0.1cm} \mathbb{C} \\ & \hspace{0.1cm} I\hspace{0.1cm} I\hspace{0.1cm} O\hspace{0.1cm} Q \! \leq \! R \! \leq \! I\hspace{0.1cm} O\hspace{0.1cm} M\hspace{0.1cm} \Omega \\ & \hspace{0.1cm} \pm I\hspace{0.1cm} O\hspace{0.1cm} ppm^{\circ}\hspace{0.1cm} \mathbb{C} \\ & \hspace{0.1cm} I\hspace{0.1cm} O\hspace{0.1cm} M\hspace{0.1cm} \Omega \! \leq \! R \! \leq \\ & \hspace{0.1cm} I\hspace{0.1cm} O\hspace{0.1cm} M\hspace{0.1cm} \Omega \\ & \hspace{0.1cm} \pm 300 ppm^{\circ}\hspace{0.1cm} \mathbb{C} \end{split}$	Rated Current 2.0A Maximum Current 10.0A
	1/2 W	-55°C to 155°C	200V	400V	500V	$\begin{array}{c} 5\% \text{ (E24)} \\ \text{I} \Omega \leqq \text{R} \leqq \text{IM}\Omega \\ \text{I} \% \text{ (E24/E96)} \\ \text{I} \Omega \leqq \text{R} \leqq \text{IM}\Omega \end{array}$	$1\Omega \le R \le 1M\Omega$ $\pm 200$ ppm°C	
RC1210	1/2 W	-55°C to l55°C	200V	500V	500V	$\begin{array}{c} 5\% \ (\text{E24}) \\ \text{I} \ \Omega \! \leq \! R \! \leq \! 22M\Omega \\ \text{I} \ \% \ (\text{E24/E96}) \\ \text{I} \ \Omega \! \leq \! R \! \leq \! 10M\Omega \\ \text{0.1\%, 0.5\% (E24/E96)} \\ \text{I} \ \Omega \! \leq \! R \! \leq \! 1M\Omega \\ \text{Jumper} \! < \! 50m\Omega \end{array}$	$\begin{array}{c} I\Omega \leqq R \leqq I\Omega\Omega \\ \pm 200ppm^{\circ}C \\ I\Omega\Omega < R \leqq IDM\Omega \\ \pm I0Dppm^{\circ}C \\ IDM\Omega < R \leqq 22M\Omega \\ \pm 200ppm^{\circ}C \end{array}$	Rated Current 2.0A Maximum Current 10.0A
RC1218	ΙW	-55°C to l55°C	200V	500V	500V	$5\%$ (E24) $I\Omega \le R \le IM\Omega$ $I\%$ (E24/E96) $I\Omega \le R \le IM\Omega$ 0.1%, 0.5% (E24/E96) $I\Omega \subseteq R \le IM\Omega$ Jumper<50mΩ	$1\Omega \le R \le 10\Omega$ $\pm 200 ppm^{\circ}C$ $10\Omega < R \le 1M\Omega$ $\pm 100 ppm^{\circ}C$	Rated Current 6.0A Maximum Current 10.0A
RC2010	3/4 W	-55℃ to I55℃	200V	500V	500V	$5\%$ (E24) $1\Omega \le R \le 22M\Omega$ $1\%$ (E24/E96) $1\Omega \le R \le 10M\Omega$ 0.1%, 0.5% (E24/E96) $10\Omega \le R \le 1M\Omega$ Jumper<50mΩ	$\begin{split} & \hspace{0.1cm} 0.1c$	Rated Current 2.0A Maximum Current 10.0A
RC2512	ΙW	-55°C to l55°C	200V	500V	500V	$ 5\% \ (E24) \\ I\Omega \leqq R \leqq 22M\Omega \\ I\% \ (E24/E96) \\ I\Omega \leqq R \leqq I0M\Omega \\ 0.1\%, 0.5\% \ (E24/E96) \\ I0\Omega \leqq R \leqq IM\Omega \\ Jumper < 50m\Omega $	$\begin{split} & 1\Omega \! \leq \! R \! \leq \! 10\Omega \\ & \pm 200 ppm^{\circ} C \\ & 10\Omega \! < \! R \! \leq \! 10M\Omega \\ & \pm 100 ppm^{\circ} C \\ & 10M\Omega \! < \! R \! \leq \! 22M\Omega \\ & \pm 200 ppm^{\circ} C \end{split}$	Rated Current 2.0A Maximum Current 10.0A
	2 W	-55℃ to 155℃	200V	400V	500V	$5\% \text{ (E24)}$ $1\Omega \leqq R \leqq \text{ IM}\Omega$ $1\% \text{ (E24/E96)}$ $1\Omega \leqq R \leqq \text{ IM}\Omega$	IΩ≦R≦IMΩ ±200ppm°C	



## **Chip Resistor Surface Mount**

## \_

PACKING STYLE AND PACKAGING QUANTITY

Table 4 Packing style and packaging quantity

PACKING STYLE	PAPER TAPII	NG REEL (R)		ESD SAFE REEL (S) (4MM WIDTH, IMM PITCH PLASTIC EMBOSSED)	EMBOSSED T	APING REEL
REEL DIMENSION	7" (178 mm)	10" (254mm)	13" (330 mm)	7" (178 mm)	7" (178 mm)	13" (330 mm)
RC0075				20000		
RC0100	20000		80000	40000		
RC0201	10000	20000	50000			
RC0402	10000	20000	50000			
RC0603	5000	10000	20000			
RC0805	5000	10000	20000			
RC1206	5000	10000	20000			
RC1210	5000	10000	20000			
RC1218					4000	
RC2010					4000	16000
RC2512					4000	

RC\_L

SERIES

#### NOTE

For tape and reel specification/dimensions, please refer to data sheet "Chip resistors packing".

## **FUNCTIONAL DESCRIPTION**

## **OPERATING TEMPERATURE RANGE**

RC0402 to RC2512 Range: -55°C to +155°C (Fig. 10-1) RC0075 to RC0201 Range: -55°C to +125°C (Fig. 10-2)

## **POWER RATING**

Each type rated power at 70°C:

RC0075=1/50W

RC0100=1/32W

RC0201=1/20W

RC0402=1/16W, 1/8W

RC0603=1/10W, 1/5W

RC0805=1/8W, 1/4W

RC1206=1/4W, 1/2W

RC1210=1/2W

RC1218=1W

RC2010=3/4W

RC2512=1W, 2W

#### **RATED VOLTAGE**

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{(PxR)}$$


or max. working voltage whichever is less


Where

V = Continuous rated DC or AC (rms) working voltage (V)

P = Rated power (W)

 $R = Resistance value (\Omega)$ 

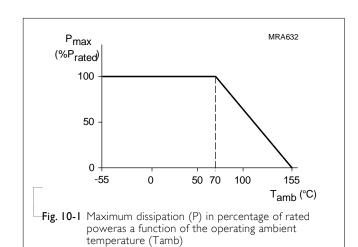





SERIES 0075 to 2512

## TESTS AND REQUIREMENTS

Table 5 Test condition, procedure and requirements

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Temperature Coefficient of	MIL-STD-202 Method 304	At +25/-55°C and +25/+125°C	Refer to table 2
Resistance		Formula:	
(T.C.R.)		T.C.R= $\frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (ppm/°C)}$	
		Where	
		$t_1$ =+25 °C or specified room temperature	
		$t_2$ =-55 °C or +125 °C test temperature	
		$R_1$ =resistance at reference temperature in ohms	
		R <sub>2</sub> =resistance at test temperature in ohms	
Life/ Endurance	MIL-STD-202 Method 108 IEC 60115-1 7.1	At 70±2°C for 1,000 hours; RCWV applied for 1.5 hours on and 0.5 hour off, still air required	0075: $\pm$ (5%+100m $\Omega$ ) <100m $\Omega$ for jumper 01005: $\pm$ (3% +50m $\Omega$ ) <100m $\Omega$ for jumper Others:
			$\pm (1\% + 50 \mathrm{m}\Omega)$ for B/D/F tol
			$\pm (3\% + 50 \text{m}\Omega)$ for J tol
			<100mR for jumper
High Temperatur e Exposure	MIL-STD-202 Method 108	I,000 hours at maximum operating temperature depending on specification, unpowered.	$0075$ : $\pm$ (5%+100m $\Omega$ ) <100m $\Omega$ for jumper 01005: $\pm$ (1% +50m $\Omega$ ) < 50m $\Omega$ for jumper
			Others:
			$\pm (1\% + 50 \text{m}\Omega)$ for B/D/F tol
			$\pm (2\% + 50 m\Omega)$ for J tol
			<50mR for jumper
Moisture Resistance	MIL-STD-202 Method 106	Each temperature / humidity cycle is defined at	0075: $\pm$ (2%+100mΩ) <100mΩ for jumper
Resistance		8 hours, 3 cycles / 24 hours for I0d with 25°C / 65°C 95% R.H, without steps	01005: $\pm$ (2% +50mΩ) < 100mΩ for jumper
		7a & 7b, unpowered	Others:
		Parts mounted on test-boards, without	$\pm (0.5\% + 50 \text{m}\Omega)$ for B/ D/F tol
		condensation on parts	$\pm$ (2%+50m $\Omega$ ) for J tol
			<100mR for jumper
Humidity	IEC 60115-1 10.4	Steady state for 1000 hours at 40°C / 95% R.H. RCWV applied for 1.5 hours on and 0.5 hour off	0075: $\pm$ (5%+100mΩ) 01005: $\pm$ (3% +50mΩ) < 100mΩ for jumper Others:
			$\pm$ (1%+50m $\Omega$ ) for B/D/F tol
			$\pm (2\% + 50 \text{m}\Omega)$ for J tol
			( )



SERIES

00	75	to	251	12
·	,,	10	20	-

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Thermal Shock	MIL-STD-202 Method 107	-55/+125°C  Note Number of cycles required is 300.  Devices mounted  Maximum transfer time is 20 seconds.  Dwell time is 15 minutes. Air - Air	0075/01005: $\pm$ (1% +50m $\Omega$ ) < 50m $\Omega$ for jumper Others: $\pm$ (0.5%+50m $\Omega$ ) for B/D/F tol $\pm$ (1%+50m $\Omega$ ) for J tol < 50mR for jumper
Short Time Overload	IEC 60115-1 8.1	2.5 times RCWV or maximum overload voltage which is less for 5 seconds at room temperature	$0075/01005: \pm (2\% + 50 \text{m}\Omega) \\ < 50 \text{m}\Omega \text{ for jumper} \\ \text{Others:} \\ \pm (1\% + 50 \text{m}\Omega) \text{ for B/D/F tol} \\ \pm (2\% + 50 \text{m}\Omega) \text{ for J tol} \\ < 50 \text{mR for jumper} \\ \text{No visible damage}$
Board Flex/ Bending	IEC 60115-1 9.8	Device mounted or as described only I board bending required bending time: 60±5 seconds 0075/0100/0201/0402:5mm; 0603/0805:3mm; I 206 and above:2mm	0075/01005: $\pm$ (1% +50m $\Omega$ ) < 50m $\Omega$ for jumper Others: $\pm$ (1%+50m $\Omega$ ) for B/D/F/J tol <50mR for jumper No visible damage
Solderability - Wetting	J-STD-002 test BI	Electrical Test not required Magnification 50X SMD conditions:  1st step: aging 4 hours at 155°C dry heat  2nd step: method B1, leadfree solder bath at 245± 3°C  Dipping time: 3± 0.5 seconds	Well tinned (>95% covered) No visible damage
-Leaching	J-STD-002 test D	Leadfree solder ,260°C, 30 seconds immersion time	No visible damage
-Resistance to Soldering Heat	MIL-STD-202 Method 210	Condition B, no pre-heat of samples Leadfree solder, $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , $10 \pm 1$ seconds immersion time Procedure 2 for SMD: devices fluxed and cleaned with isopropanol	$0075: \pm (3\% + 50 \text{m}\Omega)$ < $50 \text{m}\Omega$ for jumper $01005: \pm (1\% + 50 \text{m}\Omega)$ < $50 \text{m}\Omega$ for jumper $01065: \pm (0.5\% + 50 \text{m}\Omega)$ for B/D/F tol. $\pm (1\% + 50 \text{m}\Omega)$ for J tol. < $50 \text{m}R$ for jumper $000000000000000000000000000000000000$

## **REVISION HISTORY**

**YAGEO** 

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 12	Aug. 02, 2022	-	- 12 dimension updated, for size 1206, size 2010, size 2512.
Version II	May 15, 2020	-	- Extend RC0201, RC0402, RC0603, RC0805, RC1206 D tol resistance range to Iohm
Version 10	Dec. 12, 2018	-	- Updated 0075 dimensions
Version 9	Mar. 06, 2018	-	- Add 0.5%/1% marking rule for RC0603 ~ RC2512 based on marking datasheet
Version 8	July 10, 2017	-	- Add "3W" part number coding for 13" Reel & double power
Version 7	Mar. 7, 2017	-	- Add 10" packing
Version 6	Feb.15, 2017	-	- Extend RC0805 and RC1206 resistance range to 100Mohm
Version 5	Oct. 06, 2016	-	- Description: Update Dimension of I2 of RC2512 (2W)
Version 4	Jan. 22, 2016	-	- Update resistance range
Version 3	Dec. 24, 2015	-	- Updated test and requirements
Version 2	Jul. 23, 2015	-	- Updated test and requirements
Version I	Jan. 21, 2015	-	- ESD Safe Reel update
Version 0	Dec. 15, 2014	-	- First issue of this specification

11 11

## **SERIES**

## LEGAL DISCLAIMER

YAGEO, its distributors and agents (collectively, "YAGEO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. YAGEO may make changes, modifications and/or improvements to product related information at any time and without notice.

YAGEO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, YAGEO disclaims (i) any and all liability arising out of the application or use of any YAGEO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non -infringement and merchantability.

YAGEO products are designed for general purpose applications under normal operation and usage conditions. Please contact YAGEO for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property: Aerospace equipment (artificial satellite, rocket, etc.), Atomic energy-related equipment, Aviation equipment, Disaster prevention equipment, crime prevention equipment, Electric heating apparatus, burning equipment, Highly public information network equipment, data-processing equipment, Medical devices, Military equipment, Power generation control equipment, Safety equipment, Traffic signal equipment, Transportation equipment and Undersea equipment, or for any other application or use in which the failure of YAGEO products could result in personal injury or death, or serious property damage. Particularly YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

Information provided here is intended to indicate product specifications only. YAGEO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## YAGEO:

```
RC0100FR-0742R2L RC0100FR-07432KL RC0100FR-07432RL RC0100FR-0743K2L RC0100FR-0743R2L
RC0100FR-07442KL RC0100FR-07442RL RC0100FR-0744K2L RC0100FR-07453KL RC0100FR-0745K3L
RC0100FR-07464KL RC0100FR-07464RL RC0100FR-0746K4L RC0100FR-0746R4L RC0100FR-0747R5L
RC0100FR-07487KL RC0100FR-07487RL RC0100FR-0748K7L RC0100FR-0748R7L RC0100FR-07499KL
RC0100FR-074K02L RC0100FR-074K12L RC0100FR-074K32L RC0100FR-074K42L RC0100FR-074K53L
RC0100FR-074K75L RC0100FR-074K87L RC0100FR-074K99L RC0100FR-074M02L RC0100FR-074M12L
RC0100FR-074M22L RC0100FR-074M32L RC0100FR-074M42L RC0100FR-074M53L RC0100FR-074M64L
RC0100FR-074M75L RC0100FR-074M87L RC0100FR-074M99L RC0100FR-074R22L RC0100FR-074R42L
RC0100FR-074R53L RC0100FR-074R64L RC0100FR-074R75L RC0100FR-07511RL RC0100FR-0751K1L
RC0100FR-0751KL RC0100FR-07523KL RC0100FR-0752K3L RC0100FR-07536KL RC0100FR-07536RL
RC0100FR-0753R6L RC0100FR-07549KL RC0100FR-0754R9L RC0100FR-07562RL RC0100FR-0756K2L
RC0100FR-0756R2L RC0100FR-07576RL RC0100FR-0757K6L RC0100FR-07590RL RC0100FR-0759KL
RC0100FR-0759RL RC0100FR-075K49L RC0100FR-075M11L RC0100FR-075M23L RC0100FR-075M36L
RC0100FR-075M49L RC0100FR-075M62L RC0100FR-075M76L RC0100FR-075M9L RC0100FR-075R11L
RC0100FR-075R23L RC0100FR-075R36L RC0100FR-075R49L RC0100FR-075R62L RC0100FR-075R76L
RC0100FR-075R9L RC0100FR-07604KL RC0100FR-07619KL RC0100FR-0761R9L RC0100FR-07634KL
RC0100FR-0763K4L RC0100FR-07649KL RC0100FR-0764K9L RC0100FR-0766R5L RC0100FR-0768K1L
RC0100FR-07698RL RC0100FR-0769K8L RC0100FR-0769R8L RC0100FR-076K04L RC0100FR-076K65L
RC0100FR-076K81L RC0100FR-076M04L RC0100FR-076M19L RC0100FR-076M34L RC0100FR-076M49L
RC0100FR-076M65L RC0100FR-076M81L RC0100FR-076M98L RC0100FR-076R04L RC0100FR-076R19L
```