

DATA SHEET

CURRENT SENSOR - LOW TCR
AUTOMOTIVE GRADE
PE_L series
5%, 1%, 0.5%

sizes
0201/0402/ 0603/ 0805/ 1206/ 2010/ 2512

RoHS compliant & Halogen free



SCOPE

This specification describes PE series current sensor - low TCR with lead-free terminations made by metal foil with ceramic substrate.

APPLICATIONS

- Consumer goods
- Computer
- Telecom / Datacom
- Industrial / Power supply
- Automotive
- Alternative Energy

FEATURES

- Comply with AEC-Q200 standard
- Halogen-free Epoxy
- RoHS compliant
 - Products with lead-free terminations meet RoHS requirements
 - Pb-glass contained in electrodes, resistor element and glass are exempted by RoHS
- Reduce environmentally hazardous wastes
- High component and equipment reliability
- None forbidden-materials used in products/production
- Low resistances applied to current sensing

ORDERING INFORMATION – GLOBAL PART NUMBER

Global part numbers are identified by the series, size, tolerance, packing type, temperature coefficient, taping reel and resistance value.

GLOBAL PART NUMBER

PE XXXX X X X XX XXXX L
 (1) (2) (3) (4) (5) (6) (7)

(1) SIZE

0201 / 0402 / 0603 / 0805 / 1206 / 2010 / 2512

(2) TOLERANCE

D = $\pm 0.5\%$ F = $\pm 1\%$ J = $\pm 5\%$

(3) PACKAGING TYPE

R = Paper / PE taping reel
 K = Embossed taping reel

(4) TEMPERATURE COEFFICIENT OF RESISTANCE

E = ± 50 ppm/ $^{\circ}\text{C}$
 M = ± 75 ppm/ $^{\circ}\text{C}$
 F = ± 100 ppm/ $^{\circ}\text{C}$
 J = ± 350 ppm/ $^{\circ}\text{C}$

(5) TAPING REEL

07 / 7W / 7T / 47 / 57 = 7 inch dia. Reel and specific rated power.
 Detailed power rating are shown in the Table 2.

(6) RESISTANCE VALUE

5 m Ω to 910 m Ω
 There are 3~5 digits indicated the resistance value. Letter R is decimal point.
 Detailed coding rules of resistance are shown in the table of "Resistance rule of global part number".

(7) DEFAULT CODE

Letter L is the system default code for ordering only. (Note)

Resistance rule of global part number

Resistance code rule	Example
0RXXX	0R001 = 1 m Ω
(1 to 910 m Ω)	0R1 = 100 m Ω
	0R91 = 910 m Ω

ORDERING EXAMPLE


The ordering code of a PE2512 1W chip resistor, value 0.006 Ω with $\pm 1\%$ tolerance, supplied in 7-inch tape reel is:
 PE2512FKM070R006L

NOTE

I. All our RSMD products are RoHS compliant. "LFP" of the internal 2D reel label mentions "Lead-Free Process"


MARKING

PE0201 / PE0402




No marking

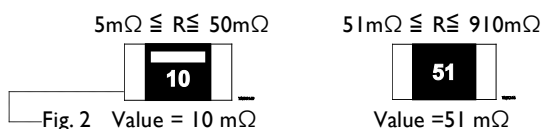PE0603




2 digits

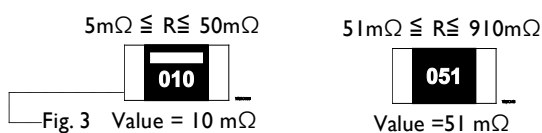PE0805



3 digits

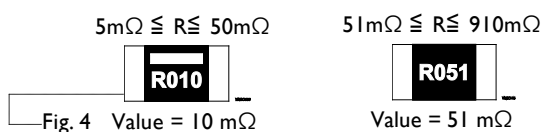PE1206 / PE2010 / PE2512





4 digits

The “R” is used as a decimal point; the other 3 digits are significant

Outlines

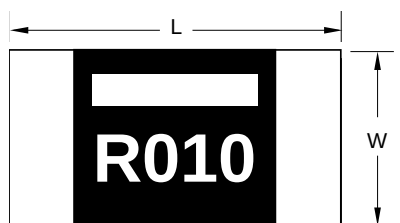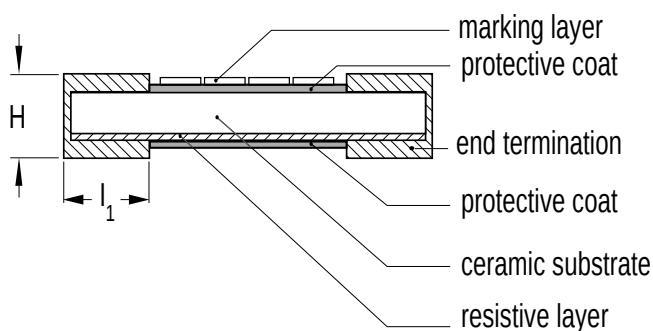For dimensions, please refer to Table I

 $5\text{m}\Omega \leq R \leq 50\text{m}\Omega$

 $51\text{m}\Omega \leq R \leq 910\text{m}\Omega$


YNSC143

Fig. 5 Chip resistor outlines

DIMENSION

Table 1 For outlines, please refer to Fig. 4

TYPE	RESISTANCE RANGE	L (mm)	W (mm)	H (mm)	l ₁ (mm)
PE0201	20 mΩ ≤ R ≤ 200 mΩ	0.60±0.03	0.31±0.04	0.27±0.04	0.14±0.06
PE0402	10 mΩ ≤ R ≤ 910 mΩ	1.00+0.10/-0.15	0.50+0.10/-0.15	0.35±0.15	0.25±0.10
PE0603	5 mΩ ≤ R ≤ 50 mΩ	1.60±0.20	0.76±0.25	0.35±0.25	0.38±0.25
	51 mΩ ≤ R ≤ 910 mΩ	1.52±0.25	0.76±0.25	0.45±0.10	0.38±0.25
PE0805	5 mΩ	2.03±0.25	1.27±0.25	0.35±0.25	0.73±0.15
	6 mΩ	2.03±0.25	1.27±0.25	0.35±0.25	0.65±0.15
	7 mΩ ≤ R ≤ 50 mΩ	2.03±0.25	1.27±0.25	0.35±0.25	0.38±0.25
	51 mΩ ≤ R ≤ 910 mΩ	2.03±0.25	1.27±0.25	0.55±0.10	0.35±0.20
PE1206	5 mΩ	3.20±0.25	1.60±0.25	0.64±0.25	0.64±0.25
	6 mΩ ≤ R ≤ 910 mΩ	3.20±0.25	1.60±0.25	0.64±0.25	0.51±0.25
PE2010	5 mΩ ≤ R ≤ 6 mΩ	5.08±0.25	2.54±0.25	0.64±0.25	1.47±0.25
	7 mΩ ≤ R ≤ 100 mΩ	5.08±0.25	2.54±0.25	0.64±0.25	0.51±0.25
PE2512	6 mΩ ≤ R ≤ 100 mΩ	6.35±0.25	3.18±0.25	0.64±0.25	0.76±0.25

Note:

1. For relevant physical dimensions, please refer to construction outlines.
2. Please contact with sales offices, distributors and representatives in your region before ordering.

ELECTRICAL CHARACTERISTICS

Table 2

SERIES	SIZE	POWER RATING ⁽¹⁾					TOLERANCE	RESISTANCE RANGE	TEMPERATURE COEFFICIENT OF RESISTANCE
		07	7W	7T	47	57			
PE	0201	1/20W	1/10W	---	---	---		$20\text{ m}\Omega \leq R \leq 200\text{ m}\Omega$	$20\text{ m}\Omega \leq R \leq 70\text{ m}\Omega \pm 350\text{ ppm}/^\circ\text{C}$ $70\text{ m}\Omega < R \leq 200\text{ m}\Omega \pm 100\text{ ppm}/^\circ\text{C}$
	0402	1/16W	1/8W	1/6W	1/4W	---		$10\text{ m}\Omega \leq R \leq 910\text{ m}\Omega$	$\pm 100\text{ ppm}/^\circ\text{C}$
	0603	1/10W	1/5W	1/3W	2/5W	1/2W	$\pm 0.5\%$	$5\text{ m}\Omega \leq R \leq 50\text{ m}\Omega$	$\pm 75\text{ ppm}/^\circ\text{C}$
	0805	1/8W	1/4W	1/3W	1/2W	---	$\pm 1\%$		$\pm 100\text{ ppm}/^\circ\text{C}$
	1206	1/4W	1/2W	---	1W	---	$\pm 5\%$	$51\text{ m}\Omega \leq R \leq 910\text{ m}\Omega$	$\pm 100\text{ ppm}/^\circ\text{C}$
	2010	1/2W	1W	---	---	---		$5\text{ m}\Omega \leq R \leq 100\text{ m}\Omega$	$\pm 50\text{ ppm}/^\circ\text{C}$
	2512	1W	2W	---	---	---		$6\text{ m}\Omega \leq R \leq 100\text{ m}\Omega$	$\pm 75\text{ ppm}/^\circ\text{C}$ $\pm 100\text{ ppm}/^\circ\text{C}$

Note: 1. Global part number (code 10 - 11)

2. Please contact with sales offices, distributors and representatives in your region before ordering.

FUNCTIONAL DESCRIPTION**OPERATING TEMPERATURE RANGE**PE0201 to PE0402 Range: -55°C to $+125^\circ\text{C}$ (Fig. 6-1)PE0603 to PE2512 Range: -55°C to $+170^\circ\text{C}$ (Fig. 6-2)**POWER RATING**Standard rated power at 70°C :

PE0201 = 1/20W

PE0402 = 1/16W

PE0603 = 1/10W

PE0805 = 1/8W

PE1206 = 1/4W

PE2010 = 1/2W

PE2512 = 1W

For detail power value, please refer to Table 2.

RATED VOLTAGE

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{P \times R}$$

Where

V = Continuous rated DC or AC (rms) working voltage (V)

P = Rated power (W)

R = Resistance value (Ω)

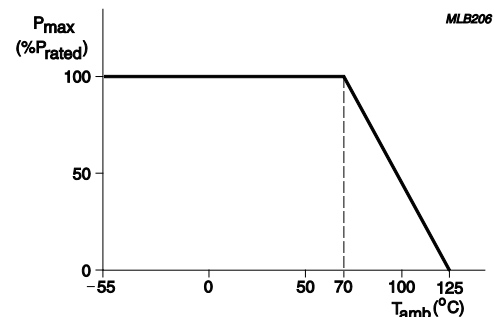


Fig. 6-1 Maximum dissipation ($P_{\max}$) in percentage of rated power as a function of the operating ambient temperature (T_{amb})

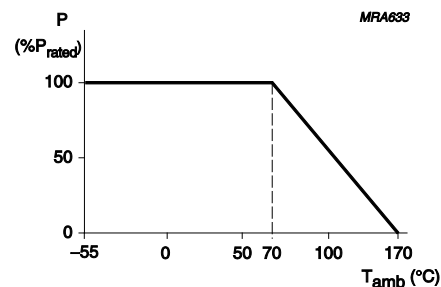


Fig. 6-2 Maximum dissipation ($P_{\max}$) in percentage of rated power as a function of the operating ambient temperature (T_{amb})

PACKING STYLE AND PACKAGING QUANTITY

Table 3 Packing style and packaging quantity

PACKING STYLE	REEL DIMENSION	PE0201	PE0402	PE0603	PE0805	PE1206	PE2010	PE2512
Paper taping reel (R)	7" (178 mm)	10,000	10,000	5,000	5,000	4,000	---	---
Embossed taping reel (K)	7" (178 mm)	---	---	---	---	---	4,000	4,000

PAPER TAPE

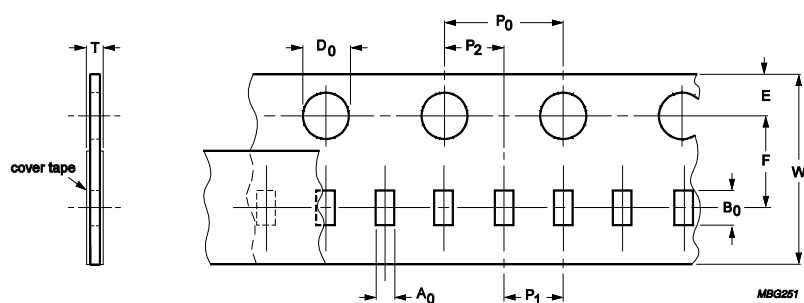


Fig. 7 Paper Tape

Table 4 Dimensions of paper tape for relevant chip resistors size

SIZE	SYMBOL										Unit: mm
	A_0	B_0	W	E	F	P_0	P_1	P_2	$\varnothing D_0$	T	
PE0201	0.35 ± 0.10	1.65 ± 0.10	8.00 ± 0.30	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	2.00 ± 0.05	1.50 ± 0.10	0.53 ± 0.10	
PE0402	0.65 ± 0.10	1.15 ± 0.10	8.00 ± 0.30	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	2.00 ± 0.05	1.50 ± 0.10	0.53 ± 0.10	
PE0603	1.20 ± 0.15	1.90 ± 0.15	8.00 ± 0.30	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	1.50 ± 0.10	0.55 ± 0.15	
PE0805	1.60 ± 0.15	2.30 ± 0.15	8.00 ± 0.30	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	1.50 ± 0.10	0.85 ± 0.15	
PE1206	1.90 ± 0.10	3.50 ± 0.10	8.00 ± 0.30	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	1.50 ± 0.10	1.50 ± 0.10	


EMBOSSED TAPE


Fig. 8 Embossed Tape

Table 5 Dimensions of embossed tape for relevant chip resistors size

SIZE	SYMBOL										Unit: mm
	A_0	B_0	W	E	F	P_0	P_1	P_2	$\varnothing D_0$	$\varnothing D_1$	T
PE2010	3.00 ± 0.15	5.60 ± 0.15	12.10 ± 0.30	1.75 ± 0.10	5.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	1.50 ± 0.10	1.50 ± 0.10	0.80 ± 0.15
PE2512	3.40 ± 0.15	6.70 ± 0.15	12.10 ± 0.30	1.75 ± 0.10	5.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	1.50 ± 0.10	1.50 ± 0.10	0.80 ± 0.15

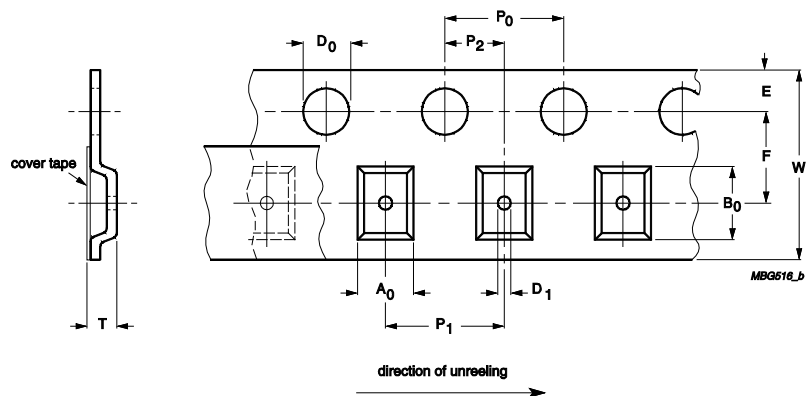REEL SPECIFICATION


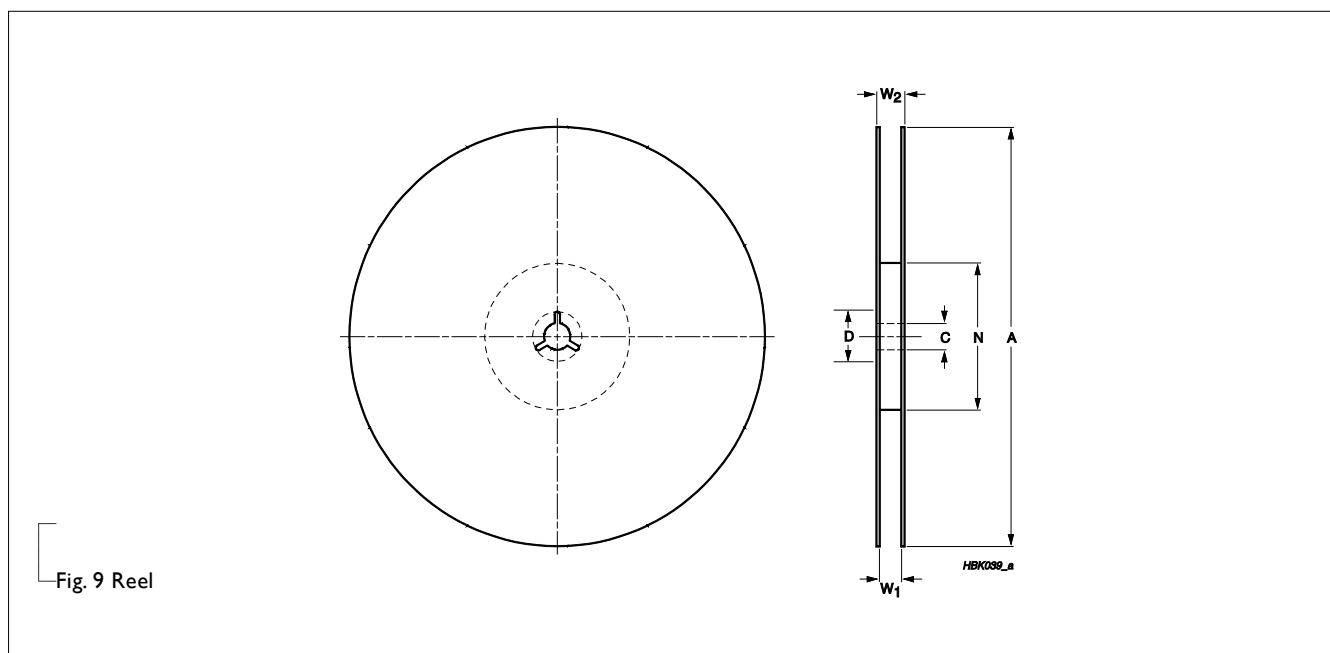


Table 6 Dimensions of reel specification for relevant chip resistors size

SIZE	QUANTITY PER REEL	REEL SIZE			SYMBOL				Unit: mm	
		8 mm TAPE WIDE	12 mm TAPE WIDE	24 mm TAPE WIDE	A	N	C	D	W ₁	W ₂ MAX.
PE0201	10,000	7" (Ø178 mm)	---	---	180.0+0/-3	60.0+1/-0	13.0±0.2	21.0±0.8	9.0±0.30	12.4
PE0402	10,000	7" (Ø178 mm)	---	---	180.0+0/-3	60.0+1/-0	13.0±0.2	21.0±0.8	9.0±0.30	12.4
PE0603	5000	7" (Ø178 mm)	--	--	180.0+0/-3	60.0+1/-0	13.0±0.2	21.0±0.8	8.4 +1/-0	12.4
PE0805	5000	7" (Ø178 mm)	--	--	180.0+0/-3	60.0+1/-0	13.0±0.2	21.0±0.8	8.4 +1/-0	12.4
PE1206	4000	7" (Ø178 mm)	--	--	180.0+0/-3	60.0+1/-0	13.0±0.2	21.0±0.8	8.4 +1/-0	12.4
PE2010	4000	-- (Ø178 mm)	7" (Ø178 mm)	--	180.0+0/-3	60.0+1/-0	13.0±0.2	21.0±0.8	12.3 +1/-0	18.4
PE2512	4000	-- (Ø178 mm)	7" (Ø178 mm)	--	180.0+0/-3	60.0+1/-0	13.0±0.2	21.0±0.8	12.3 +1/-0	18.4

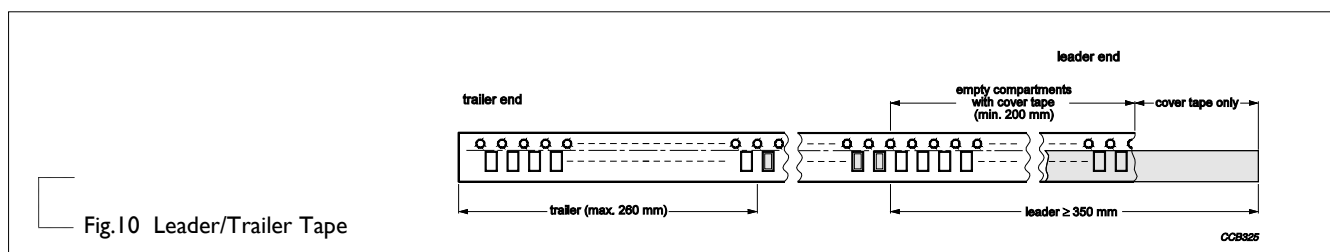LEADER/TRAILER TAPE SPECIFICATION



FOOTPRINT AND SOLDERING PROFILES

For recommended soldering profiles, please refer to data sheet “Chip resistors mounting”.

FOOTPRINT

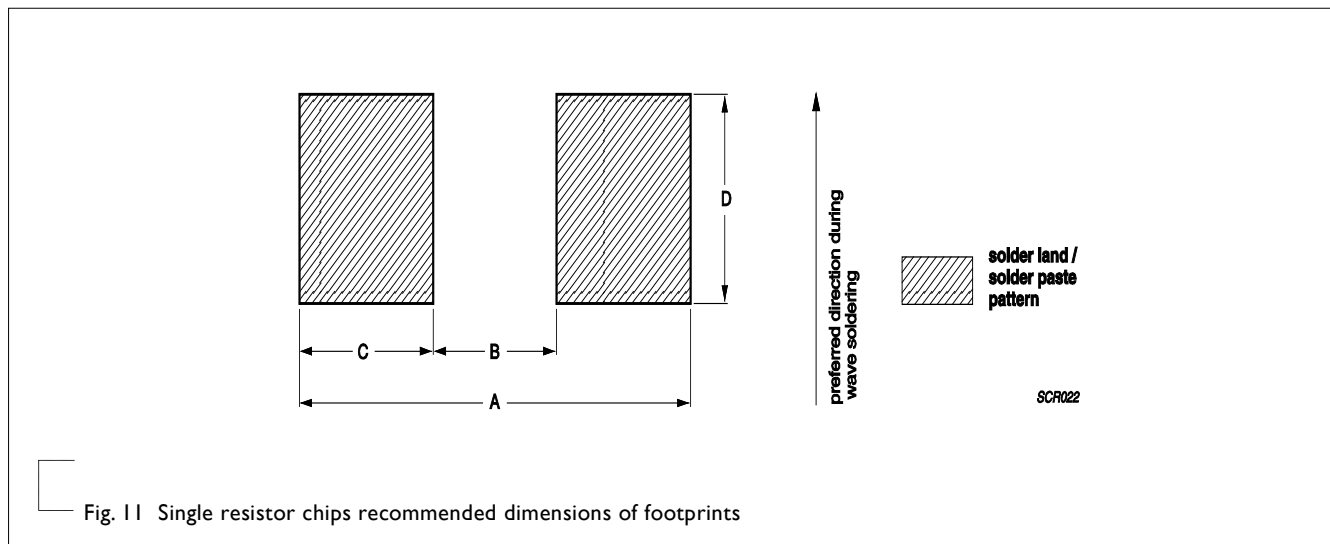


Table 7 Footprint dimensions

SIZE	RESISTANCE RANGE	Unit: mm			
		A	B	C	D
PE0201	$20\text{ m}\Omega \leq R \leq 200\text{ m}\Omega$	1.00	0.30	0.35	0.40
PE0402	$10\text{ m}\Omega \leq R \leq 910\text{ m}\Omega$	1.45	0.35	0.55	0.55
PE0603	$5\text{ m}\Omega \leq R \leq 910\text{ m}\Omega$	2.52	0.50	1.01	1.01
PE0805	$5\text{ m}\Omega \leq R \leq 910\text{ m}\Omega$	2.54	0.50	1.02	1.27
PE1206	$5\text{ m}\Omega \leq R \leq 910\text{ m}\Omega$	3.90	0.76	1.57	1.78
PE2010	$5\text{ m}\Omega \leq R \leq 6\text{ m}\Omega$	6.12	1.40	2.36	3.05
	$7\text{ m}\Omega \leq R \leq 100\text{ m}\Omega$	6.10	3.30	1.40	3.05
PE2512	$6\text{ m}\Omega$	7.40	3.18	2.11	3.68
	$7\text{ m}\Omega \leq R \leq 100\text{ m}\Omega$	7.36	4.06	1.65	3.68

TESTS AND REQUIREMENTS

Table 8 Test condition, procedure and requirements

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Life/ Operational Life/ Endurance	MIL-STD-202G-method 108 IEC 60115-1 4.25.1	1,000 hours at 70±2 °C applied RCWV 1.5 hours on, 0.5 hour off, still air required	±(1%+0.0005 Ω)
High Temperature Exposure/ Endurance at Upper Category Temperature	MIL-STD-202G-method 108 IEC 60115-1 4.25.3	1,000 hours at maximum operating temperature depending on specification, unpowered No direct impingement of forced air to the parts Tolerances: 0201/0402 155±3°C 0603 and above 170±3°C	±(1%+0.0005 Ω)
Moisture Resistance	MIL-STD-202G-method 106	Each temperature / humidity cycle is defined at 8 hours (method 106F), 3 cycles / 24 hours for 10d with 25 °C / 65 °C 95% R.H, without steps 7a & 7b, unpowered Parts mounted on test-boards, without condensation on parts Measurement at 24±2 hours after test conclusion	±(0.5%+0.0005 Ω)
Thermal Shock	MIL-STD-202G-method 107	-55/+125 °C Note: Number of cycles required is 300. Devices mounted Maximum transfer time is 20 seconds. Dwell time is 15 minutes. Air – Air	±(1%+0.0005 Ω)
Short Time Overload	IEC60115-1 4.13	5 times of rated power for 5 seconds at room temperature	±(1%+0.0005 Ω) No visible damage
Board Flex/ Bending	IEC60115-1 4.13	Device mounted on PCB test board as described, only 1 board bending required Bending for 0201: 3mm 0402 and above: 2mm Holding time: minimum 60 seconds	±(1%+0.0005 Ω) No visible damage
Biased Humidity	MIL-STD-202 Method 103	1,000 hours at 85°C/85%R.H. 10% of operating power, no condensation on the devices, circulating air.	± (1.0 % + 0.0005Ω)

TEST	TEST METHOD	PROCEDURE	REQUIREMENTS
Solderability			
- Wetting	IPC/JEDECJ-STD-002B test B	Electrical Test not required Magnification 50X SMD conditions: 1 st step: method B, aging 4 hours at 155 °C dry heat 2 nd step: leadfree solder bath at 245±3 °C Dipping time: 3±0.5 seconds	Well tinned (≥95% covered) No visible damage
- Leaching	IPC/JEDECJ-STD-002B test D	Leadfree solder, 260 °C, 30 seconds immersion time	No visible damage
- Resistance to Soldering Heat	MIL-STD-202G-method 210F IEC 60115-1 4.18	Condition B, no pre-heat of samples Leadfree solder, 260 °C, 10 seconds immersion time Procedure 2 for SMD: devices fluxed and cleaned with isopropanol	±(0.5%+0.0005 Ω) No visible damage

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 2	Apr. 20, 2015		- Extend resistor value
Version 1	Mar. 04, 2015		- Update TCR and operating temperature
Version 0	Feb. 10, 2015	-	- New datasheet for current sensor - low TCR PE series sizes of 0201/0402/0603/0805/1206/2010/2512, 0.5%, 1%, and 5%

“Yageo reserves all the rights for revising the content of this datasheet without further notification, as long as the products itself are unchanged. Any product change will be announced by PCN.”

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

YAGEO:

[PE1206DRF470R006L](#) [PE1206DRF470R007L](#) [PE1206DRF470R008L](#) [PE1206DRF7W0R005L](#)
[PE1206DRF7W0R006L](#) [PE1206DRF7W0R007L](#) [PE1206DRF7W0R008L](#) [PE1206DRM470R006L](#)
[PE1206DRM470R007L](#) [PE1206DRM470R008L](#) [PE1206DRM7W0R005L](#) [PE1206DRM7W0R006L](#)
[PE1206DRM7W0R007L](#) [PE1206DRM7W0R008L](#) [PE1206JRF470R006L](#) [PE1206JRF470R007L](#)
[PE1206JRF470R008L](#) [PE1206JRM470R006L](#) [PE1206JRM470R007L](#) [PE1206JRM470R008L](#) [PE2010DKE070R005L](#)
[PE2010DKE7W0R005L](#) [PE2010DKF070R005L](#) [PE2010DKF7W0R005L](#) [PE2010DKM070R005L](#)
[PE2010DKM7W0R005L](#) [PE2512DKE070R006L](#) [PE2512DKE070R007L](#) [PE2512DKE070R009L](#)
[PE2512DKE7W0R006L](#) [PE2512DKE7W0R007L](#) [PE2512DKE7W0R008L](#) [PE2512DKE7W0R009L](#)
[PE2512DKF070R006L](#) [PE2512DKF070R007L](#) [PE2512DKF070R009L](#) [PE2512DKF7W0R006L](#)
[PE2512DKF7W0R007L](#) [PE2512DKF7W0R008L](#) [PE2512DKF7W0R009L](#) [PE2512DKM070R006L](#)
[PE2512DKM070R007L](#) [PE2512DKM070R009L](#) [PE2512DKM7W0R006L](#) [PE2512DKM7W0R007L](#)
[PE2512DKM7W0R008L](#) [PE2512DKM7W0R009L](#) [PE2512JKE7W0R008L](#) [PE2512JKE7W0R009L](#)
[PE2512JKF7W0R008L](#) [PE2512JKF7W0R009L](#) [PE2512JKM7W0R008L](#) [PE2512JKM7W0R009L](#)