

Description: 1005 Band Pass Filter

PART NUMBER: BPF1005LRPKR3750A

Features:

Compact size

RoHS compliant

Applications:

WWAN

• 5GNR-n77

ELECTRICAL SPECIFICATIONS

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Insertion loss (dB)	3300~3800	-	1.42	1.5
Insertion loss (dB)	3800~4200	-	1.07	1.5
Insertion loss (dB)	3300~3800	-	-	1.7
at -40~85°C	3800~4200	-	-	1.7
Potura loca (dP)	3300~3800	16	18.39	-
Return loss (dB)	3800~4200	15	15.90	-
	600~1970	35	44.8	-
	1980~2120	35	40.3	-
	2130~2200	35	37.6	-
Attonuation (dP)	2300~2690	30	32.5	-
Attenuation (dB)	5150~5850	20	23.9	-
	5850~6600	20	24.5	-
	6600~8400	20	28.7	-
	9900~13000	20	30.2	-

Operating Temperature Range: -40~85°C

Power Capacity: 3W max.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:




Description: 1005 Band Pass Filter

PART NUMBER: BPF1005LRPKR3750A

MECHANICAL DIMENSION

Outline




Dimension

L	W	Т	а	
1.00±0.05	0.50±0.05	0.42 Max.	0.18±0.05	
b	С	d	р	
0.125±0.05	0.18±0.05	0.15±0.05	0.36±0.05	
D1-D2	D3-D4			
0±0.04	0±0.04			


NOTE: Dimensions in mm.


D1		Îd	
D2† D3	a	□	Bottom View



Terminal name	Function		
1	NC		
2	GND		
3	NC		
4	Output		
5	GND		
6	Input		

Reference design of EVB

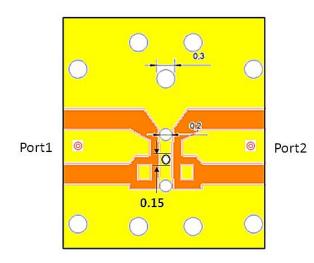

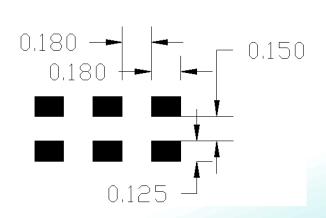

Unit: mm

[®] Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: 1005 Band Pass Filter


PART NUMBER: BPF1005LRPKR3750A

MEASURING DIAGRAM



Test Instrument : Agilent E5071C Network Analyzer or equivalent.

ELECTRICAL PERFORMANCES

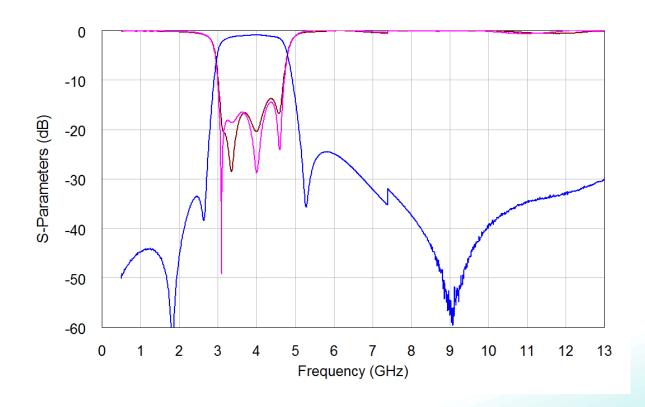



Description: 1005 Band Pass Filter

PART NUMBER: BPF1005LRPKR3750A

BASE TAPE


PACKING SPECIFICATION

Peel-off force



The force for peeling of cover tape is 10 grams in the arrow direction.


Dimension (Unit: mm)



TYPE	Α	В	С	D	E	F
8 mm	178±1	60+0.5 -0	-	13±0.2	9±0.5	12±0.5
12 mm	178±0.3	60±0.2	19.3±0.1	13.5±0.1	13.6±0.1	-

Taping quantity

SERIES	5824 5724	5320 5220	4532	4516	3225	3216 2520	2012 1608	1005 0605
PCS/Reel	5000	3000	1000	2000	2500	3000	4000	10000

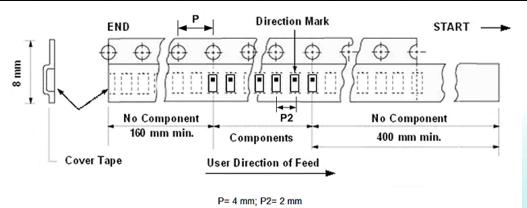





Description: 1005 Band Pass Filter

PART NUMBER: BPF1005LRPKR3750A

RE\	/ISI	ION	HIS	TORY

RevisionDateDescriptionVersion 1Dec. 27, 2022- New issue

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

BPF1005LRPKR3750A