

Description: 1005 Band Pass Filter

PART NUMBER: BPF1005LRQYR3750A

Features:

Applications:

Compact size

WWAN

· RoHS compliant

• 5GNR-n77

ELECTRICAL SPECIFICATIONS

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Insertion loss (dB)	3300~4200	-	1.55	1.8
Insertion loss (dB) at -40~85°C	3300~4200	-	-	2.0
Return loss (dB)	3300~4200	14	16.78	-
	600~1610	40	43.05	-
	1710~1785	38	47.95	-
	1805~2200	30	51.15	-
	2300~2620	25	35.54	-
	2620~2690	20	25.81	-
Attenuation (dB)	5150~5850	20	30.25	-
	5850~6600	28	30.22	-
	6600~7600	30	34.63	-
	7600~8400	30	44.34	-
	9900~12600	20	27.53	-
	13200~18000	10(Ref.)	22.03	-

Operating Temperature Range: -40~85°C

Power Capacity: 3W max.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:




Description: 1005 Band Pass Filter

PART NUMBER: BPF1005LRQYR3750A

MECHANICAL DIMENSION

Outline



Dimension

L	W	Т	а	
1.00±0.05	.00±0.05 0.50±0.05		0.18±0.05	
b	С	d	р	
0.125±0.05	0.18±0.05	0.15±0.05	0.36±0.05	


NOTE: Dimensions in mm.


<mark>← P</mark>	, · →	
	1 d Botton	n View
	□ ↓ b	
	da de colo	

<u>Ter</u>	minatior	<u>)</u>
	Top View	
(6)	(5)	(4)
(1)	(2)	(3)

Terminal name	Function
1	Input/Output
2	GND
3	Input/Output
4	NC
5	GND
6	NC

Reference design of EVB

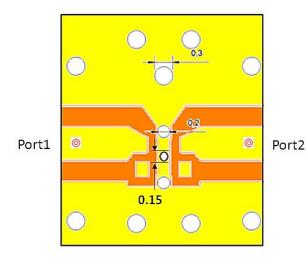

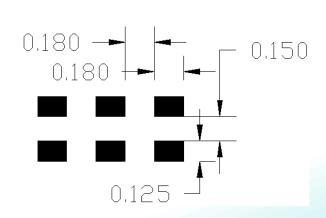

Unit: mm

[®] Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: 1005 Band Pass Filter


PART NUMBER: BPF1005LRQYR3750A

RECOMMENDED PCB LAYOUT



Test Instrument:
Agilent E5071C Network Analyzer or equivalent.

ELECTRICAL PERFORMANCES

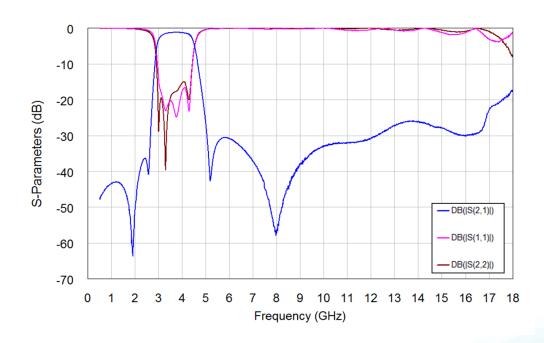





Description: 1005 Band Pass Filter

PART NUMBER: BPF1005LRQYR3750A

PACKING SPECIFICATION


Peel-off force

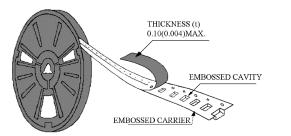

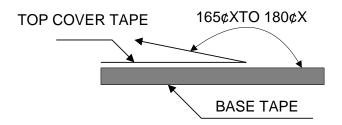

The force for peeling of cover tape is 10 grams in the arrow direction.


Dimension (Unit: mm)



TYPE	A	В	С	D	E	F
8 mm	178±1	60+0.5 -0	-	13±0.2	9±0.5	12±0.5
12 mm	178±0.3	60±0.2	19.3±0.1	13.5±0.1	13.6±0.1	-

Taping quantity

SERIES	5824 5724	5320 5220	4532	4516	3225	3216 2520	2012 1608	1005 0605
PCS/Reel	5000	3000	1000	2000	2500	3000	4000	10000

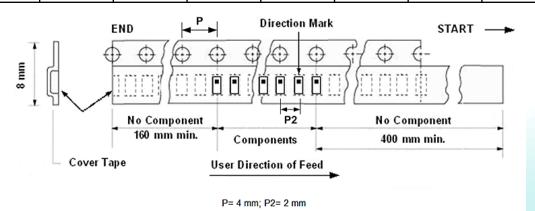





Description: 1005 Band Pass Filter

PART NUMBER: BPF1005LRQYR3750A

		REVISION HISTORY
Revision	Date	Description
Version 1	Feb. 13, 2023	- New issue
Version 1	Mar. 10, 2023	 Updated tolerance mark.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

BPF1005LRQYR3750A