




0970 PSL 117



Profibus I/O Modules with 8-Digital Inputs and 4-Digital Outputs

8 IN / 4 OUT

Profibus-DP device with 8 digital inputs to connect standard sensors and 4 digital outputs to connect standard actuators, combined M12 socket, rotary switches for addressing, M12 bus connection, 7/8" actuator supply.

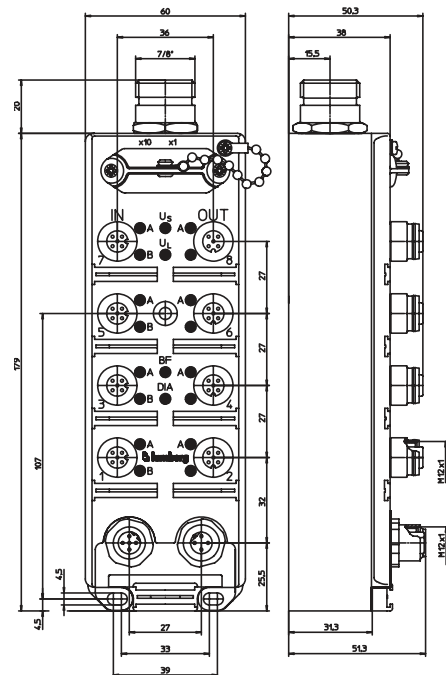

Bit Assignment

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	7B	5B	3B	1B	7A	5A	3A	1A
M12 Output								
Byte 0	-	-	-	-	8	6	4	2
Diagnostic								
DIA-Byte	-	UVA	ASC	OVL	-	-	-	-

UVA: Undervoltage actuator
ASC: Actuator short-circuit
OVL: Overload status

Diagnostic Indication

LED	Indication	Condition
1, 3, 5, 7 A/B 2, 4, 6, 8 A	yellow	channel status
2, 4, 6, 8	red	actuator short-circuit
Us	green	actuator supply active
UL	green	module electronic supply active
BF	red	bus error
DIA	red	module diagnostics (sensor short-circuit / sensor overload / actuator low voltage / actuator short-circuit / actuator overload)

Pin Assignment

Bus connection M12	Actuator supply 7/8"	Input/Output M12
1 = +5 V¹ 2 = Line A 3 = GND¹ 4 = Line B 5 = earth	1 = 0 V² 2 = 0 V³ 3 = earth 4 = +24 V³ 5 = +24 V² housing = n.c.	1 = +24 V 2 = IN B 3 = GND (0 V) 4 = IN A 5 = earth
1 = n.c. 2 = n.c. 3 = GND (0 V) 4 = OUT 5 = earth 1 = internal signals 2 = actuators 3 = system		



Be Certain with Belden

Profibus I/O Modules with 8-Digital Inputs and 4-Digital Outputs

0970 PSL 117

Technical Data

Environmental

Degree of protection	IP 67
Operating temperature range	-0°C (+32°F) to +60°C (+140°F)

Mechanical

Weight	535 g
Housing material	PUR

Bus system

ID number	0450 hex
GSD file	Lum_0450.gsd
Transmission rate	max. 12 MBaud
Address range	1–126 dec
Rotary address switches	1–99 dec
Default address	99 dec

Electronics power supply

Rated voltage	24 V DC
Voltage range	19–28.8 V DC
Power consumption	typ. 60 mA
Reverse polarity protection	yes
Indication	LED green

Input power supply

Voltage range	min. (UL - 1.5 V)
Total current of all sensors	max. 800 mA
Short circuit-proof	yes

Inputs

Rated input voltage	24 V DC
Signal state "1"	11–30 V
Signal state "0"	-3–5 V
Input current at 24V	typ. 6 mA
Channel type N.O.	p-switching
Number of digital channels	8
Channel status indicator	LED yellow per channel

Output power supply

Rated voltage	24 V DC
Voltage range	19–30 V DC
Potential separation	present
Reverse polarity protection	yes/antiparallel diode
Indication	LED green

Outputs

Rated output current	2 A per channel
Short circuit-proof	yes
Max. output current	8 A per module
Overload-proof	yes
Number of digital channels	4
Channel type N.O.	p-switching
Channel status indicator	LED yellow per channel
Diagnostic indication	LED red per channel

Included in delivery/accessories

Dust covers M12	2 pieces
Attachable labels	10 pieces

Us

Rated voltage	24 V DC
Voltage range	19–30 V DC
Potential separation	present
Reverse polarity protection	yes/antiparallel diode
Indication	LED green

Type 2 A acc. to IEC 61131-2

Rated output current	2 A per channel
Short circuit-proof	yes
Max. output current	8 A per module
Overload-proof	yes
Number of digital channels	4
Channel type N.O.	p-switching
Channel status indicator	LED yellow per channel
Diagnostic indication	LED red per channel

Part Number

0970 PSL 117



The application of these products in harsh environments should always be checked before use.
Specifications subject to alteration.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lumberg Automation:](#)

[0970 PSL 117](#)