

Features


Unregulated Converters

- 2W single and dual outputs in DIP14
- 3kVDC/1s or 4kVDC/1s isolation
- Optional continuous short circuit protection
- UL94 V-0 package material
- Efficiency up to 85%
- Suitable for IGBT applications

RECOM
DC/DC Converter

RJZ & RGZ

**2 Watt
DIP14
Single and Dual
Output**

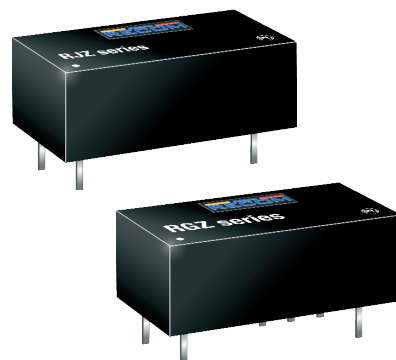

UL [®] (8)
E358085



IEC/EN62368-1 certified
IEC/EN60950-1 certified
UL/CSA 60950-1 certified (8)

PREFERRED ALTERNATIVES

For new medical applications:

REM3.5E



Description

The RJZ and RGZ series converters are available in DIP14 packages, so can be used for applications where component height is restricted. The wide selection of input voltage and output voltage options plus an I/O-Isolation of 3kVDC or 4kVDC as standard makes these converters suitable for many industrial and IGBT applications.

Selection Guide


Part Number	nom. Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. ⁽¹⁾ [%]	max. Capacitive Load ⁽²⁾ [μF]
RJZ-xx3.3S ^(3,4)	3.3, 5, 9, 12, 15, 24	3.3	606	70-75	3300
RJZ-xx05S ^(3,4)	3.3, 5, 9, 12, 15, 24	5	400	78-85	1200
RJZ-xx09S ^(3,4)	3.3, 5, 9, 12, 15, 24	9	222	78-84	1200
RJZ-xx12S ^(3,4)	3.3, 5, 9, 12, 15, 24	12	166	80-85	680
RJZ-xx15S ^(3,4)	3.3, 5, 9, 12, 15, 24	15	133	82-85	680
RJZ-xx24S ^(3,4)	3.3, 5, 9, 12, 15, 24	24	83	80-85	220
RGZ-xx3.3D ^(3,4)	3.3, 5, 9, 12, 15, 24	±3.3	±303	75	±1500
RGZ-xx05D ^(3,4)	3.3, 5, 9, 12, 15, 24	±5	±200	75-82	±470
RGZ-xx09D ^(3,4)	3.3, 5, 9, 12, 15, 24	±9	±111	75-80	±470
RGZ-xx12D ^(3,4)	3.3, 5, 9, 12, 15, 24	±12	±84	78-82	±220
RGZ-xx15D ^(3,4)	3.3, 5, 9, 12, 15, 24	±15	±66	80-84	±220
RGZ-xx24D ^(3,4)	3.3, 5, 9, 12, 15, 24	±24	±42	82-84	±100
RGZ-xx1509D ^(3,4)	5, 12, 24	+15/-9	+67/-111	70-81	±330

Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient

Note2: Max Cap Load is tested at nominal input and full resistive load and is defined as the capacitive load that will allow start up in under 1s without damage to the converter

Model Numbering

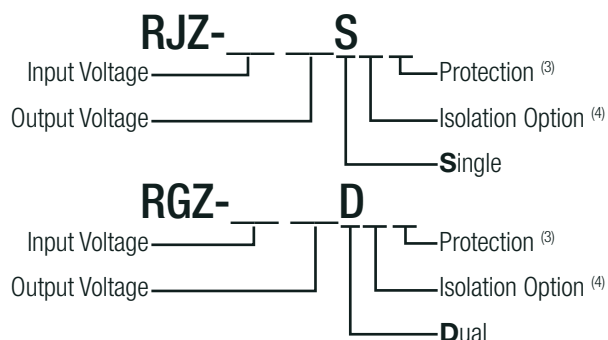

Notes:

Note3: standard part is without continuous short circuit protection
add suffix „/P“ for continuous short circuit protection

Note4: add suffix „/H“ for 4kVDC/1s isolation
or add suffix „/HP“ for continuous short circuit protection and 4kVDC/1s isolation

Ordering Examples

RJZ-1212S = 12V Input, 12V Output, Single

RJZ-0505S/P = 5V Input, 5V Output, Single, continuous short circuit protection

RGZ-0505D/HP = 5V Input, 5V Output, Dual, 4kVDC/1s isolation and continuous short circuit protection


Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS


Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range			±10%	
Minimum Load		0%		
Internal Operating Frequency	RGZ-xx1509D	20kHz 20kHz	50kHz 45kHz	90kHz
Output Ripple and Noise	20MHz BW			150mVp-p

Efficiency vs. Load


RJZ-xx05S

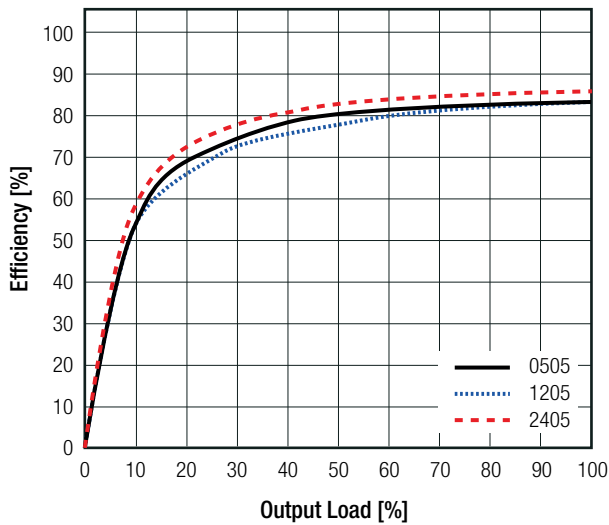


RJZ-xx09S

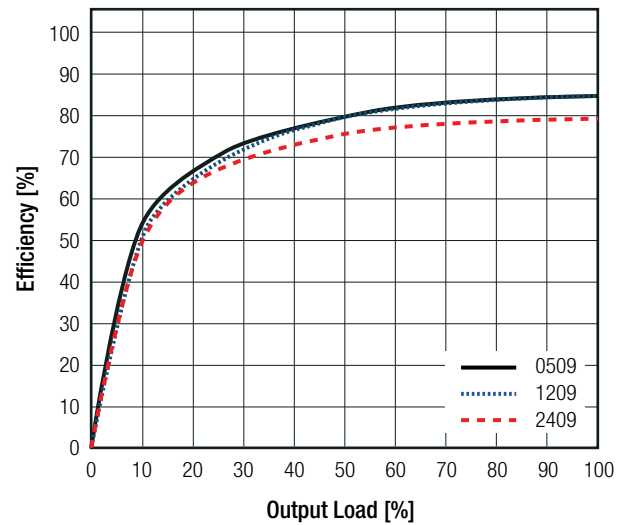

RJZ-xx12S

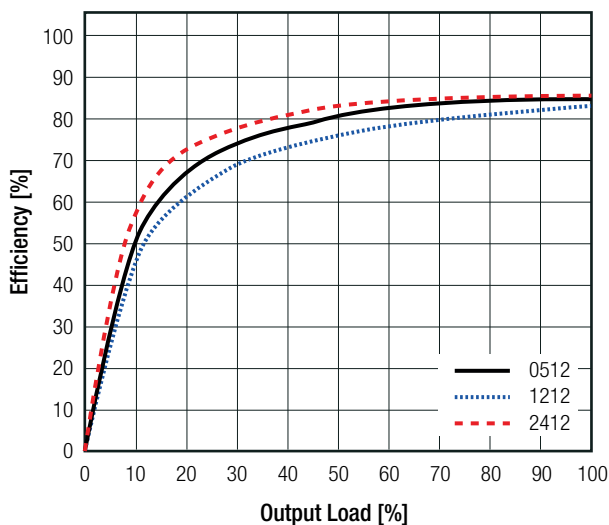




RJZ-xx15S

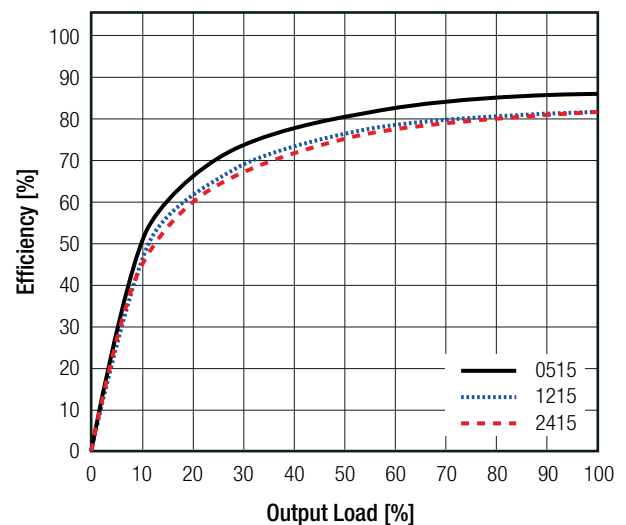

continued on next page

Specifications (measured @ $T_a = 25^\circ\text{C}$, nom. V_{in} , full load and after warm-up unless otherwise stated)

Efficiency vs. Load

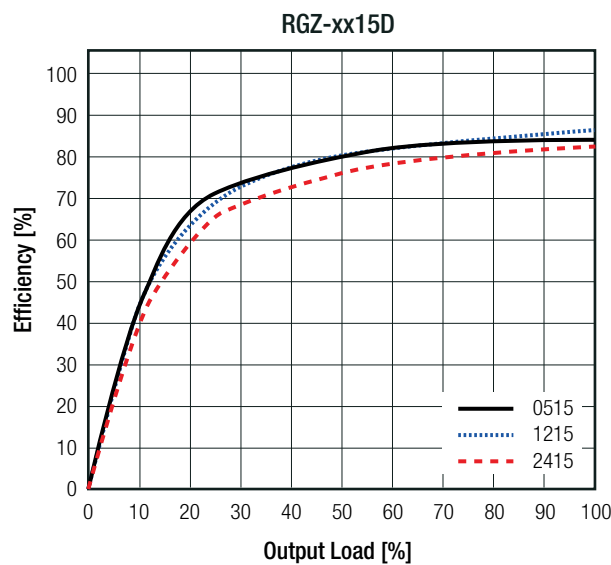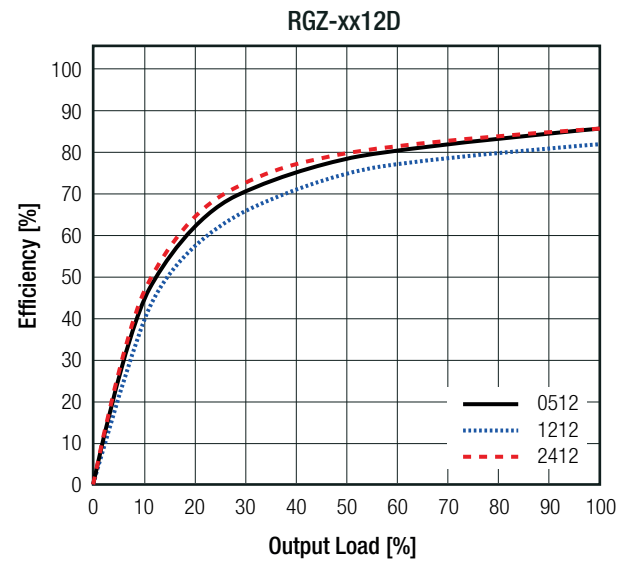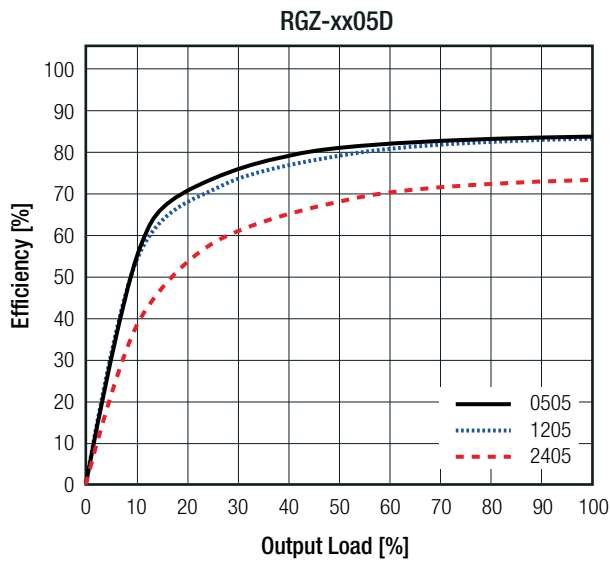

REGULATIONS

Parameter	Condition		Value
Output Accuracy			$\pm 5.0\%$ max.
Line Regulation	low line to high line		$\pm 1.2\%$ of $1.0\% V_{in}$ typ.
Load Regulation ⁽⁵⁾	10% to 100% load	3.3Vout	20.0% max.
		5Vout	15.0% max.
		9, 12, 15, 24 and +15/-9Vout	10.0% max.







Notes:

Note5: Operation below 10% load will not harm the converter, but specifications may not be met

continued on next page

Specifications (measured @ $T_a = 25^\circ\text{C}$, nom. V_{in} , full load and after warm-up unless otherwise stated)


Deviation vs. Load

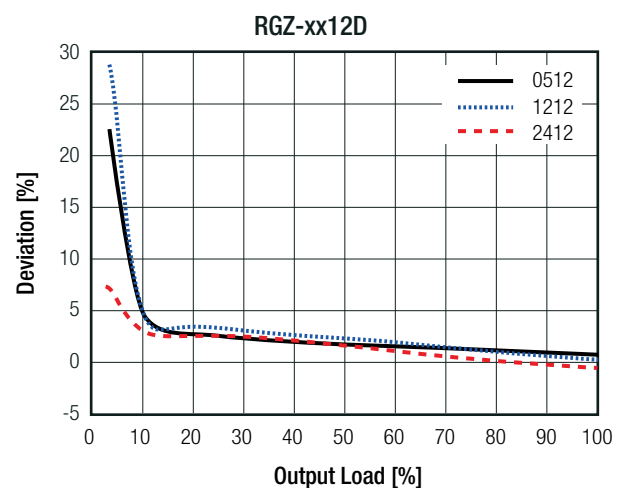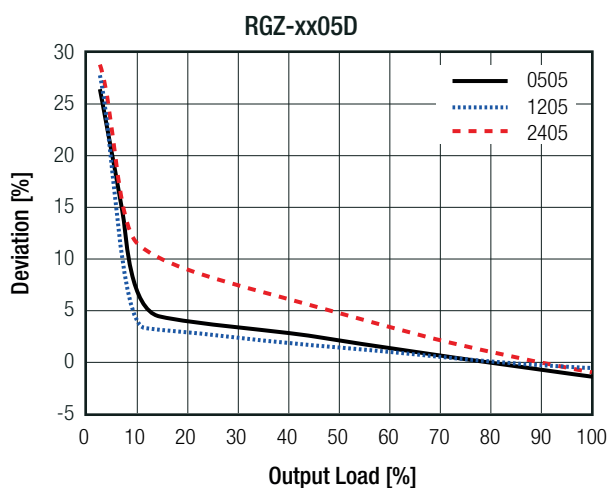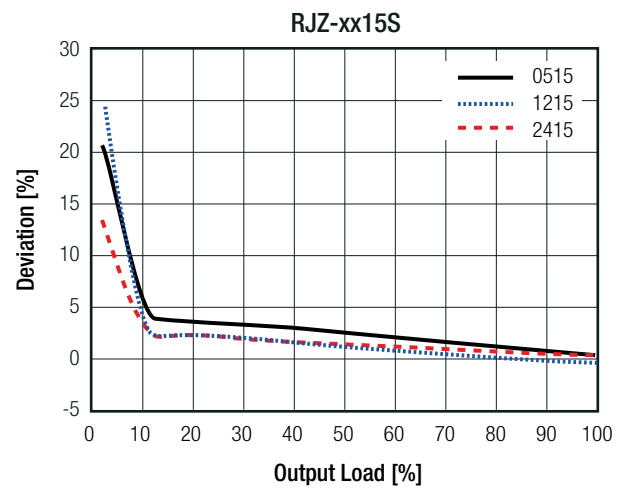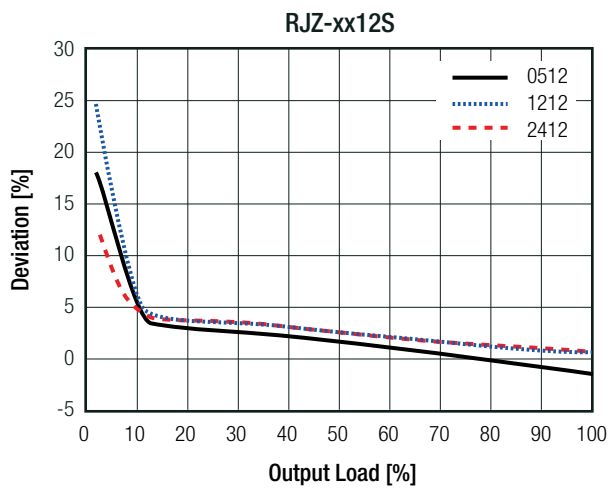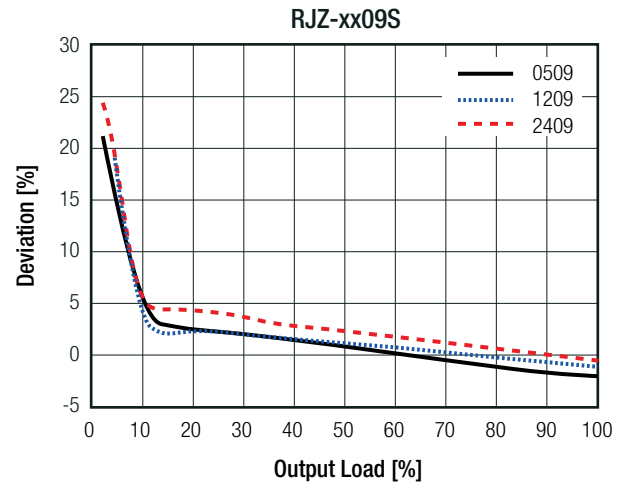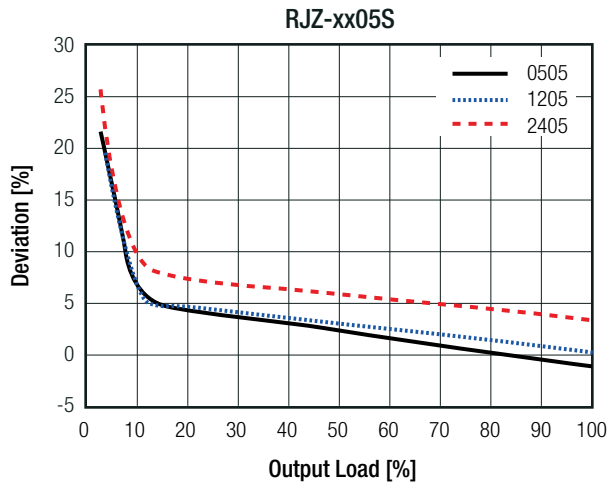

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Deviation vs. Load

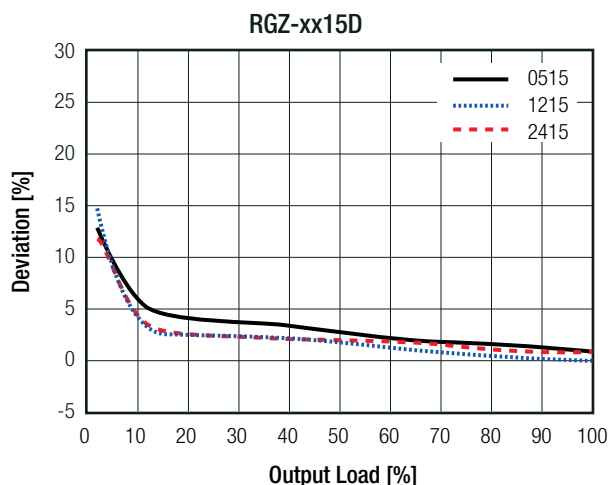

PROTECTIONS

Parameter	Type			Value
Short Circuit Protection (SCP)	without suffix with suffix "/P"			1 second continuous
Isolation Voltage ⁽⁶⁾	I/P to O/P	without suffix	tested for 1 second rated for 1 minute	3kVDC 1.5kVAC/60Hz
		with suffix "/H"	tested for 1 second rated for 1 minute	4kVDC 2kVAC/60Hz
Isolation Resistance				15GΩ min.
Isolation Capacitance				120pF max.
Insulation Grade	according to 60950-1			basic

Notes:

Note6: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note7: Refer to local safety regulations if input over-current protection is required. Recommended fuse: slow blow type


ENVIRONMENTAL

Parameter	Condition			Value
Operating Temperature Range	full load @ free air convection (see graph)			-40°C to +90°C
Maximum Case Temperature				+110°C
Temperature Coefficient				±0.02%/K
Thermal Impedance	0.1m/s, horizontal			56.66K/W
Operating Altitude	according to 60950-1			2000m
	according to 62368-1			5000m
Operating Humidity	non-condensing			95% RH max.
Pollution Degree				PD2
MTBF	according to MIL-HDBK-217F, G.B.	RJZ	+25°C	893 x 10 ³ hours
			+85°C	208 x 10 ³ hours
		RGZ	+25°C	810 x 10 ³ hours
			+85°C	151 x 10 ³ hours

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Derating Graph
(@ free air convection)


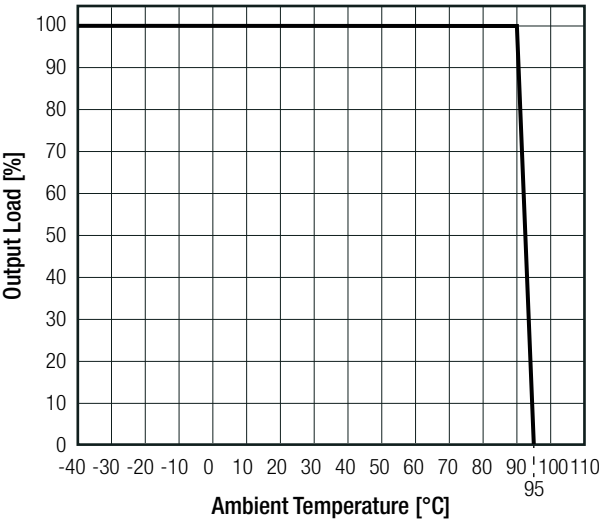


SAFETY AND CERTIFICATIONS		
Certificate Type (Safety)	Report / File Number	Standard
Audio/video, information and communication technology equipment. Safety requirements	SPCLVD2010040	IEC62368-1:2018 EN IEC 62368-1:2020 + A11:2020
Information Technology Equipment, General Requirements for Safety	SPCLVD1602031	IEC60950-1:2005, 2nd Edition + A2:2013 EN60950-1:2006 + A2:2013
Information Technology Equipment, General Requirements for Safety	E358085 ⁽⁸⁾	UL60950-1, 2nd Edition, 2007 CAN/CSA C22.2 NO. 60950-1, 2nd Edition, 2007
Medical electrical equipment Part 1: General requirements for basic safety and essential performance	SPC1007090 ⁽⁹⁾	IEC 60601-1:1988 + A2:1995 EN 60601-1:1990 + A13 :1996
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS2		RoHS-2011/65/EU + AM-2015/863
Notes: Note8: only +15/-9 version Note9: excluded +15/-9 version		

DIMENSION AND PHYSICAL CHARACTERISTICS		
Parameter	Type	Value
Material	case potting PCB	non-conductive black plastic (UL94 V-0) epoxy, (UL94 V-0) FR4, (UL94 V-0)
Dimension (LxWxH)		19.9 x 10.0 x 7.1mm
Weight		2.8g typ.
continued on next page		

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Dimension Drawing (mm)

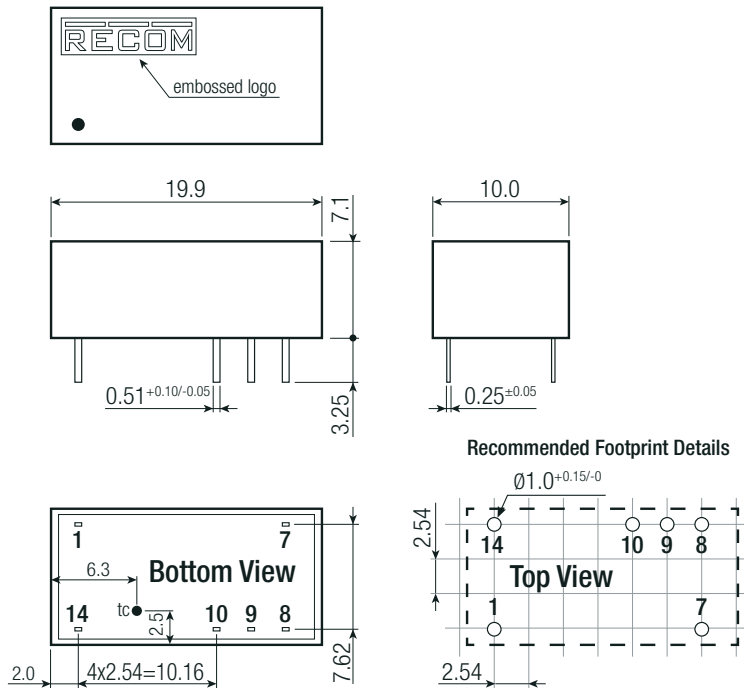

Pinning Information

Pin #	RJZ	RGZ
1	-Vin	-Vin
7	NC	NC
8	+Vout	+Vout
9	no pin	Com
10	-Vout	-Vout
14	+Vin	+Vin


NC= No Connection

Tolerance: xx.x= ±0.5mm

xx.xx= ±0.25mm

INSTALLATION AND APPLICATION

IGBT Application Circuit

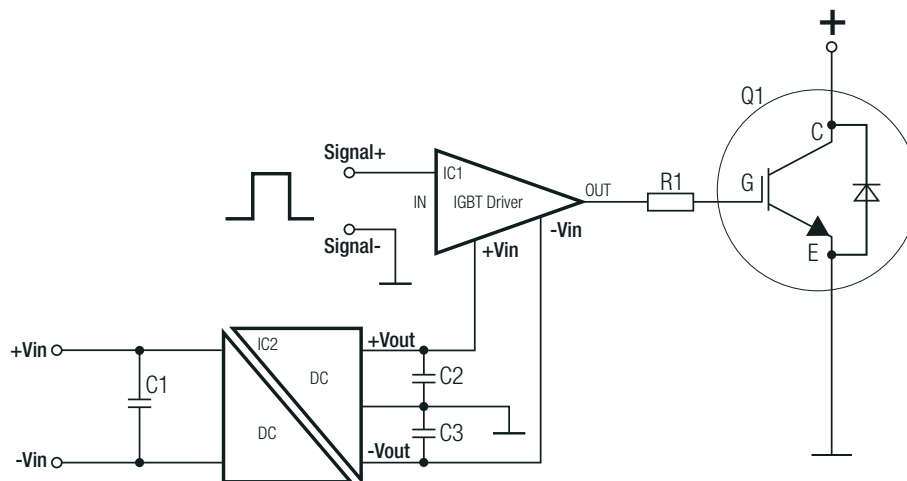

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	520.0 x 17.0 x 10.0mm
Packaging Quantity	tube	24pcs
Storage Temperature Range		-55°C to +125°C
Storage Humidity	non-condensing	95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RECOM:](#)

[RJZ-1505S/H](#) [RJZ-1505S/HP](#) [RJZ-1505S/P](#) [RJZ-1509S](#) [RJZ-1509S/H](#) [RJZ-1509S/HP](#) [RJZ-1509S/P](#) [RJZ-1512S](#)
[RJZ-1512S/H](#) [RJZ-1512S/HP](#) [RJZ-1512S/P](#) [RJZ-1515S](#) [RJZ-1515S/H](#) [RJZ-1515S/HP](#) [RJZ-1515S/P](#) [RJZ-1524S](#)
[RJZ-1524S/H](#) [RJZ-1524S/HP](#) [RJZ-1524S/P](#) [RJZ-153.3S](#) [RJZ-153.3S/H](#) [RJZ-153.3S/HP](#) [RJZ-153.3S/P](#) [RJZ-2405S](#)
[RJZ-2405S/H](#) [RJZ-2405S/HP](#) [RJZ-2405S/P](#) [RJZ-2409S](#) [RJZ-2409S/H](#) [RJZ-2409S/HP](#) [RJZ-2409S/P](#) [RJZ-2412S](#)
[RJZ-2412S/H](#) [RJZ-2412S/HP](#) [RJZ-2412S/P](#) [RJZ-2415S](#) [RJZ-2415S/H](#) [RJZ-2415S/HP](#) [RJZ-2415S/P](#) [RJZ-2424S](#)
[RJZ-2424S/H](#) [RJZ-2424S/HP](#) [RJZ-2424S/P](#) [RJZ-243.3S](#) [RJZ-243.3S/H](#) [RJZ-243.3S/HP](#) [RJZ-243.3S/P](#) [RGZ-0505D](#)
[RGZ-0505D/H](#) [RGZ-0505D/HP](#) [RGZ-0505D/P](#) [RGZ-0509D](#) [RGZ-0509D/H](#) [RGZ-0509D/HP](#) [RGZ-0509D/P](#) [RGZ-](#)
[0512D](#) [RGZ-0512D/H](#) [RGZ-0512D/HP](#) [RGZ-0512D/P](#) [RGZ-0515D](#) [RGZ-0515D/H](#) [RGZ-0515D/HP](#) [RGZ-0515D/P](#)
[RGZ-0524D](#) [RGZ-0524D/H](#) [RGZ-0524D/HP](#) [RGZ-0524D/P](#) [RGZ-053.3D](#) [RGZ-053.3D/H](#) [RGZ-053.3D/HP](#) [RGZ-](#)
[053.3D/P](#) [RGZ-0905D](#) [RGZ-0905D/H](#) [RGZ-0905D/HP](#) [RGZ-0905D/P](#) [RGZ-0909D](#) [RGZ-0909D/H](#) [RGZ-0909D/HP](#)
[RGZ-0909D/P](#) [RGZ-0912D](#) [RGZ-0912D/H](#) [RGZ-0912D/HP](#) [RGZ-0912D/P](#) [RGZ-0915D](#) [RGZ-0915D/H](#) [RGZ-](#)
[0915D/HP](#) [RGZ-0915D/P](#) [RGZ-0924D](#) [RGZ-0924D/H](#) [RGZ-0924D/HP](#) [RGZ-0924D/P](#) [RGZ-093.3D](#) [RGZ-093.3D/H](#)
[RGZ-093.3D/HP](#) [RGZ-093.3D/P](#) [RGZ-1205D](#) [RGZ-1205D/H](#) [RGZ-1205D/HP](#) [RGZ-1205D/P](#) [RGZ-1209D](#)