


STRAIGHT 2 HOLES FLANGE FLOATING JACK

SOLDER TYPE FOR CABLE .141


R128.295.727

Series : **BMA-COM**

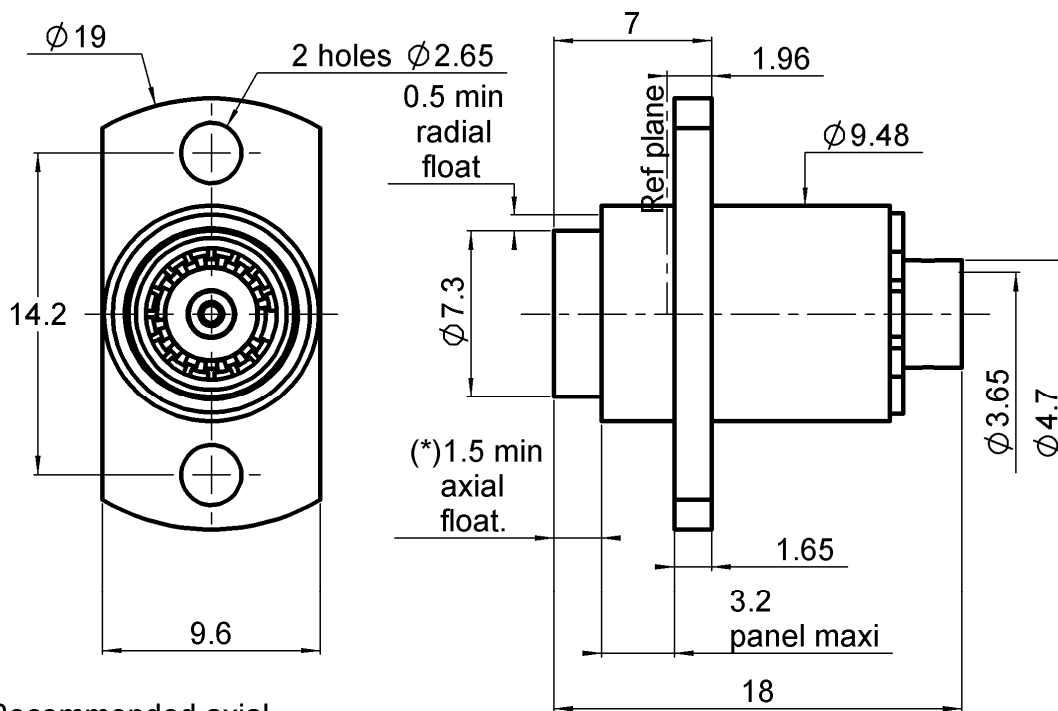


(*) Recommended axial float mount for best electrical performance:
0.51 +/- 0.25 mm
(.020" +/- .010)


PANEL DRILLING

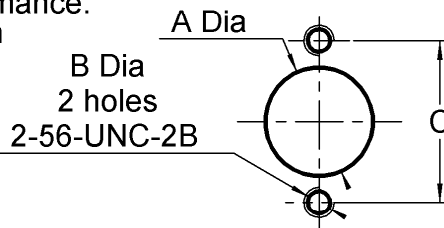

	maxi	mini
A	9.6	9.55
C	14.3	14.1



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	BBR2
CENTER CONTACT	BERYLLIUM COPPER	NPGR
OUTER CONTACT	BERYLLIUM COPPER	NPGR
INSULATOR	PTFE	
GASKET	-	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 0941 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL

STRAIGHT 2 HOLES FLANGE FLOATING JACK**R128.295.727****SOLDER TYPE FOR CABLE .141****Series : BMA-COM****PACKAGING**

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-22	GHz
VSWR	1.05 + 0,0100	x F(GHz) Maxi
Insertion loss	0.03	\sqrt{F} (GHz) dB Maxi
RF leakage	- (90	- F(GHz)) dB Maxi
Voltage rating	350	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	18 N mini
Axial force – Opposite end	18 N mini
Torque	NA N.cm mini

Recommended torque	
Mating	N.cm
Panel nut	NA N.cm
Clamp nut	NA N.cm
A/F clamp nut	0,0000 mm

Mating life	1000 Cycles mini
Weight	4,7100 g

ENVIRONMENTAL

Operating temperature	-40/+100 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	*IP54

SPECIFICATION**CABLE ASSEMBLY**

Stripping	a	b	c	d	e	f
mm	2,16	0,00	0,00	0,00	0,00	0,00

Assembly instruction :

Recommended cable(s)

RG 402

KS 2

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	272 N mini
- torque	NA N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.053.000	STRIPPING TOOL	
R282.066.000	POINTER GAUGE	
R282.740.000	SOLDERING MOUNTING	
R282.860.130	SOLDER POSITIONER BMA	

OTHER CHARACTERISTICS

* Mated with waterproof male connector



It is recommended to use a service loop to facilitate the float features of the connector

Issue : 0941 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




STRAIGHT 2 HOLES FLANGE FLOATING JACK
SOLDER TYPE FOR CABLE .141

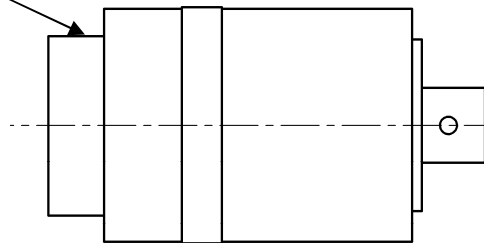R128.295.727Series : **BMA-COM****COMPONENT****BODY****STRIPPING DIMENSION**


We recommend a cable thermal preconditioning before assembly

1

- Strip the cable with the cable stripping tool.
- Trim the cable inner conductor with the trimmer.
- Clean the cable

**2**

- Introduce the cable into the body until contact with the body shoulder..
 - Place the sub-assembly on assembly jig with positioner and tighten it.
 - Solder body on the cable.
 - Let assembly cool down before removing it from the jig.
- Clean the solder area.

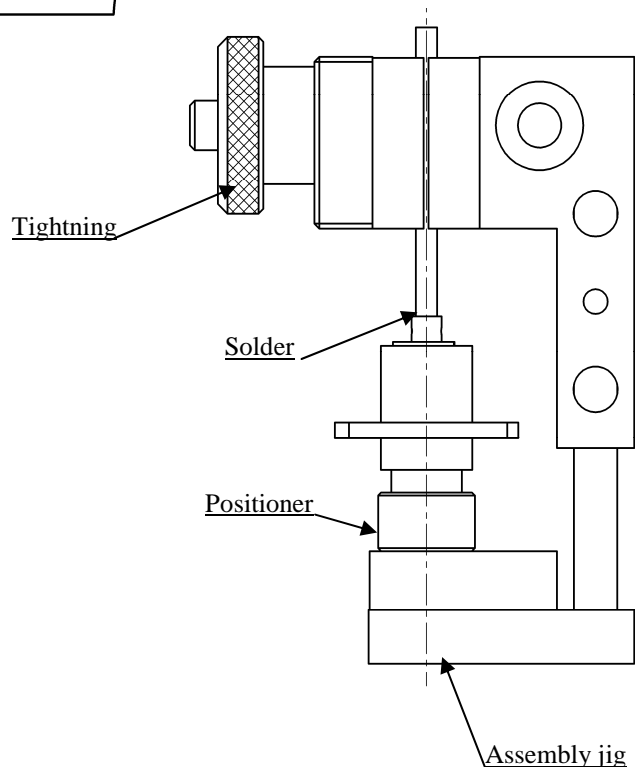**Issue : 0941 B**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R128295727W](#)