
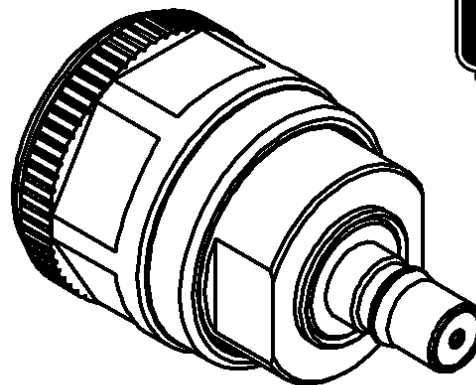



N MALE - QMA FEMALE STRAIGHT ADAPTER

R191.762.000

Série : ADAPT

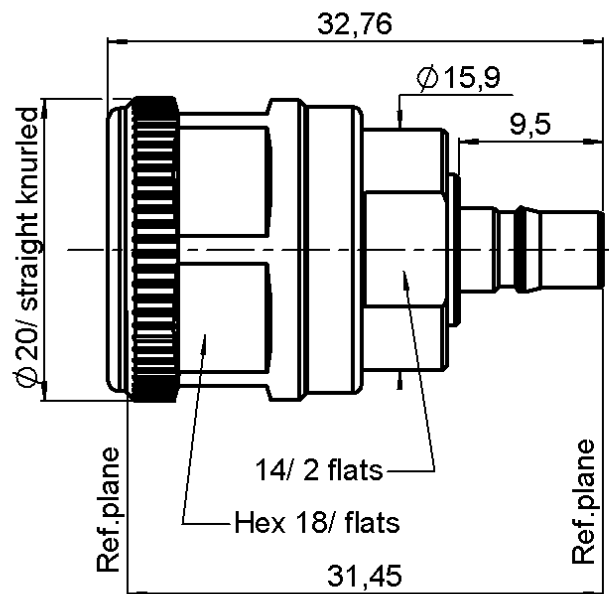

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	BBR 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER COPPER 2.5
OUTER CONTACT	BRASS	BBR 2
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 0633 A

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.



N MALE - QMA FEMALE STRAIGHT ADAPTER**R191.762.000**

Série : ADAPT

PACKAGING

Standard	Unit	Other
Unitaire	-	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	1.3 + 0,0000	x F(GHz) Maxi
Insertion loss	0.06	√F(GHz) dB Maxi
RF leakage	- (*80	- F(GHz)) dB Maxi
Voltage rating	500	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	5000	MΩ mini

ENVIRONMENTAL

Operating	-40/+80	° C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	27	N mini
Axial force – Opposite end	27	N mini
Torque	NA	N.cm mini

Recommended torque

Mating	N	170	N.cm
	QMA	0	N.cm
		0	N.cm
Panel nut			N.cm

Mating life	100	Cycles mini
Weight	17,2600	g

OTHER CHARACTERISTICS

*RF leakage Interf. only: 3<F<6GHz=>70dB
 <-120dBc at 1.8GHz (2 x 20W)

Issue : 0633 A

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

**RADIALL**

®

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

R191762000