
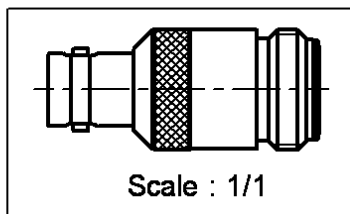



BNC FEMALE - N FEMALE ADAPTER

R192.418.000

Série : -

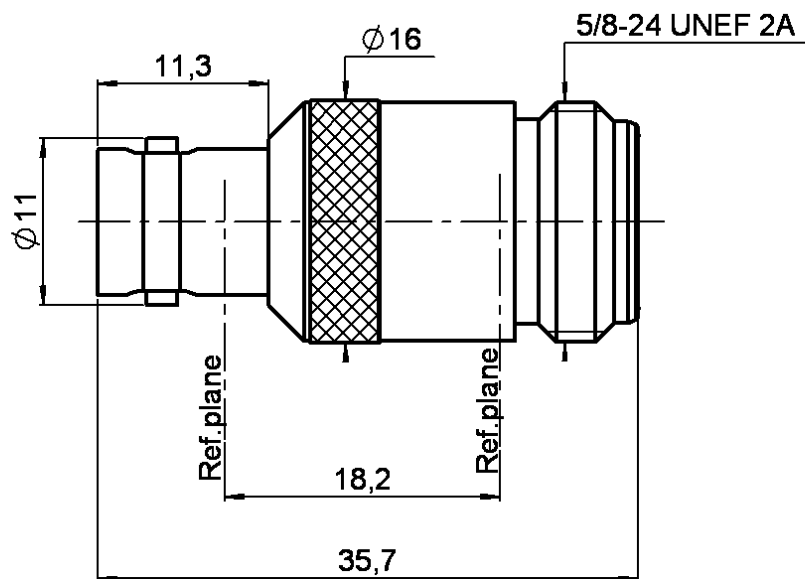

Scale : 1/1

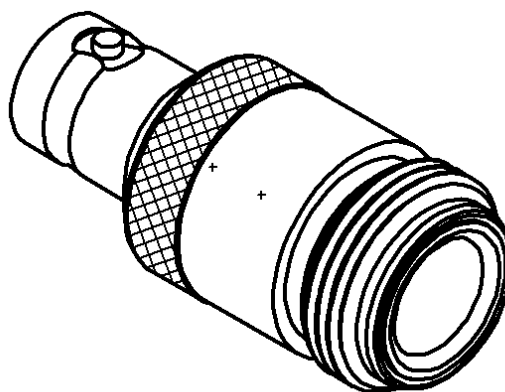

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	BRASS	NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
OUTER CONTACT	BRASS	NICKEL 2
INSULATOR	PTFE	
GASKET	-	-
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0204 C

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.



BNC FEMALE - N FEMALE ADAPTER**R192.418.000**

Série : -

PACKAGING

Standard	Unit	Other
	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	75	Ω
Frequency	0-1	GHz
VSWR	- + 0.000	x F(GHz) Maxi
Insertion loss	-	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (NA	- F(GHz)) dB Maxi
Voltage rating	500	Veff Maxi
Dielectric withstanding voltage	1500	Veff mini
Insulation resistance	5000	M Ω mini

ENVIRONMENTAL

Operating	-55/+155	$^{\circ}\text{C}$
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	27	N mini
Axial force – Opposite end	27	N mini
Torque	NA	N.cm mini

Recommended torque

Mating	BNC	0	N.cm
	N	0	N.cm
	-	0	N.cm
Panel nut	NA	NA	N.cm

Mating life	500	Cycles mini
Weight	0.000	g

OTHERS CHARACTERISTICS**Issue : 0204 C**

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

**RADIALL**

®

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

R192418000