





GLASS BEAD

R280.752.000

Series : ACC-COAX

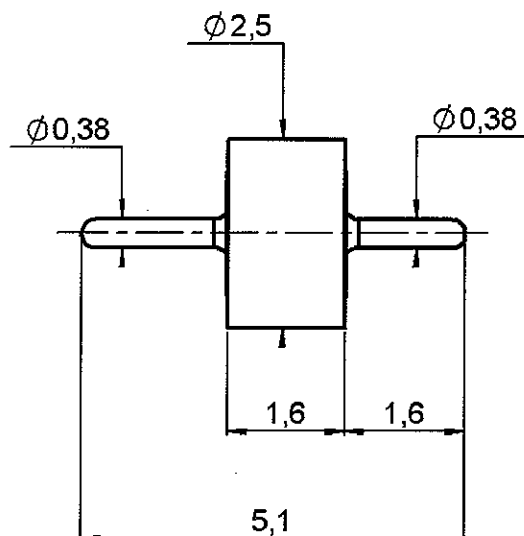

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	FERRO-NICKEL	GOLD 1.27 OVER NICKEL 1.27
CENTER CONTACT	FERRO-NICKEL	GOLD 1.27 OVER NICKEL 1.27
OUTER CONTACT	-	-
INSULATOR	GLASS	-
GASKET	-	-
OTHERS PARTS	-	-

Operating temperature : -65/+200 °C

Weight : 0,0440 g

Others characteristics : -

Issue : 0436 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



RADIALL®

GLASS BEAD


R280.752.000

Series : ACC-COAX


ADDITIONAL INFORMATIONS
MOUNTING INSTRUCTIONS

1 - MOUNTING HOLE

FLANGE SHROUD

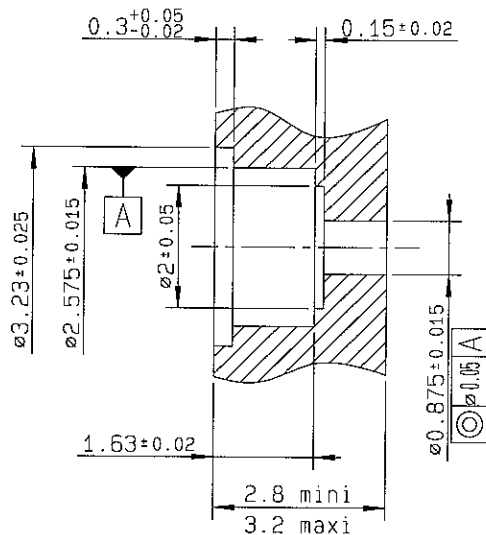


THREAD-IN SHROUD

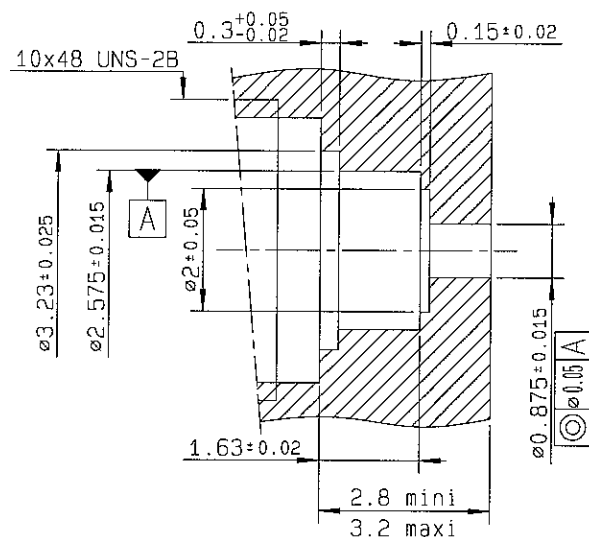

2 - ASSEMBLY INSTRUCTIONS

2-1 - Introduce the glass bead into its housing .

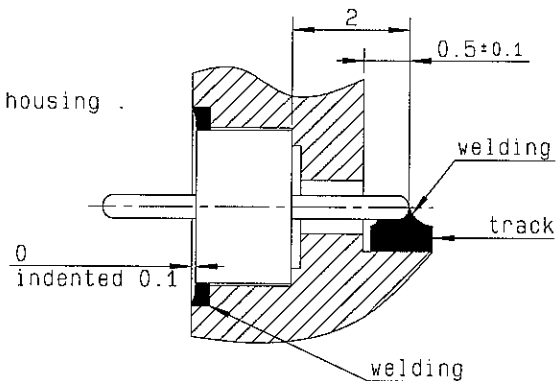2-2 - Weld the ring by putting
a welding wire in the groove .2-3 - Weld the pin on the track .
Beware of putting too much welding !

IMPORTANT: for maximum RF characteristics the link track/pin must be as thin as possible. We advise you to respect rigourously the 0.5+0.1 dimension, by welding accurately the bead pin directly on the track .

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R280752000](#) [R280752000W](#)