





COAXIAL ATTENUATOR SMA 2.9 DC-40GHZ 2 W - 5DB

PAGE 1/2 ISSUE 27-08-20C SERIES PART NUMBER R413305000 ATTENUATOR

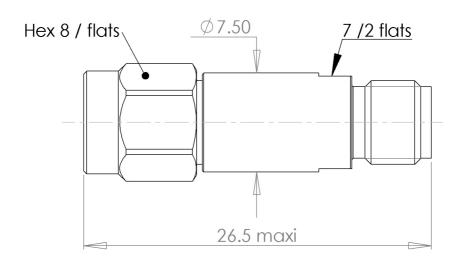

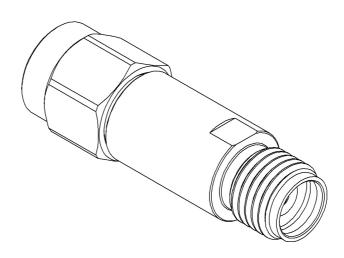



Scale 1:1

All dimensions are in mm. Tolerances according ISO 2768 m-H



COMPONENTS	MATERIALS	PLATING (μm)
Body Male center contact Female center contact Outer contact	STAINLESS STEEL BERYLLIUM COPPER BERYLLIUM COPPER STAINLESS STEEL	PASSIVATED GOLD 1.3 OVER NICKEL2 GOLD 1.3 OVER NICKEL2 PASSIVATED
Insulator Gasket Substrate Resistor Others parts	- SILICONE RUBBER ALUMINA THIN FILM	





COAXIAL ATTENUATOR SMA 2.9 DC-40GHZ 2 W - 5DB

PAGE <b>2/2</b>	ISSUE <b>27-08-20C</b>	SERIES ATTENUATOR	PART NUMBER <b>R413305000</b>
-----------------	------------------------	----------------------	-------------------------------

### **ELECTRICAL CHARACTERISTICS**

Frequency (GHz)	DC - 40
V.S.W.R (≤)	1.60 (1.4 typ.)
Deviation(±dB)	0.8


Operating Frequency Range	DC - 40	GHz
Impedance	50	Ω
Nominal Attenuation	5	dB
Peak power at 25°C (1µs, 1‰)	100	W
Average power at 25°C	2	W (Free Air Cooled)
		W (Conduction Cooled)


# MECHANICAL CHARACTERISTICS

Connectors	SMA 2.9	Male Female	MIL-C 39012
Weight	6,65	g	

# **ENVIRONMENTAL CHARACTERISTICS**

Operating temperature range	-55/+125	°C
Storage temperature range	-55/+125	°C





## **SPECIFICATION**

### **OTHER CHARACTERISTICS**

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radiall:

R413305000