



2 W

DC- 8 GHz


BNC

COAXIAL ATTENUATOR

issue
30.aug.95

Page
1 / 1

DRAWING

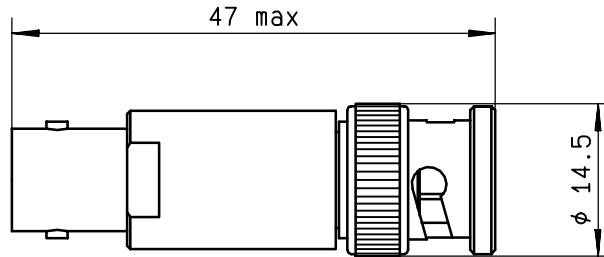

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 8 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 13 dB

FREQUENCY	DC- 4 GHz	4 - 8 GHz
V.S.W.R	<= 1.20	<= 1.25
DEVIATION (dB)	+0.3 / -0.3	+0.5 / -0.5


TEMPERATURE SENSITIVITY : $4 \times 10^{-4} \frac{\text{dB}}{\text{dB} \cdot ^\circ\text{C}}$
 PEAK POWER at 25°C (1µs,1%) : 100 W
 AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : BNC male/female per MIL-C 39012
 WEIGHT : < 30 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

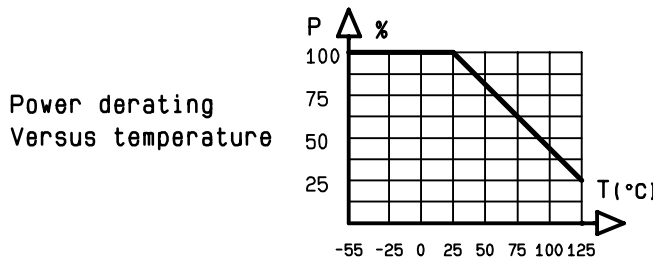

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

CREATION				
N° :				
PEN/EP:CAT				
Name: AF				
Date: 30.aug.95				
APP.: VE				
ISSUE	REVISIONS	NAME	APPR.	

RADIALL®
 101. rue P. Hoffmann -Z.I Ouest-
 93116 ROSNY/BOIS Cedex-FRANCE
 Phone: 33(1)49353535
 Fax : 33(1)48546363
 Twx RADIA 235220F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Radial:](#)

[R414413000](#)