




SS-132-G-2

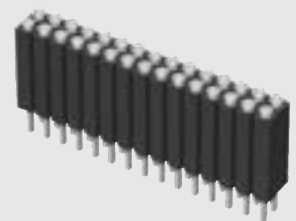

ESD-115-TT-05

(2.54 mm) .100"

SS, SD, ESD, ESS, HSS SERIES

PRECISION MACHINED SOCKET STRIPS

Mates with:

TS, TD, HTS, BBS,
BBD, BBL, BDL, BHS

SPECIFICATIONS

For complete specifications see www.samtec.com?SS,
www.samtec.com?ESS,
www.samtec.com?SD,
www.samtec.com?ESD or
www.samtec.com?HSS

Insulator Material:

SS, SD, ESS, ESD=

Black G.F. Polyester

HSS=

Black Liquid Crystal Polymer

Contact:

BeCu

Shell:

Brass except Style 5A

Phosphor Bronze

Plating:

Au over 50 μ " (1.27 μ m) Ni or

Sn over 50 μ " (1.27 μ m) Ni

Operating Temp Range:

-55 °C to +125 °C

Lead Size Range:

(0.38 mm to 0.56 mm)

.015" to .022" DIA

and most IC leads

RoHS Compliant:

Yes

Lead-Free Solderable:

SS, SD, ESS, ESD:

No, Lead Wave only

HSS: Yes

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




FILE NO. E111594

TYPE STRIP	1	NO. PINS PER ROW	PLATING OPTION	LEAD STYLE	OPTION	OTHER OPTION
		01 thru 32 =SS, ESS Series	-S = 10 μ " (0.25 μ m) Gold contact, Tin shell (Styles 2 & 22 only)		-L = Locking Socket	-N = Non Flush
		01 thru 36 =HSS, SD & ESD Series	-T = 30 μ " (0.76 μ m) Gold contact, Tin shell		Add -L suffix for locking lead socket in end positions. Requires Style -2 or -22 and .035" $\pm$.003 DIA board hole.	
			-G = 30 μ " (0.76 μ m) Gold contact, 10 μ " (0.25 μ m) Gold shell		Requires -T Plating Option	
			-TT = Tin contact and shell (Styles 1, 2, 4, and 05 except LIF N/A)			N/A Style -5A

LIF= Low Insertion Force


ALSO AVAILABLE (MOQ Required)

- Locking lead option on ESS and ESD series

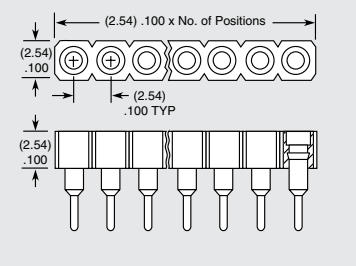

SS = Standard Single Row Socket	HSS = High Temp Single Row Socket
------------------------------------	--------------------------------------

Style -5A not available.
Styles -5A & -05 socket heads not countersunk.

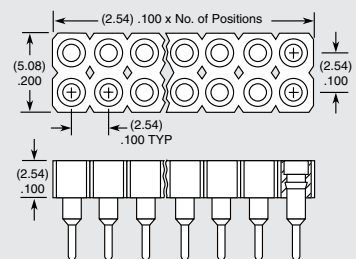


Style -5A not available.
Styles -5A & -05 socket heads not countersunk.

Note:
Some lengths, styles and options are non-standard, non-returnable.


-1A, -1B OR -1C

For LIF specify -21A, -21B or -21C (SS, HSS, SD)

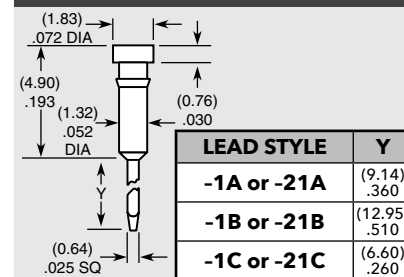

-2, -22*, -5A, or -38*


*For LIF specify -22 or -38 (SS, HSS, SD)

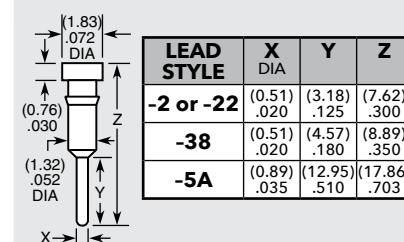

Locking lead available. See OPTION.

-03, -04, -05

For LIF specify -23 (ESS, ESD)



LEAD STYLE	A	B	C
-05	(17.86) .703	(13.46) .530	(4.39) .173
-03 or -23	(11.51) .453	(8.38) .330	(3.12) .123
-04	(14.05) .553	(10.92) .430	(3.12) .123

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[SS-116-G-2](#) [SS-105-G-2](#) [SS-106-G-2](#) [SS-132-G-2](#) [SS-120-S-2](#) [SS-109-T-2](#) [SS-104-G-2](#) [SS-114-G-2](#) [SS-114-S-2](#)
[SS-103-G-2](#) [SS-120-G-2](#) [SS-102-T-2](#) [SS-113-S-2](#) [SS-120-T-2](#) [SS-102-G-2](#) [SS-114-T-2](#) [SS-125-T-2](#) [SS-106-T-2](#)
[SS-110-T-2](#) [SS-107-S-2](#) [SS-113-T-2](#) [SS-116-T-2](#) [SS-112-T-2](#) [SS-132-TT-2](#) [SS-118-T-2](#) [SS-105-T-2](#) [SS-116-T-2-N](#)
[SS-101-TT-2](#) [SS-111-G-2](#) [SS-124-S-2](#) [SS-132-G-2-N](#) [SS-107-TT-2](#) [SS-126-G-2](#) [SS-107-T-2](#) [SS-132-T-2](#) [SS-108-](#)
[T-2-N](#) [SS-112-T-2-N](#) [SS-108-G-2](#) [SS-106-T-2-N](#) [SS-118-T-2-N](#) [SS-103-S-2](#) [SS-112-TT-2-N](#) [SS-110-T-2-N](#) [SS-105-](#)
[T-2-N](#) [SS-112-G-22](#) [SS-132-T-2-N](#) [SS-115-G-2](#) [SS-103-T-2](#) [SS-108-T-2](#) [SS-124-G-2](#) [SS-115-TT-2](#) [SS-112-G-2](#)
[SS-126-S-2](#) [SS-113-G-2](#) [SS-106-T-5](#) [SS-109-G-2](#) [SS-116-TT-2](#) [SS-124-TT-2](#) [SS-103-TT-2](#) [SS-120-T-2-N](#) [SS-110-](#)
[TT-2-N](#) [SS-125-TT-2](#) [SS-106-TT-2](#) [SS-107-T-2-N](#) [SS-104-T-2-N](#) [SS-104-T-2](#) [SS-118-G-2](#) [SS-101-G-2](#) [SS-121-G-2](#)
[SS-109-TT-2](#) [SS-132-G-38](#) [SS-110-S-2](#) [SS-105-TT-2](#) [SS-116-S-2](#) [SS-130-G-2](#) [SS-107-G-2](#) [SS-122-T-2](#) [SS-108-](#)
[S-2](#) [SS-111-T-2](#) [SS-101-T-2](#) [SS-112-S-2](#) [SS-125-G-2](#) [SS-104-S-2](#) [SS-115-T-2](#) [SS-101-S-2](#) [SS-106-S-2](#) [SS-105-S-](#)
[2](#) [SS-130-T-2-N](#) [SS-102-TT-2](#) [SS-109-S-2](#) [SS-125-S-2](#) [SS-108-TT-2](#) [SS-123-TT-2](#) [SS-102-S-2](#) [SS-104-TT-2](#) [SS-](#)
[108-TT-2-N](#) [SS-110-TT-2](#) [SS-120-TT-2](#) [SS-128-G-2](#) [SS-114-TT-2](#)