

## Features

- Formerly J.W. Miller® model
- Current rating up to 920 mA
- Inductance range: 1.0  $\mu$ H to 1,000  $\mu$ H
- RoHS compliant\*

## Applications

- DC/DC converters
- Power supplies
- General use

# 77F Series Conformal Coated RF Choke

### Electrical Specifications (@ 25 °C)

Bourns Part No.	Inductance		Q Min.	Test Frequency (MHz)	SRF (MHz) Min.	DCR ( $\Omega$ ) Max.	Idc (mA)
	( $\mu$ H)	Tol. (%)					
77F1R0K-RC	1.0	$\pm$ 10	50	25.2	157	0.17	920
77F1R2K-RC	1.2	$\pm$ 10	50	7.96	144	0.18	880
77F1R5K-RC	1.5	$\pm$ 10	50	7.96	131	0.20	830
77F1R8K-RC	1.8	$\pm$ 10	50	7.96	121	0.22	790
77F2R2K-RC	2.2	$\pm$ 10	50	7.96	110	0.24	750
77F2R7K-RC	2.7	$\pm$ 10	60	7.96	100	0.25	720
77F3R3K-RC	3.3	$\pm$ 10	60	7.96	94	0.30	670
77F3R9K-RC	3.9	$\pm$ 10	60	7.96	86	0.35	640
77F4R7K-RC	4.7	$\pm$ 10	70	7.96	80	0.40	620
77F5R6K-RC	5.6	$\pm$ 10	70	7.96	74	0.45	590
77F6R8K-RC	6.8	$\pm$ 10	75	7.96	68	0.50	550
77F8R2K-RC	8.2	$\pm$ 10	80	7.96	53	0.52	530
77F100K-RC	10	$\pm$ 10	85	7.96	40	0.65	500
77F120K-RC	12	$\pm$ 10	75	2.52	34	0.70	480
77F150K-RC	15	$\pm$ 10	70	2.52	20	0.75	460
77F180K-RC	18	$\pm$ 10	60	2.52	14	0.80	430
77F220K-RC	22	$\pm$ 10	60	2.52	9.9	0.90	410
77F270K-RC	27	$\pm$ 10	50	2.52	7.6	1.00	390
77F330J-RC	33	$\pm$ 5	50	2.52	6.5	1.10	370
77F390J-RC	39	$\pm$ 5	50	2.52	6.5	1.20	350
77F470J-RC	47	$\pm$ 5	45	2.52	6.3	1.30	340
77F560J-RC	56	$\pm$ 5	45	2.52	6.2	1.50	320
77F680J-RC	68	$\pm$ 5	40	2.52	5.7	1.80	305
77F820J-RC	82	$\pm$ 5	35	2.52	5.3	2.00	290
77F101J-RC	100	$\pm$ 5	30	2.52	4.8	2.50	275
77F121J-RC	120	$\pm$ 5	60	0.796	3.8	3.0	185
77F151J-RC	150	$\pm$ 5	60	0.796	3.5	4.0	175
77F181J-RC	180	$\pm$ 5	60	0.796	3.0	4.5	165
77F221J-RC	220	$\pm$ 5	60	0.796	2.8	5.0	155
77F271J-RC	270	$\pm$ 5	60	0.796	2.6	6.0	145
77F331J-RC	330	$\pm$ 5	60	0.796	2.4	6.5	137
77F391J-RC	390	$\pm$ 5	55	0.796	2.0	7.5	133
77F471J-RC	470	$\pm$ 5	50	0.796	1.8	8.5	126
77F561J-RC	560	$\pm$ 5	50	0.796	1.6	9.5	120
77F681J-RC	680	$\pm$ 5	45	0.796	1.6	12.0	113
77F821J-RC	820	$\pm$ 5	45	0.796	1.4	14.0	105
77F102J-RC	1000	$\pm$ 5	50	0.796	1.2	20.0	100

### General Specifications

Temperature Rise ..... 35 °C at Idc  
 Operating Temperature ..... -55 °C to +105 °C  
 Storage Temperature ..... -55 °C to +105 °C  
 Dielectric Strength..... 500 Vrms

### Materials

Core..... Ferrite  
 Wire ..... Polyester copper  
 Terminal Coating..... Sn-Ag-Cu alloy  
 Coating..... Epoxy resin  
 Packaging..... 5000 pcs. per 14-inch reel


### How to Order

**77F 151J - TR - RC**

Model \_\_\_\_\_  
 Value Code \_\_\_\_\_  
 (See table)  
 Packaging Code \_\_\_\_\_  
 TR = 5000 pcs./14-inch reel  
 Compliance Code \_\_\_\_\_  
 RC = RoHS compliant\*

*Example:*  
 77F102J-TR-RC = 1000  $\mu$ H packaged  
 5000 pcs./14-inch reel.

### Electrical Schematic




**WARNING Cancer and Reproductive Harm**  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Specifications are subject to change without notice. Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

# 77F Series Conformal Coated RF Choke

**BOURNS®**

## Product Dimensions

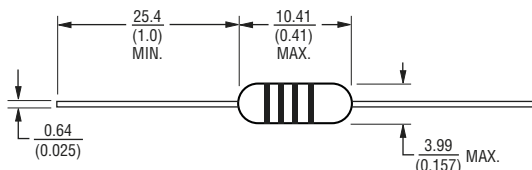


DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$


## Typical Part Marking - EIA Color Code

Color	1st & 2nd Significant Figure	Multiplier	Tolerance
Silver		0.01	±10 %
Gold		0.1	±5 %
Black	0	1	
Brown	1	10	
Red	2	100	
Orange	3	1000	
Yellow	4		
Green	5		
Blue	6		
Violet	7		
Gray	8		
White	9		

Example for 6.8  $\mu\text{H}$ , ±10 %



Example for 270  $\mu\text{H}$ , ±5 %



**BOURNS®**

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 520 390 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

[www.bourns.com](http://www.bourns.com)

REV. 10/12

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, “Bourns”).

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns’ knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user’s application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user’s sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products’ data sheets in the section entitled “Applications.” Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user’s sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or “automotive grade” does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products’ data sheets in the section entitled “Applications.” Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user’s sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

*For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:*

*Web Page:* <http://www.bourns.com/legal/disclaimers-terms-and-policies>

*PDF:* <http://www.bourns.com/docs/Legal/disclaimer.pdf>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Bourns:

[77F471J](#) [77F100K](#) [77F101J](#) [77F100-TR-RC](#) [77F560J-RC](#) [77F471J-TR-RC](#) [77F4R7K-RC](#) [77F2R7K-RC](#) [77F221J-RC](#) [77F8R2K-TR-RC](#) [77F470J-TR-RC](#) [77F181J-RC](#) [77F681J-RC](#) [77F151J-RC](#) [77F1R8K-RC](#) [77F1R5K-TR-RC](#) [77F1R2K-RC](#) [77F2R2K-TR-RC](#) [77F561J-RC](#) [77F220K-RC](#) [77F3R3K-RC](#) [77F120K-TR-RC](#) [77F391J](#) [77F3R9K](#) [77F2R7K](#) [77F151J](#) [77F560J](#) [77F331J](#) [77F5R6K](#) [77F1R8K](#) [77F120K](#) [77F270K](#) [77F271J-RC](#) [77F101J-TR-RC](#) [77F220K-TR-RC](#) [77F151J-TR-RC](#) [77F1R0K-TR-RC](#) [77F3R9K-RC](#) [77F180K-RC](#) [77F150K-TR-RC](#) [77F820J-RC](#) [77F680J-RC](#) [77F330J-TR-RC](#) [77F1R0K-RC](#) [77F6R8K-RC](#) [77F120J-TR-RC](#) [77F5R6K-RC](#) [77F270K-RC](#) [77F390J-RC](#) [77F331J-RC](#) [77F391J-TR-RC](#) [77F821J-RC](#) [77F102J-TR-RC](#) [77F680J-TR-RC](#) [77F101-TR-RC](#) [77F271J](#) [77F1R0K](#) [77F6R8K](#) [77F1R5K](#) [77F3R3K](#) [77F180K](#) [77F470J](#) [77F2R2K](#) [77F8R2K](#) [77F4R7K](#) [77F330J](#) [77F561J](#) [77F680J](#) [77F220K](#) [77F120J](#) [77F390J](#) [77F102J](#) [77F681J](#) [77F221J](#) [77F821J](#) [77F150K](#) [77F181J](#) [77F820J](#) [77F1R2K](#) [77F100K-TR-RC](#) [77F221J-TR-RC](#) [77F3R9K-TR-RC](#) [77F5R6K-TR-RC](#) [77F121J-TR-RC](#) [77F3R3K-TR-RC](#) [77F1R2K-TR-RC](#) [77F331J-TR-RC](#) [77F180K-TR-RC](#) [77F220J-TR-RC](#) [77F181J-TR-RC](#) [77F681J-TR-RC](#) [77F560J-TR-RC](#) [77F1R8K-TR-RC](#) [77F821J-TR-RC](#) [77F4R7K-TR-RC](#) [77F390J-TR-RC](#) [77F6R8K-TR-RC](#) [77F271J-TR-RC](#) [77F561J-TR-RC](#) [77F820J-TR-RC](#)