

## Features

- Formerly a Riedon™ product
- Resistances from 0.02 to 51K ohms
- Power rating to 35 watts
- Resistance tolerances  $\pm 1$  or  $\pm 5$  %
- TCR to  $\pm 50$  PPM/°C
- High stability film resistance elements

- Non-inductive (<10 nH)
- Moisture resistant
- Isolated mounting tab
- TO-220 housing
- RoHS compliant\*

## PF2203 Series – Riedon™ TO-220 Power Thick Film Resistors by Bourns

### Electrical Characteristics

Characteristic	PF2203
Power Rating (with heat sink) <sup>1</sup>	35 W
Power Rating (without heat sink) <sup>2</sup>	1 W
Thermal Resistance	3.3 °C/W
Resistance Range <sup>3</sup>	0.02 $\Omega$ (min.) to 51 K $\Omega$ (max.)
Tolerances <sup>4</sup>	$\pm 1$ % and $\pm 5$ % $\pm 5$ % below 0.1 $\Omega$
Temperature Coefficient	$\pm 50$ PPM/°C ( $R \geq 10 \Omega$ ) $\pm 100$ PPM/°C ( $0.1 \Omega \leq R < 10 \Omega$ ) $\pm 250$ PPM/°C ( $R < 0.1 \Omega$ )

Notes:

1. Power rating based on 25 °C flange temperature.
2. Power rating based on 25 °C ambient temperature.
3. [Contact Bourns](#) for higher or lower values.
4. [Contact Bourns](#) for possible tighter tolerances.

### Additional Information

Click these links for more information:



[PRODUCT](#)



[TECHNICAL  
LIBRARY](#)



[INVENTORY](#)



[SAMPLES](#)



[CONTACT](#)

### General Specifications

Temperature Range.....-55 °C to +175 °C  
 Dielectric Strength ..... 2000 VDC  
 Max. Operating Voltage  
 .....500 V or  $\sqrt{P \cdot R}$ , whichever is less  
 Inductance..... 100 nH  
 Insulation Resistance ...>1000 megohms  
 Terminal Finish ..... Tin-plated copper  
 Mass ..... 2.1 g  
 Flammability Rating ..... UL94 V-0

### Environmental Performance

Specification	$\Delta R$	Test Conditions
Load Life	$\pm 1$ %	25 °C, 90 min. ON, 30 min. OFF, 1000 hrs.
Humidity Resistance	$\pm 1$ %	40 °C, 90-95 % RH, DC 0.1 W, 1000 hrs.
Temperature Cycle	$\pm 0.25$ %	-55 °C for 30 min., +155 °C for 30 min., 5 cycles
Solder Heat	$\pm 0.1$ %	+350 °C / -5 °C, 3 s.
Vibration	$\pm 0.25$ %	IEC 60068-2-6

**BOURNS®**

**Americas:** Tel: +1 951-781-5500 • Email: [americus@bourns.com](mailto:americus@bourns.com)

**Mexico:** Tel: +52-614-478-0400 • Email: [mexicus@bourns.com](mailto:mexicus@bourns.com)

**Asia:** Tel: +886-2-2562-4117 • Email: [asiacus@bourns.com](mailto:asiacus@bourns.com)

**EMEA:** Tel: +36 88 885 877 • Email: [eurocus@bourns.com](mailto:eurocus@bourns.com)

[www.bourns.com](http://www.bourns.com)



**WARNING Cancer  
and Reproductive Harm**  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

\*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Specifications are subject to change without notice. Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

"Bourns" is a registered trademark of Bourns, Inc. in the United States and other countries.

In April 2023, BE Services Company, Inc., a subsidiary of Bourns, Inc., purchased certain assets of Riedon, Inc., including its logo and trademarks and the right to continue to manufacture former Riedon™ products.


"Riedon Logo" is a registered trademark of BE Services Company, Inc., in the United States.

"Riedon" is a trademark of BE Services Company, Inc.

## PF2203 Series – Riedon™ T0-220 Power Thick Film Resistors by Bourns

**BOURNS®**

### Product Dimensions

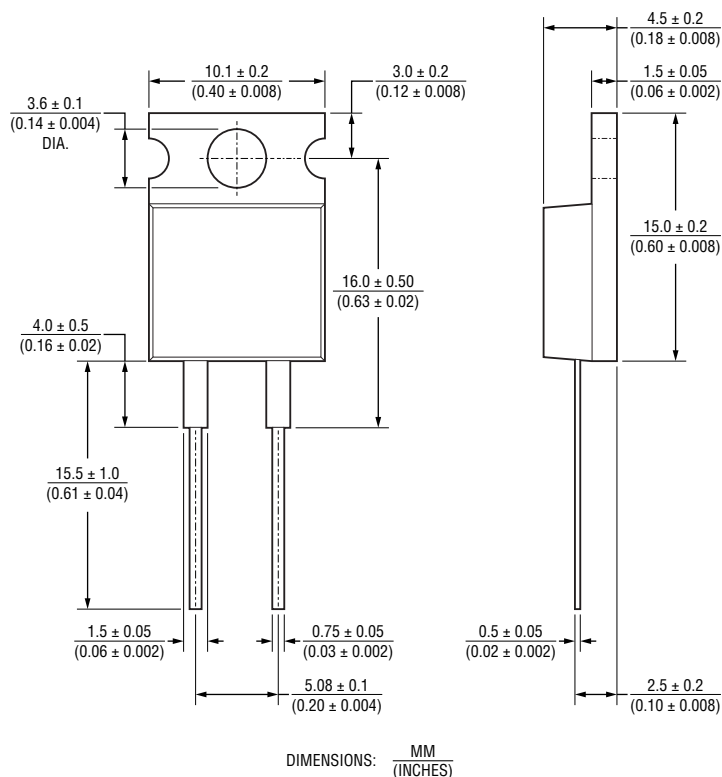

### Mounting Notes

The PF2203 Series Thick Film Resistors must be attached to a suitable heat sink. Mount resistor using thermal grease to a clean, flat surface. Use a compression washer to provide 150 to 300 pounds (665 to 1330 N) of mounting force. Torque mounting screw to 8 in-lbs (0.9 N-m). Torque termination screw to 8 in-lbs (0.9 N-m).

Mounting tab is isolated from both pins.

### How to Order

**PF2203 - 100R J x**

Model \_\_\_\_\_

PF2203

Resistance \_\_\_\_\_

0.02  $\Omega$  to 51 K $\Omega$

Tolerance \_\_\_\_\_

F =  $\pm 1\%$

J =  $\pm 5\%$

Internal Code \_\_\_\_\_


0 to 9

### Packaging Specifications

Tube ..... 50 pcs. per tube

### Pulse Energy Durability

**PF2203 10 ohm 1 %**

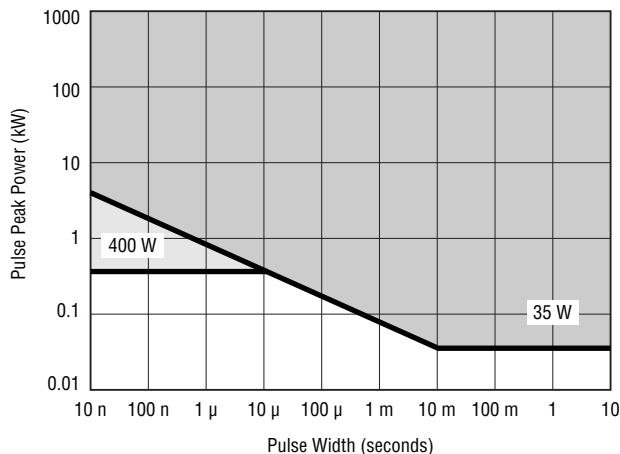


Tentative continuous pulse power allowance at duty 0.01. Load life test will be necessary in actual equipment because curve may be changed by resistance, repetition, duty, and operating temperature.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

### Derating Curve

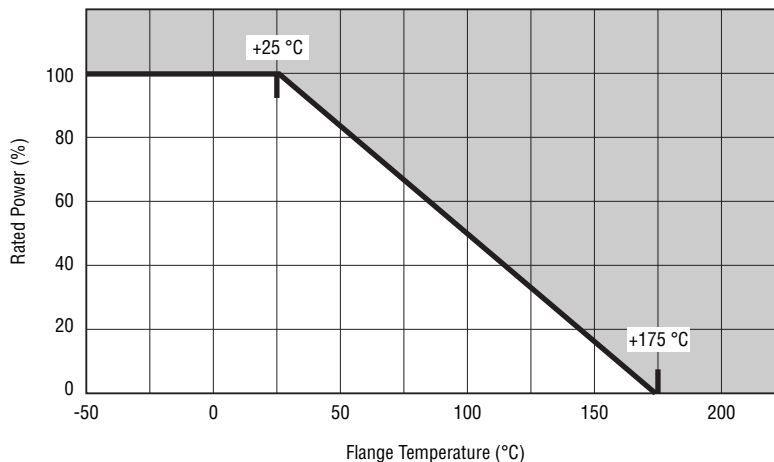

### Power Rating Notes

The PF2203 Series Thin Film Resistors must be attached to a suitable heat sink. Without a heat sink the maximum power rating is 1 W. The maximum internal resistor temperature is 175 °C.

To specify an appropriate heat sink use the following formula:

$$R_{\theta H} = \frac{T_{MAX} - (P * R_{\theta R}) - T_A}{P}$$

Where:  $R_{\theta H}$  = Thermal Resistance of Heat sink (°C/W)  
 $R_{\theta R}$  = Thermal Resistance of Resistor (°C/W)  
 $T_{MAX}$  = Maximum Temperature of Resistor  
 $T_A$  = Ambient Temperature of Heat sink (°C)  
 $P$  = Power Through Resistor (W)

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

*For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:*

Web Page: <http://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <http://www.bourns.com/docs/Legal/disclaimer.pdf>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bourns:](#)

[PF2203-2R7F1](#) [PF2203-18KF1](#) [PF2203-82RF1](#) [PF2203-8R2F1](#) [PF2203-0R03F1](#) [PF2203-1RF1](#) [PF2203-3R9F1](#)  
[PF2203-10KF1](#) [PF2203-5R6F1](#) [PF2203-9K1F1](#) [PF2203-22RF1](#) [PF2203-25KJ1](#) [PF2203-0R68F1](#) [PF2203-470RJ1](#)  
[PF2203-20KF9](#) [PF2203-20RF1](#) [PF2203-0R1F1](#) [PF2203-0R2F1](#) [PF2203-200RF1](#) [PF2203-470RF1](#) [PF2203-750RF1](#)  
[PF2203-7R5F1](#) [PF2203-20KF1](#) [PF2203-3K9F1](#) [PF2203-75RF1](#) [PF2203-75RF9](#) [PF2203-15KF1](#) [PF2203-27RF1](#)  
[PF2203-50RF1](#) [PF2203-0R01J9](#) [PF2203-15RF1](#) [PF2203-250RF1](#) [PF2203-680RF1](#) [PF2203-8K2F1](#) [PF2203-0R05J1](#)  
[PF2203-0R05J9](#) [PF2203-0R075J1](#) [PF2203-1R8F1](#) [PF2203-33RF1](#) [PF2203-1KF1](#) [PF2203-330RF1](#) [PF2203-4K7F1](#)  
[PF2203-100RF1](#) [PF2203-47RF1](#) [PF2203-1R5F1](#) [PF2203-5RF1](#) [PF2203-6R8F1](#) [PF2203-0R01J1](#) [PF2203-0R02J1](#)  
[PF2203-0R5F1](#) [PF2203-2R2F1](#) [PF2203-4R7F1](#) [PF2203-10RF1](#) [PF2203-150RF1](#) [PF2203-25RF1](#) [PF2203-2K2F1](#)  
[PF2203-50KF1](#) [PF2203-51RF1](#) [PF2203-2RF1](#) [PF2203-5KF1](#) [PF2203-12RF1](#) [PF2203-2KF1](#) [PF2203-500RF1](#)