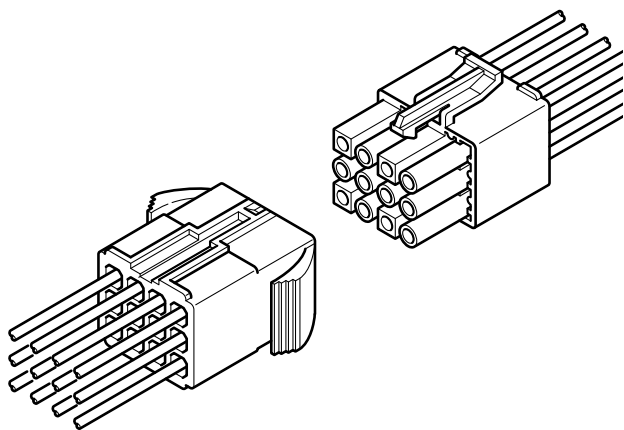


EL CONNECTOR

4.5 mm pitch/Disconnectable Crimp style Wire-to-wire connectors



The contacts for the compact EL connector can be easily inserted into the connector housings. The plug housing and the receptacle housing can be smoothly mated even if they are mechanically distorted.

- Easy insertion and secure installation of contacts
- A smooth connection even when pried during mating
- Durable arm lock mechanism
- Two contact styles
- Interchangeability with ML connector

Specifications

- Current rating: 10 A AC/DC
 - Voltage rating: 300 V AC/DC
 - Temperature range: -25°C to +90°C
(including temperature rise in applying electrical current)
 - Contact resistance: Initial value/ 7 mΩ max.
After environmental tests/ 10 mΩ max.
 - Insulation resistance: 1,000 MΩ min.
 - Withstanding voltage: 1,500 VAC/minute
 - Applicable wire: AWG #26 to #16
0.13 to 1.25 mm²
 - Applicable panel thickness: 0.8 to 2.0 mm
- * In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).
- * RoHS2 compliance
- * Dimensional unit: mm
- * Contact JST for details.

Note: The current rating varies depending on the number of circuits and the wire size used in each connector. The table below lists the current rating as a function of the number of circuits and the wire size.



Current unit : A

No. of circuits	Wire size (AWG)					
	#16	#18	#20	#22	#24	#26
2	10	6	5	4	4	3
3	10	6	5	4	4	3
4	10	6	5	4	4	3
6	8	5	4	3	3	3
9	6	4	3	3	2	2
12	6	4	3	3	2	2
15	6	4	3	3	2	2

Standards

- ☑ Recognized E60389
- ☑ Certified LR20812
- ☑ R75052

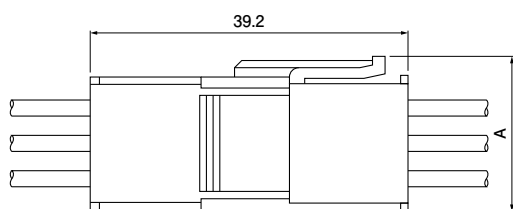Panel layout and Assembly layout



No. of circuits	Dimensions A (mm)
2~4 (Single-line arrangement)	10.4
4 (Double-line arrangement)	15.0
6	14.9
9~15	19.4


No. of circuits	Receptacle housing Model No.	Panel hole dimensions (mm)				Applicable panel thickness (mm)
		A	B	C	D	
2	ELR-02V	15.0	6.0	6.85	5.2	0.8~2.0
3	ELR-03V	19.7	6.0	6.85	5.2	
4	ELR-04V	24.2	6.0	6.85	5.2	
	ELR-04NV	15.6	10.6	11.6	5.2	
6	ELR-06V	19.7	10.2	11.1	5.2	
9	ELR-09V	19.7	14.8	15.7	5.2	
12	ELR-12V	24.2	14.8	15.7	5.2	
15	ELR-15V	28.7	14.8	15.7	5.2	

- Note: 1. Punch holes in the panel according to the figures and table shown above. Burrs must be removed.
 2. The strength of the panel must be considered when punching two or more holes.
 3. The connector must be inserted from the same side as the hole is punched.


EL CONNECTOR

Contact

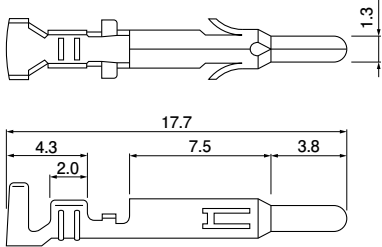Pin contact



Socket contact



Model No.		Applicable wire		Insulation O.D. (mm)	Q'ty/reel
Pin contact	Socket contact	mm ²	AWG #		
SLM-01T-P1.3E	SLF-01T-P1.3E	0.13~0.5	26~20	1.3~2.7	6,000
SLM-41T-P1.3E	SLF-41T-P1.3E	0.5~1.25	20~16	1.9~3.4	4,000
*SLM-42T-P1.3E	*SLF-42T-P1.3E	0.3+0.3~ 0.5+0.5	22+22~ 20+20	1.7+1.7~ 2.0+2.0	

Material and Finish	
Phosphor bronze, tin-plated (reflow treatment)	


RoHS2 compliance
Note: 1. Contact denoted by * is used for two wires.
2. Contact JST for special products.
3. Contact JST for brass products.

Contact	Crimping machine	Applicator		
		Crimp applicator	Dies	Crimp applicator with dies
SLM-01T-P1.3E	AP-K2N	MKS-L	MK/SLF/M-01-13E	APLMK SLF/M01-13E
SLF-01T-P1.3E				
SLM-42T-P1.3E			MK/SLF/M-42-13E	APLMK SLF/M42-13E
SLF-42T-P1.3E				
SLM-41T-P1.3E			MK/SLF/M-41-13E	APLMK SLF/M41-13E
SLF-41T-P1.3E				


Note: Contact JST for fully automatic crimping applicator.

Contact position location numbers

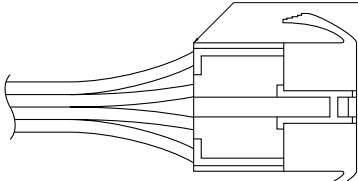Contact position numbers are stamped




Receptacle housing

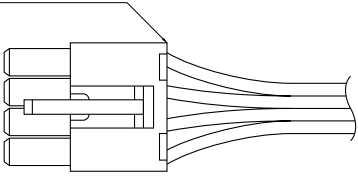

Plug housing

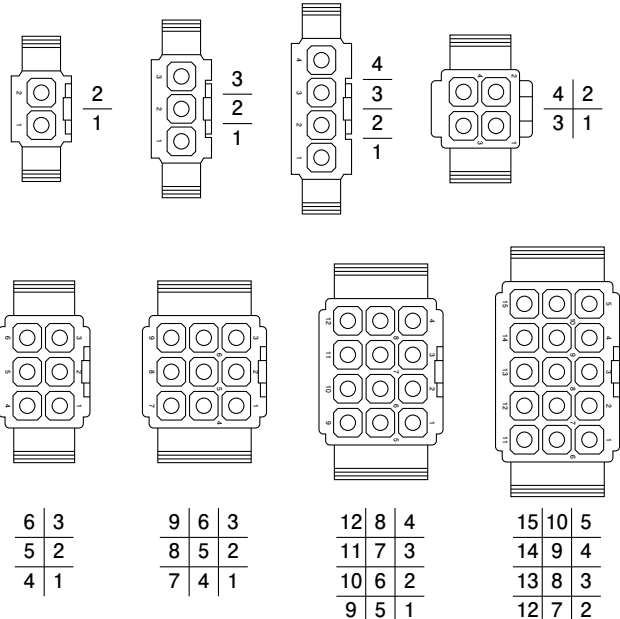Receptacle housing




6 3
5 2
4 1

9 6 3
8 5 2
7 4 1

12 8 4
11 7 3
10 6 2
9 5 1

15 10 5
14 9 4
13 8 3
12 7 2
11 6 1

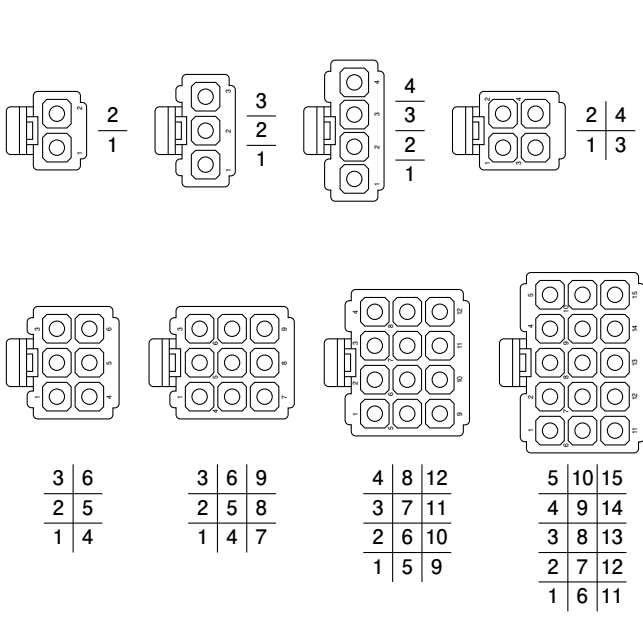Plug housing



2 1

3 2 1

4 3 2 1

2 4
1 3

3 6
2 5
1 4







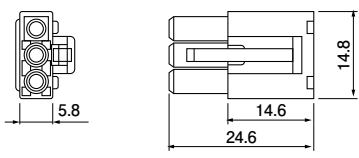









3 6 9
2 5 8
1 4 7

4 8 12
3 7 11
2 6 10
1 5 9

5 10 15
4 9 14
3 8 13
2 7 12
1 6 11

Housing

Material: PA 6, UL94V-0, white







No. of circuits	Voltage rating	Current rating	Receptacle housing (for pin contact)		Plug housing (for socket contact)	
2	300 V	10 A	ELR-02V  	Q'ty/ bag 500	ELP-02V 	Q'ty/ bag 500
			ELR-02VF  	Q'ty/ bag 500		
3	300 V	10 A	ELR-03V  	Q'ty/ bag 500	ELP-03V 	Q'ty/ bag 500
			ELR-04V  	Q'ty/ bag 500		
4	300 V	10 A	ELR-04NV  	Q'ty/ bag 500	ELP-04NV 	Q'ty/ bag 500
			ELR-04NVF  			
6	300 V	8 A	ELR-06V  	Q'ty/ bag 500	ELP-06V 	Q'ty/ bag 500

RoHS2 compliance

EL CONNECTOR

Housing

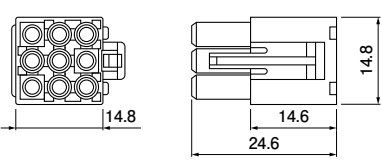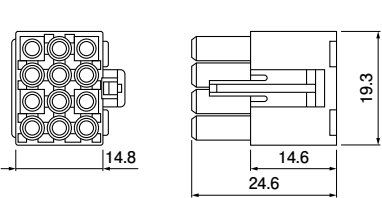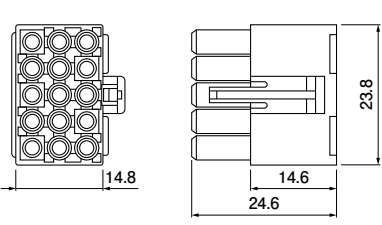Material: PA 6, UL94V-0, white

No. of circuits	Voltage rating	Current rating	Receptacle housing (for pin contact)		Plug housing (for socket contact)	
			ELR-09V	Q'ty/ bag	ELP-09V	Q'ty/ bag
9	300 V	6 A		500		500
12	300 V	6 A		500		500
15	300 V	6 A		500		500

RoHS2 compliance

Note: 1. ELR-02VF and ELR-04NVF are exclusively for free hanging. The other circuits can be used either for panel mounted or free hanging.
See "Panel layout" for the panel hole dimensions.
2. Contact JST for special products.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JST:](#)

[ELP-04NV\(P\)](#) [ELR-02VF\(P\)](#) [ELR-02V\(P\)](#) [ELR-15V\(P\)](#) [ELP-03V\(P\)](#) [SLM-42T-1.3E](#) [ELP-06V\(P\)](#) [ELR-04V\(P\)](#) [ELR-03V\(P\)](#) [ELP-12V\(P\)](#) [LLF-01T-1.3E](#) [SLF-41T-1.3E](#) [SLF-42T-P1.3E](#) [SLM-41T-1.3E](#) [ELR-04NVF\(P\)](#) [SLM-01T-P1.3E](#) [ELP-04V\(P\)](#) [ELP-09V](#) [SLM-01T-1.3E](#) [ELR-09V](#) [ELR-12V\(P\)](#) [SLF-01T-1.3E](#) [ELR-02VF](#) [ELP-04V](#) [ELR-15V](#) [ELR-03V](#) [ELP-04NV](#) [ELR-02V](#) [ELP-12V](#) [ELR-04V](#) [ELP-06V](#) [ELR-12V](#) [ELP-03V](#)