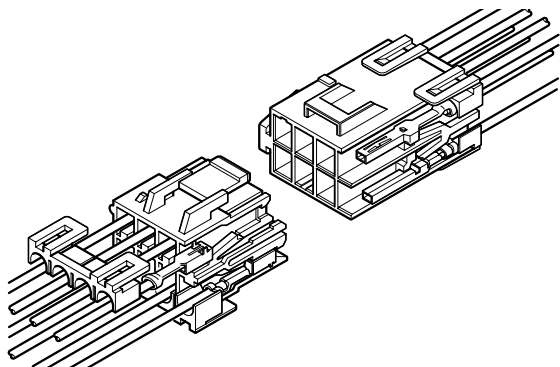


VL CONNECTOR

6.2mm pitch/Disconnectable Crimp style Wire-to-wire connectors
(Combined use for both wire-to-wire and wire-to-board connections)



This VL connector is 6.2 mm pitch wire-to-wire and wire-to-board connector, designed for large current up to 20 A (1 or 2-circuit with 3.5 mm² wire). Secondary retainer, which prevents from insufficient insertion of contact and coming off contact, may use and large current circuit can be connected certainly and safety.

- Housing lances
- Retainer
- Suited for large current
- Panel lock

Standards

- Recognized E60389
- Certified LR20812
- R9351103

Specifications

- Current rating: 20 A AC, DC max. (Refer to the following table.)
- Voltage rating: 600 V AC, DC max.
- Temperature range: -25°C to +90°C
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 7 mΩ max.
After environmental tests/ 10 mΩ max.
- Insulation resistance: 1,000 MΩ min.
- Withstanding voltage: 2,000 VAC/minute
- Applicable wire: AWG #22 to #12
0.3 to 3.5 mm²
- Applicable panel thickness: 0.5 to 2.0 mm
- * In using the products, refer to "Handling Precaution for Terminal and Connector" described on our website (Technical documents of Product information page).
- * Contact JST for details.
- * RoHS2 compliance

Note: The current rating varies depending on the number of circuits and the wire size used in each connector. The table below lists the current rating as a function of the number of circuits and the wire size.


Current unit: A

No. of circuits	Wire size (AWG)					
	#12	#14	#16	#18	#20	#22
1	20	15	10	8	6	4
2	20	15	10	8	6	4
3	19	14	9	8	6	4
4	18	13	9	7	6	4
6	16	12	8	7	5	3
8	16	11	7	6	5	3
12	15	10	7	6	4	3


Panel layout and Assembly layout

<2, 3, 4 circuits (Single-row)>

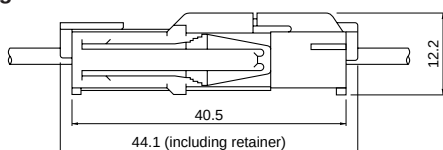Inner-housing lock





Outer-housing lock

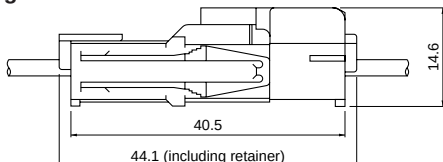


Shape I

Shape II




<4, 6, 8, 12 circuits>

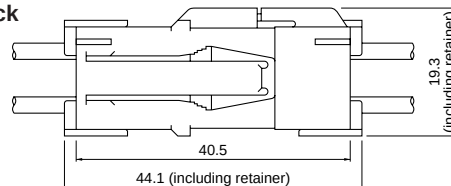Inner-housing lock



Outer-housing lock

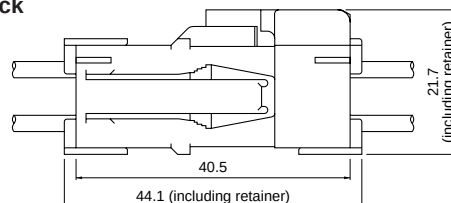


No. of circuits	Receptacle housing Model No.	Panel hole shape	Panel hole dimensions (mm) General tolerance A, B, D: ±0.13 C, E: ±0.1					Applicable panel thickness (mm)
			A	B	C	D	E	
2	VLR-02V	I	13.8	20.6	5.7	8.5	1.4	0.5~2.0
3	VLR-03V	I	20.0	26.8	5.7	8.5	1.4	
4	VLR-04V	II	13.8	20.6	7.0	15.4	4.2	
4 (Single-row)	VLR-04VN	I	26.2	33.0	5.7	8.5	1.4	
6	VLR-06V	II	20.0	26.8	7.0	15.4	4.2	
8	VLR-08V	II	26.2	33.0	7.0	15.4	4.2	
12	VL R-12V	II	38.9	45.4	7.0	15.4	4.2	


- Note: 1. Punch holes in the panel according to the figures and table shown above. Burrs must be removed.
2. The strength of the panel must be considered when punching two or more holes.
3. The connector must be inserted from the same side as the hole is punched.

Contact

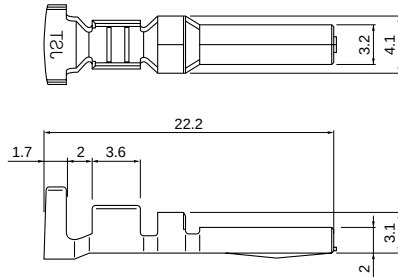Pin contact



Socket contact



Model No.		Applicable wire		Insulation	Q'ty/ reel
Pin contact	Socket contact	mm ²	AWG #	O.D. (mm)	
SVM-42T-P2.0	SVF-42T-P2.0	0.3~1.25	22~16	1.7~3.2	2,000
		0.3+0.3~ 0.5+0.75	22+22~ 20+18	1.7+1.7~ 2.5+2.7	
SVM-61T-P2.0	SVF-61T-P2.0	0.5~2.0	20~14	1.9~3.4	
		0.5+0.5~ 0.75+1.25	20+20~ 18+16	1.9+1.9~ 2.1+2.7	
SVM-81T-P2.0	SVF-81T-P2.0	3.5	12	4.1	

Material and Finish

Phosphor bronze, tin-plated (reflow treatment)


RoHS2 compliance

Note: Contact JST for special products.


Contact	Crimping machine	Applicator		
		Crimp applicator	Dies	Crimp applicator with dies
SVM-42T-P2.0	AP-K2N	MKS-L	MK/SVF/M-42-20	APLMK SVF/M42-20
SVF-42T-P2.0		—	—	—
SVM-61T-P2.0		MKS-L	MK/SVF/M-61-20	APLMK SVF/M61-20
SVF-61T-P2.0		—	—	—
SVM-81T-P2.0		MKS-L	MK/SVF/M-81-20	APLMK SVF/M81-20
SVF-81T-P2.0		—	—	—

Note: Contact JST for fully automatic crimping applicator.

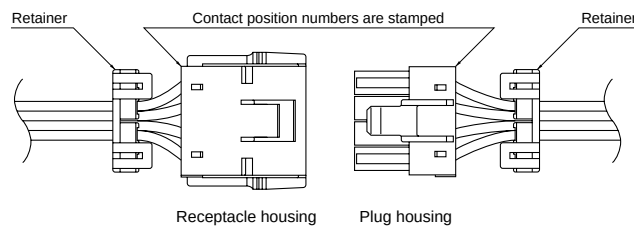Contact position location numbers




Receptacle housing

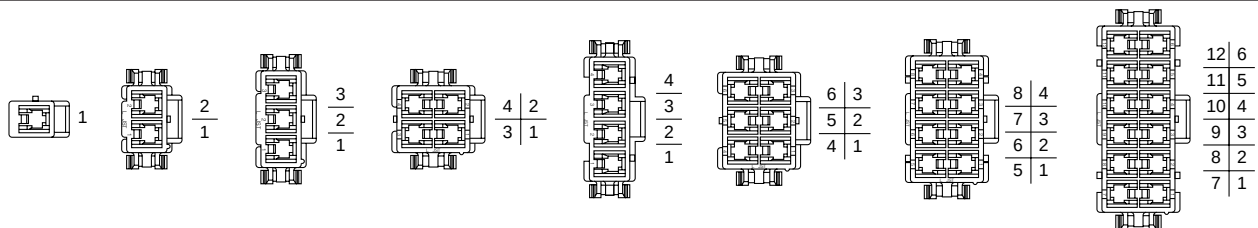


Plug housing
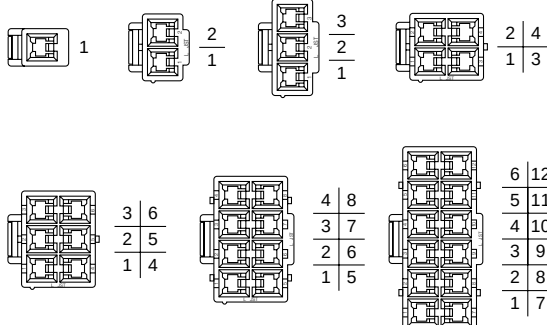
<Inner-housing lock>




















<Outer-housing lock>

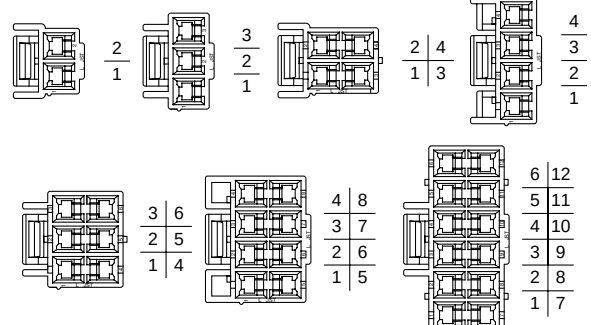

VL CONNECTOR

Housing

Material: Housing...PA 66, UL94V-0, white
Retainer...Glass-filled PA 66, UL94V-0, ivory

No. of circuits	Voltage rating	Current rating	Receptacle housing (for pin contact)		Plug housing (for socket contact)		Retainer	
1	600V	20A	VLR-01VF (Without panel lock product) 	Q'ty/ bag 500	VLP-01V 	Q'ty/ bag 500	VLS-01V 	Q'ty/ bag 1,000
2	600V	20A	VLR-02V 	Q'ty/ bag 500	VLP-02V 	Q'ty/ bag 500	VLS-02V (commonly used for 2-circuit housing and 4-circuit housing) 	Q'ty/ bag 1,000
3	600V	19A	VLR-03V 	Q'ty/ bag 500	VLP-03V 	Q'ty/ bag 500	VLS-03V (commonly used for 3-circuit housing and 6-circuit housing) 	Q'ty/ bag 1,000
4	600V	18A	VLR-04V 	Q'ty/ bag 500	VLP-04V 	Q'ty/ bag 500	VLS-02V 	Q'ty/ bag 1,000
			VLR-04VF (Without panel lock product) 	Q'ty/ bag 500	VLP-04V-1 	Q'ty/ bag 500	VLS-08V (commonly used for 4-circuit housing and 8-circuit housing) 	Q'ty/ bag 1,000
			VLR-04VN 	Q'ty/ bag 500	VLP-04VN-1 	Q'ty/ bag 500		

RoHS2 compliance

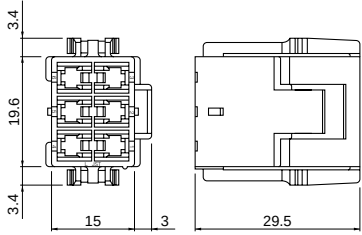



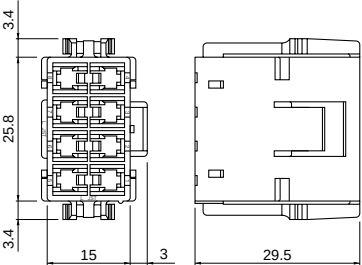



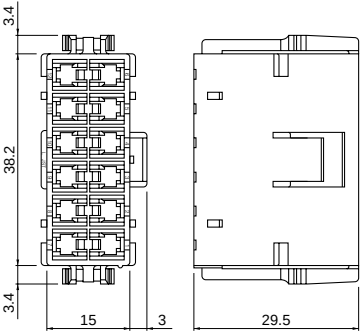



Note: 1. Contact JST for special products.

2. Contact JST for Glow Wire compliant connectors.

VL CONNECTOR

Housing

Material: Housing...PA 66, UL94V-0, white
Retainer...Glass-filled PA 66, UL94V-0, ivory

No. of circuits	Voltage rating	Current rating	Receptacle housing (for pin contact)		Plug housing (for socket contact)		Retainer	
6	600V	16A	VLR-06V 	Q'ty/ bag 500	VLP-06V 	Q'ty/ bag 500	VLS-03V (commonly used for 3-circuit housing and 6-circuit housing) 	Q'ty/ bag 1,000
					VLP-06V-1 			
8	600V	16A	VLR-08V 	Q'ty/ bag 100	VLP-08V 	Q'ty/ bag 200	VLS-08V (commonly used for 4-circuit housing and 8-circuit housing) 	Q'ty/ bag 1,000
					VLP-08V-1 			
12	600V	15A	VLR-12V 	Q'ty/ bag 100	VLP-12V 	Q'ty/ bag 100	VLS-12V 	Q'ty/ bag 1,000
					VLP-12V-1 			

RoHS2 compliance

Note: 1. Contact JST for special products.
2. Contact JST for Glow Wire compliant connectors.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JST:](#)

[VLR-03V-WGT4](#) [VLR-06V-WGT4](#) [VLR-06V-Q](#) [VLR-02V-WGT4](#) [VLR-04V-Q](#) [VLR-04VN\(SU\)](#) [VLR-04V-WGA1](#) [VLR-08V-Q](#) [VLR-09V](#) [VLP-03V-WGA1](#) [VLR-01VF\(SU\)](#)