

3900 Metal Lever Switches 16A 250Vac



- ▶ Metal lever switches
- ▶ Ratings up to 20A, 277V ac
- ▶ Single and double pole
- ▶ Choice of circuits including 3 position and momentary
- ▶ 6.3mm and solder terminals
- ▶ Guard option



16(4)A 250Vac T85 (3900 & 3950)
10(4)A 250Vac T85 (All other circuits)



UL CSA 20A 125/277Vac (ON-OFF Circuits)
UL CSA 16A 125/277Vac (Other Circuits)
UL CSA 7A 72Vdc, 14A 36Vdc
UL 250Vac 1hp, 125Vac 1/2hp
UL 85°C, file E45221, CSA file LR10990

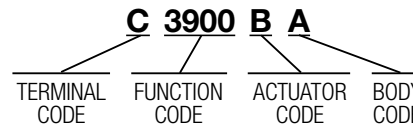
Inrush rating - Contact factory for details






RoHS compliant

Approvals and ratings vary with function.
3mm contact gap except where marked μ .
Technical data on pages 4 & 5.

ORDER FORMAT



▶	TERMINAL	▶	FUNCTION		▶	ACTUATOR
C	 6.3 x 0.8	Single pole	Double pole		B	 17.5 metal
		3900	ON - OFF	3950		
		3901	ON - OFF (momentary ON)	3951		
		3902	ON - OFF (momentary OFF)	3952		
		3910	ON - ON	3960		
S	 Screw & clamp	3911	ON - ON (momentary 1 side)	3961	D	 25.4 metal
		3920	ON - OFF - ON μ	3970		
		3921	ON - OFF - ON μ (momentary 1 side)	3971		
		3922	ON - OFF - ON μ (momentary 2 sides)	3972		
		3923	ON - OFF - ON μ (momentary 2 sides)	3973		
T	 Ø3.1 Solder	3924	ON - OFF - ON μ (momentary 1 side)	3974	E	 38.1 metal
		3925	ON - OFF - ON μ (momentary 1 side)	3975		
		3926	ON - OFF - ON μ (momentary 2 sides)	3976		
		3927	ON - OFF - ON μ (momentary 2 sides)	3977		
		3928	ON - OFF - ON μ (momentary 2 sides)	3978		
		3929	ON - OFF - ON μ (momentary 2 sides)	3979	F	 17.5 nylon Switches with F toggles have double pole bodies, regardless of circuit Metal toggle finish is nickel plate
		3930	ON - OFF - ON μ (momentary 2 sides)	3980		
		3931	ON - OFF - ON μ (momentary 2 sides)	3981		
		3932	ON - OFF - ON μ (momentary 2 sides)	3982		
		3933	ON - OFF - ON μ (momentary 2 sides)	3983		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bulgin:

[S3950BA](#) [T3921BA](#) [C3950CA](#) [T3900BA](#) [S3960BA](#) [S3911BA](#) [S3900BA](#) [S3910BA](#) [S3951BA](#)