

ACT20M-RTCI-CO-OLP-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image**ACT20M: The slim solution**

- Safe and space-saving (6 mm) isolation and conversion
- Quick installation of the power supply unit using the CH20M mounting rail bus
- Easy configuration via DIP switch or FDT/DTM software
- Extensive approvals such as ATEX, IECEx, GL, DNV
- High interference resistance

General ordering data

Version	Passive isolator, With galvanic isolation, Input : Temperature, PT100, thermocouple, Output : 4-20 mA
Order No.	1435590000
Type	ACT20M-RTCI-CO-OLP-S
GTIN (EAN)	4050118240641
Qty.	1 pc(s).

ACT20M-RTCI-CO-OLP-S

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	114.3 mm	Depth (inches)	4.5 inch
Height	112.5 mm	Height (inches)	4.429 inch
Width	6.1 mm	Width (inches)	0.24 inch
Net weight	80 g		

Temperatures

Storage temperature	-40 °C...85 °C	Humidity	40 °C / 93 % rel. humidity, no condensation
---------------------	----------------	----------	--

Probability of failure

MTBF	207 Years
------	-----------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1	SCIP	2f6dd957-421a-46db-a0c2-cf1609156924
------------	----------------	------	--------------------------------------

Input

Influence of the sensor cable resistance		Input measurement range	PT100 -200...+850 °C, Thermocouple type J -100...+1200°C, Thermocouple type K -180…+1372 °C
	< 0.002 Ω		
Line resistance in measuring circuit	50 Ω@ RTD (Pt100), 10 kΩ @ TC (J, K)	Number of inputs	1
Sensor		Temperature input range	Configurable, PT100: -200...+850 °C, min. measurement range 10°C (RTD), J: (-100...+1200 °C), K: (-180...+1372 °C), min. measurement range 50°C (TC)
	PT100 (2-/3-/4- wire), Thermocouples: J, K		

Output

Number of outputs	1	Output current	configurable, 4...20 mA, 20...4 mA
Supply voltage (output)	16.8 V...31.2 V	Type	passive, connected control must be active
Wire break detection		cold junction compensation	configurable internal or external cold-junction compensation (thermocouple)
	Yes, Configurable, 3.5 mA / 23 mA / none		

General data

Accuracy	absolute accuracy: < ±0.05 % of the measurement range, RTD (PT100) Basic accuracy: < ±0.1 °C of the measurement range, TC (J,K) Basic accuracy: < ±0.5 °C of the measurement range
Cold-junction compensation error	±(2.0 °C + 0.4 °C x Δt) Δt = inside temperature – ambient temperature
Configuration	DIP switch
Delivery state	Output: 4...20 mA (loop) // Sensor error detection: enabled // Output error level: downscale // Noise suppression: 50 Hz // Step response time: < 30 ms // Start temperature: -200 °C // End temperature: 0 °C

ACT20M-RTCI-CO-OLP-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Delivery state	Setting parameters	Output
	Configuration	4...20 mA (loop)
	Setting parameters	Sensor error detection
	Configuration	enabled
	Setting parameters	Output error level
	Configuration	downscale
	Setting parameters	Noise suppression
	Configuration	50 Hz
	Setting parameters	Step response time
	Configuration	< 30 ms
	Setting parameters	Start temperature
	Configuration	-200 °C
	Setting parameters	End temperature
	Configuration	0 °C
Galvanic isolation	2-way isolator	
Power consumption, max.	0.8 W	
Power consumption, typ.	0.5 W	
Rail	TS 35	
Step response time	Configurable, ≤ 30 ms, < 300 ms	
Temperature coefficient	RTD (PT100) ≤ 0.01 % of the measurement range/°C or 0.02 °C/°C, TC (J,K) 0.1 °C/°C	
Type of connection	Screw connection	
Voltage supply	Output loop powered, 6...35 V	

Insulation coordination

EMC standards	IEC 61326-1, NE 21	Galvanic isolation	2-way isolator
Insulation voltage	2.5 kV _{eff} / 1 min.	Pollution severity	2
Rated voltage	300 V _{eff}	Surge voltage category	II

Data for Ex applications (ATEX)

Installation location	Device installed in safe area, zone 2	Marking	II 3 G Ex nA IIC T4 Gc
-----------------------	---------------------------------------	---------	------------------------

Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

EMC conformity and approvals

EMC standards	IEC 61326-1, NE 21	Standards	IEC 61010-1
---------------	--------------------	-----------	-------------

Classifications

ETIM 6.0	EC002919	ETIM 7.0	EC002919
ETIM 8.0	EC002919	ECLASS 9.0	27-21-01-29
ECLASS 9.1	27-21-01-29	ECLASS 10.0	27-21-01-29
ECLASS 11.0	27-21-01-29	ECLASS 12.0	27-21-01-29

ACT20M-RTCI-CO-OLP-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Important note**

Product information

The ACT20M-RTCI-CO-OLP-S passive configurable temperature transducer isolates and converts analogue signals. An analogue RTD (Type Pt100) or TC (Type J, K) input signal is linearly converted into an analogue output signal and galvanically isolated. Power is supplied through the output measurement circuit (output-loop powered).

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E337701

Downloads

Approval/Certificate/Document of Conformity	DNV-GL certificate FM certificate IECEx certificate ATEX certificate Declaration of Conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Software	Runtime Software – DIP switch configuration tool
User Documentation	instruction sheet
Catalogues	Catalogues in PDF-format
Brochures	


ACT20M-RTCI-CO-OLP-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings

Connection diagram

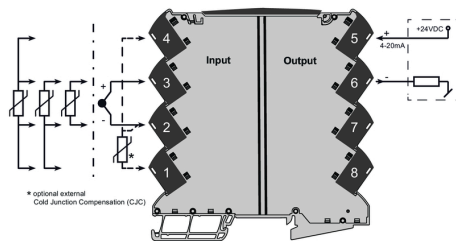


Dimensional drawing

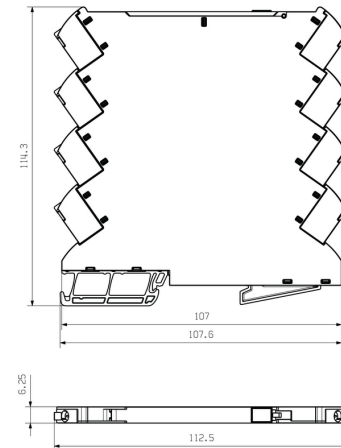

DIP switch setting

		Temperature range [°C]											
		PT100: -200...+800 °C @ TC: -100...+200 °C				TC: K: -80...+1372 °C							
		Min	S2	Max	S2	Min	S2	Max	S2	Min	S2	Max	S2
RTD & TC sensor type		PT100	1	PT100	1	PT100	1	PT100	1	PT100	1	PT100	1
PT100 2 wire		-200	1	800	1	-100	1	1372	1	-100	1	1372	1
PT100 3 wire		-100	1	800	1	-100	1	1372	1	-100	1	1372	1
PT100 4 wire		-100	1	800	1	-100	1	1372	1	-100	1	1372	1
RTD external CJC		-100	1	800	1	-100	1	1372	1	-100	1	1372	1
TC external CJC		-100	1	800	1	-100	1	1372	1	-100	1	1372	1
RTD external CJC		-100	1	800	1	-100	1	1372	1	-100	1	1372	1
TC external CJC		-100	1	800	1	-100	1	1372	1	-100	1	1372	1
Output		0	1	40	1	0	1	40	1	0	1	40	1
4-20 mA		0	1	40	1	0	1	40	1	0	1	40	1
20-4 mA		0	1	40	1	0	1	40	1	0	1	40	1
Sensor error detection		0	1	40	1	0	1	40	1	0	1	40	1
enable		0	1	40	1	0	1	40	1	0	1	40	1
Output error level		0	1	40	1	0	1	40	1	0	1	40	1
enable		0	1	40	1	0	1	40	1	0	1	40	1
Noise suppression		0	1	40	1	0	1	40	1	0	1	40	1
50 Hz		0	1	40	1	0	1	40	1	0	1	40	1
Response time		0	1	40	1	0	1	40	1	0	1	40	1
500 ms		0	1	40	1	0	1	40	1	0	1	40	1

example for DIP switch setting
(with ACT20M tool software)

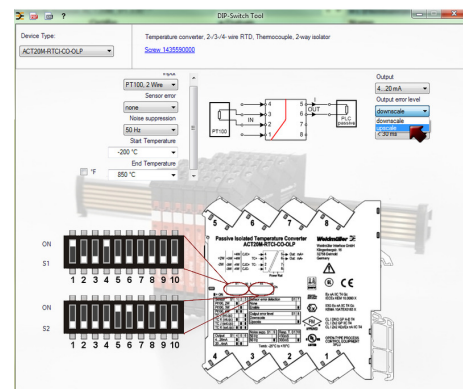

example for DIP switch setting
(with ACT20M tool software)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Weidmuller:](#)

[1435590000](#)