



AD3006 SERIES

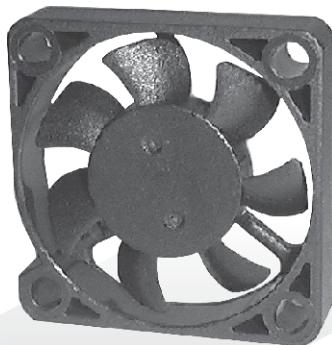

External Dimensions

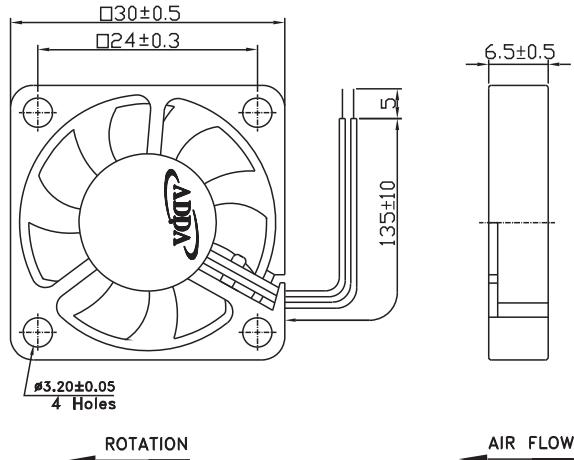

Frame: Plastic(UL:94V-0)
 Impeller: Plastic(UL:94V-0)
 Lead wire: UL1571AWG28

Specifications(Nominal)


*:Noise is measured at the distance of one (1)meter from the axis of intake.

Bearing type: ○=Ball ☆=Sleeve○=1B1S●=Hypro bearing

Frame size (mm)	Model No.	Bearing System	Rated Voltage (VDC)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)		Maximum Pressure (InAq)		*Noise Level (dB/A)	*Noise Weight (g)
		Type	(VDC)	(A)	(W)	(rpm)	(CMM)	(CFM)	(InAq)	(mmAq)	(dB/A)	(g)
30x30x06	AD0305DX-K70(X)	○ ●	5	0.050	0.250	6000	0.056	2.000	0.060	1.524	18.0	
	AD0305LX-K70(X)	○ ●	5	0.064	0.320	7500	0.067	2.400	0.080	2.032	22.0	
	AD0305MX-K70(X)	○ ●	5	0.103	0.515	9000	0.084	3.000	0.110	2.794	26.5	
	AD0305HX-K70(X)	○ ●	5	0.120	0.600	10500	0.099	3.500	0.150	3.810	32.0	6.0
	AD0312LX-K70(X)	○ ●	12	0.038	0.456	7500	0.067	2.400	0.080	2.032	22.0	
	AD0312HX-K70(X)	○ ●	12	0.064	0.768	10500	0.099	3.500	0.150	3.810	32.0	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
 (網頁上呈現產品軸承資訊均以參考為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

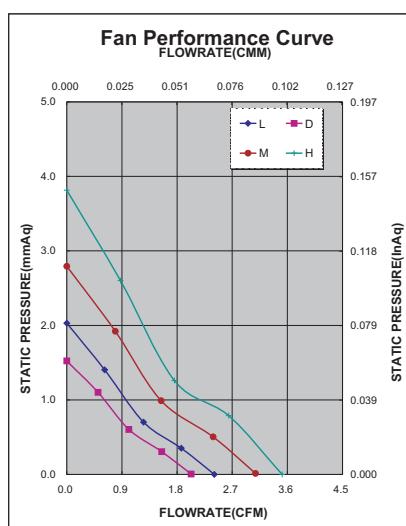

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓		✓							

*Safety approvals

✓	✓		✓	✓

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ADDA:](#)

[AD0312LX-K73-LF](#) [AD0312MX-K70\(TX\)](#)