


AD8025(IC) SERIES

External Dimensions

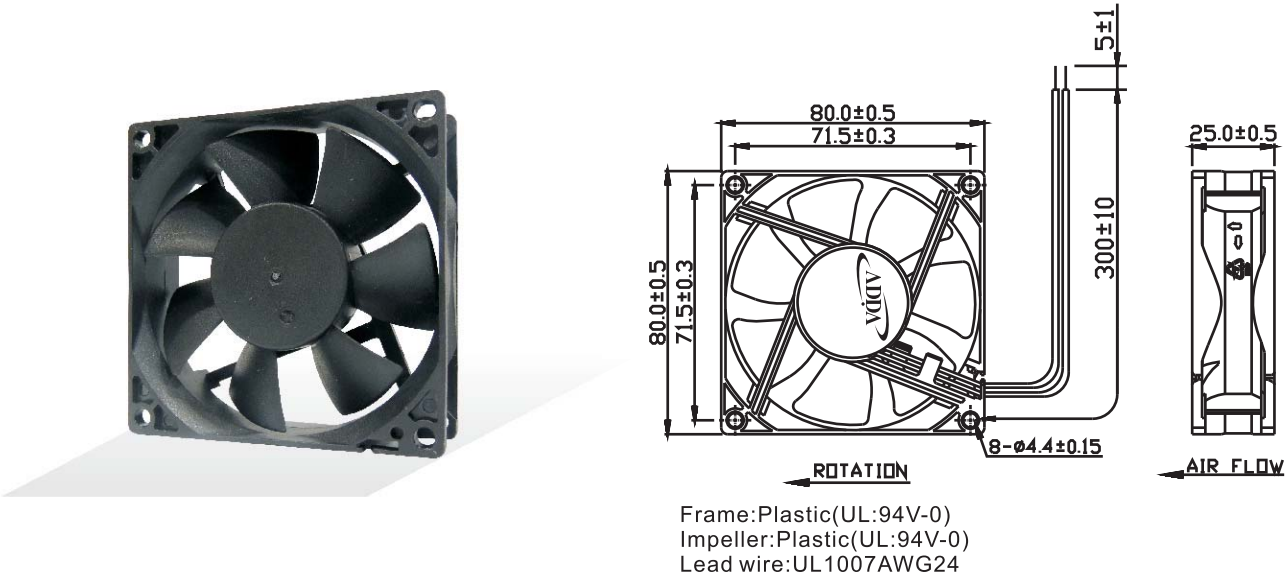

Specifications(Nominal)


*Noise is measured at the distance of one (1) meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System		Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
		Type						(CMM)	(CFM)	(InAq)	(mmAq)		
80x80x25	AD08012LB257B04	☉	●	12	0.04	0.48	2000	0.690	24.387	0.068	1.727	23.6	72.0
	AD08012MB257B04	☉	●	12	0.08	0.96	2400	0.875	30.922	0.112	2.844	30.0	
	AD08012HB257B04	☉	●	12	0.10	1.20	3000	1.053	37.241	0.157	3.987	35.8	
	AD08012UB257B04	☉	●	12	0.18	2.16	3600	1.281	45.290	0.216	5.486	42.0	
	AD08012XB257B04	☉	●	12	0.30	3.60	4500	1.608	56.830	0.350	8.890	48.1	
	AD08024MB257B04	☉	●	24	0.05	1.20	2500	0.875	30.922	0.112	2.844	30.0	
	AD08024HB257B04	☉	●	24	0.06	1.44	3000	1.053	37.241	0.157	3.987	35.8	
	AD08024UB257B04	☉	●	24	0.09	2.16	3600	1.281	45.290	0.216	5.486	42.0	
	AD08024XB257B04	☉	●	24	0.18	4.32	4500	1.608	56.830	0.350	8.890	48.1	

Bearing type: ☉=Ball ※=Sleeve ●=Hypro bearing

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

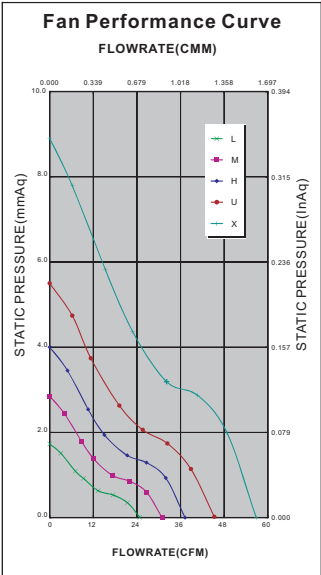

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓					✓		✓

*Safety approvals

✓	✓		✓	✓

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ADDA:

[AD08012HB257104\(01\)](#) [AD08012HB257304\(01\)](#) [AD08012MB257304](#) [AD08012UB257304](#) [AD08024LX257104](#)
[AD08024MX257104](#) [AD08012HB257104](#) [AD08012MB257104](#) [AD08012MX257104](#) [AD08024LB257104\(01\)](#)
[AD08012XB257304](#) [AD08024MB257104\(01\)](#) [AD08024HX257104](#) [AD08024HB257104\(01\)](#) [AD08024HB257104\(05H2\)](#)
[AD08024LB257104](#)