

ZMA Series

Subminiature Snap-acting Switches



Features/Benefits

- Reliable snap-acting mechanism
- Long electrical and mechanical life
- Compact size—Ideal when space is limited
- Various PCB terminals and actuators
- RoHS compatible & compliant

Typical Applications

- PCB detection switch
- Communication devices
- Testing equipment
- Security/Alarm systems
- Consumer electronics

UL61058-1



Specifications

CONTACT RATING: 3A @ 125 V AC 24 V DC

1 A @125 / 250 V AC 24 V DC

0.1A @ 125 V AC 60 V DC

ELECTRICAL LIFE: 300,000 cycles @ 0.1A / 10,000 cycles @ 3A.

MECHANICAL LIFE: 1,000,000 cycles.

INSULATION RESISTANCE: 100 M ohm min.

DIELECTRIC STRENGTH: 500 Vrms.

OPERATING TEMPERATURE: -40°C to 85°C

OPERATING FORCE: 80 or 150 grams.

* Low Level=conditions where no arcing occurs during switching, i.e., 0.4 VA max.
@ 20 V AC or DC max.

Materials

CASE/COVER: PBT

ACTUATOR: Button nylon 6/6

MOVABLE CONTACTS: Silver alloy or gold plated

STATIONARY CONTACTS: Silver alloy or gold plated

TERMINALS: Brass, silver plated.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages J-33 through J-35. For additional options not shown in catalog, consult Customer Service Center.

Z	M	A							C
Series									
ZMA SP, Mom.									
Electrical Rating									
See charts below									
Operating Force									
150 5.29 oz. / 150 grams									
080 2.82 oz. / 80 grams									
Actuator									
P00 Pin plunger									
S03 Simulated roller 5.8mm									
L30 Lever 20.5mm									
L11 Lever 7.2mm									
L08 Lever 3.95mm									
A03 Roller 1.3mm									
L04 Lever 3.9mm									
S06 Simulated roller 2.03mm									
S07 Simulated roller 0.75mm									
Terminations									
P PC Thru-hole									
L Left-footed, PC Thru-hole									
R Right-footed, PC Thru-hole									
E Solder									
K PC Thru-hole with retention feature									
			C SPDT						



Detect

Silver Contacts

Option Code	UL 1054	UL 61058-1		
00A	0.1A 60 V DC 0.1A 125 V AC	0.1A 60 V DC 0.1A 125 V AC	0.1A 125 V AC	
03A	3 A 125 V AC	3 A 125 V AC 3 A 24 V DC	3A 125 V AC	
01A		1 A 24 V DC 1 A 125 / 250 V AC		1 A 24 V DC 1 A 125 / 250 V AC

Gold Plated Contacts

Option Code	UL 1054	UL 61058-1		
G00	0.1A 60 V DC 0.1A 125 V AC	0.1A 60 V DC 0.1A 125 V AC	0.1A 125 V AC	
G03	3 A 125 V AC	3 A 125 V AC 3 A 24 V DC	3A 125 V AC	
G01		1 A 24 V DC 1 A 125 / 250 V AC		1 A 24 V DC 1 A 125 / 250 V AC




Dimensions are shown: mm
Specifications and dimensions subject to change

ZMA Series Subminiature Snap-acting Switches

SERIES

ZMA SUBMINIATURE SNAP-ACTING SWITCHES – SP MOMENTARY

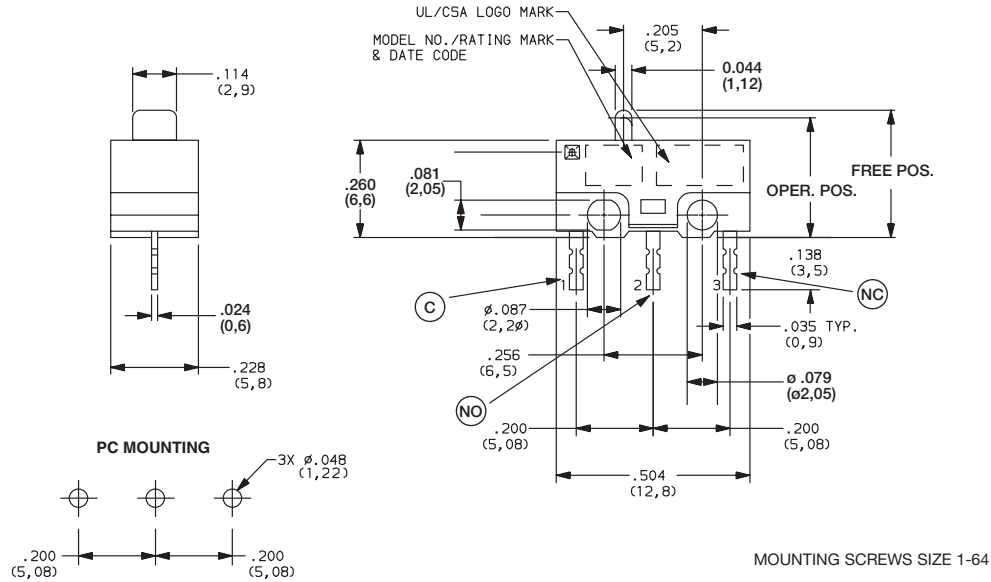

ELECTRICAL RATING

Silver Contacts

Option Code	UL c  1054	UL c  61058-1		
00A	0.1A 60 V DC 0.1A 125 V AC	0.1A 60 V DC 0.1A 125 V AC	0.1A 125 V AC	
03A	3 A 125 V AC	3 A 125 V AC 3 A 24 V DC	3A 125 V AC	
01A		1 A 24 V DC 1 A 125 / 250 V AC		1 A 24 V DC 1 A 125 / 250 V AC

Gold Plated Contacts

Option Code	UL c  1054	UL c  61058-1		
G00	0.1A 60 V DC 0.1A 125 V AC	0.1A 60 V DC 0.1A 125 V AC	0.1A 125 V AC	
G03	3 A 125 V AC	3 A 125 V AC 3 A 24 V DC	3A 125 V AC	
G01		1 A 24 V DC 1 A 125 / 250 V AC		1 A 24 V DC 1 A 125 / 250 V AC


* Note: See Technical Data in section N of this catalog for RoHS compliant and compatible definition and specifications.

All models  with all options.

Consult Customer Service center for availability and delivery of nonstandard ratings.

OPERATING FORCE

OPTION CODE	BASIC SWITCH OPERATING FORCE (OZ./GRAMS)
150	5.29 150
080	2.82 80



Dimensions are shown: mm
Specifications and dimensions subject to change

www.ck-components.com



E


Detect

ZMA Series


Subminiature Snap-acting Switches

ACTUATOR 


P00 PIN PLUNGER

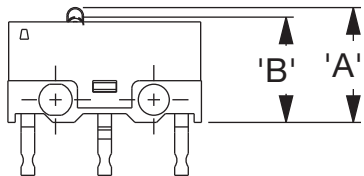


L08 LEVER
3.95MM

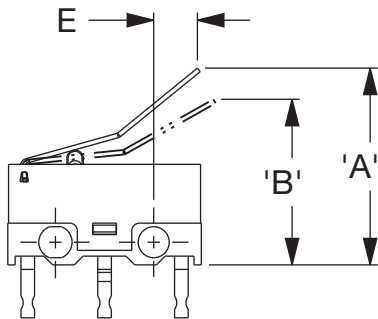


S03 SIMULATED ROLLER
5.8MM

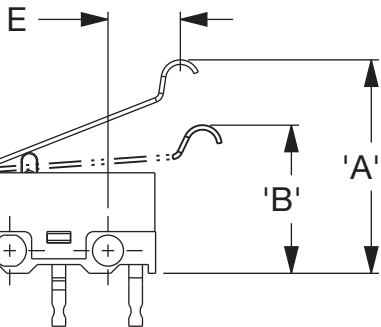


A03 ROLLER
1.3MM

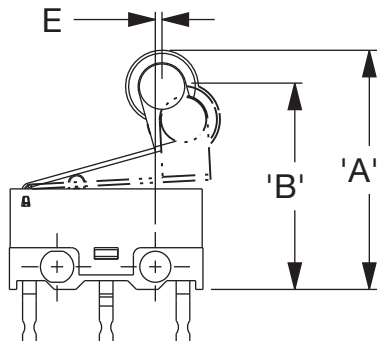


L30 LEVER
20.5MM

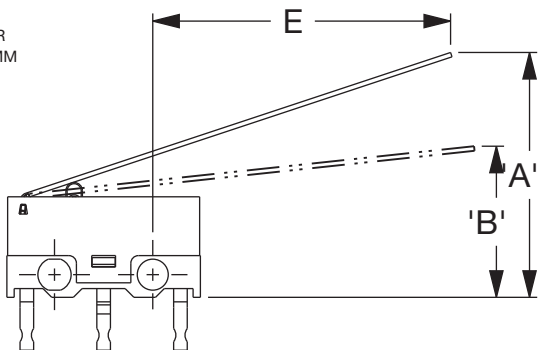


L04 LEVER
3.49MM

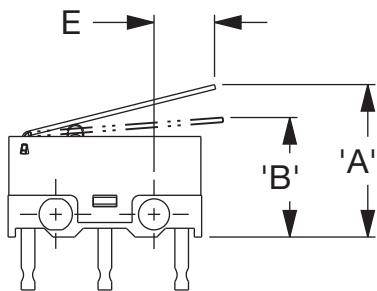


L11 LEVER
7.2MM

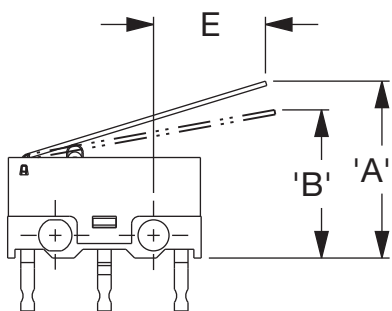

S06 SIMULATED ROLLER
2.03MM

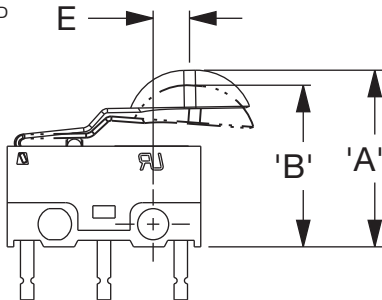

S07 SIMULATED ROLLER
0.75MM

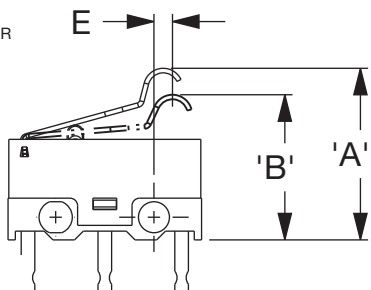

Third Angle
Projection

Dimensions are shown: mm


Specifications and dimensions subject to change



ZMA Series Subminiature Snap-acting Switches


SWITCH CHARACTERISTICS

CODE	OPER. FORCE MAX. (GRAMS)		REL. FORCE MIN. (GRAMS)		'A' FP MAX. (MM)	'B' OP MAX. (MM)	'C' PT MAX. (MM)	'D' OT MIN. (MM)	'E' MIN. (MM)
P00	80	150	21	35	7.35	6.9 ±0.3	0.62	0.2	
S03	25	43	5	7	14.2	9.8 ±0.9	3.5	0.7	5.41
L30 (80gf)	13	21	2	3	16.8	9.5 ±1.9	6.9	0.55	20.15
L30 (150 gf)	13	21	2	3	16.8	9.75 ±1.9	6.9	0.55	20.15
L11	25	39	4	6	11.7	8.68 ±1	4.4	0.6	7.33
L08	27	48	3	8	13.5	10.75 ±0.8	3.5	0.3	3.82
A03	34	65	6	10	16.55	13.65 ±1	3.9	0.5	0.56
L04	30	50	5	8	10.1	7.9 ±0.7	3.0	0.5	3.49
S06	33	49	5	11	12.43	10.7 ±0.8	1.43	1.25	1.97
S07	40	65	2	5	13.0	9.7 ±1	4.3	0.5	0.49

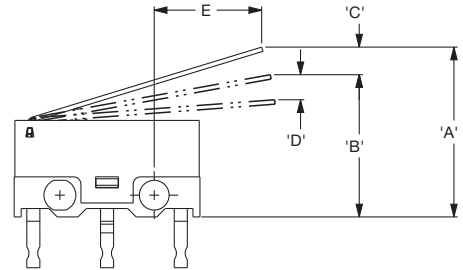


TERMINATIONS


P PC THRU-HOLE

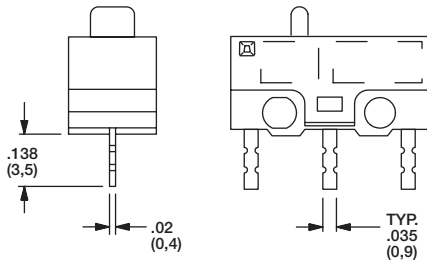


L LEFT FOOTED, PC THRU-HOLE

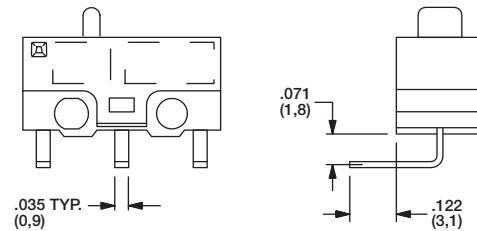


R RIGHT FOOTED, PC THRU-HOLE

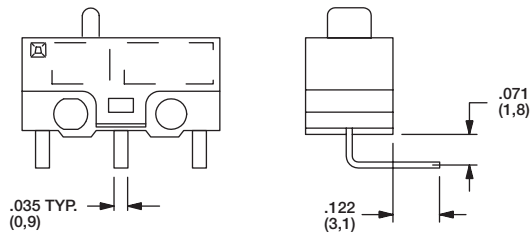

E SOLDER

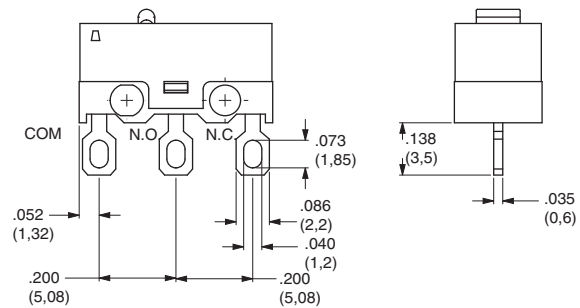

K PC THRU-HOLE WITH RETENTION FEATURE



Dimensions are shown: mm
Specifications and dimensions subject to change



E

Detect

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Switches:

<u>ZMA03A150S06RC</u>	<u>ZMA01A080L04PC</u>	<u>ZMA03A080L08LC</u>	<u>ZMA01A150L04PC</u>	<u>ZMA00A150L30EC</u>
<u>ZMA00A150P00KC</u>	<u>ZMAG00080L08PC</u>	<u>ZMA00A150L04KC</u>	<u>ZMAG00150L04LC</u>	<u>ZMA03A080L08RC</u>
<u>ZMA00A080S03EC</u>	<u>ZMA00A150S07EC</u>	<u>ZMA03A150L08KC</u>	<u>ZMA00A150L30RC</u>	<u>ZMAG03150S06PC</u>
<u>ZMA00A150S07LC</u>	<u>ZMA03A150A03PC</u>	<u>ZMA00A080P00KC</u>	<u>ZMA03A150S07EC</u>	<u>ZMA00A150L11LC</u>
<u>ZMA03A080S06PC</u>	<u>ZMA01A080A03PC</u>	<u>ZMAG00150S06RC</u>	<u>ZMA00A150P00EC</u>	<u>ZMAG00150S07LC</u>
<u>ZMA00A080L04KC</u>	<u>ZMA03A080L04PC</u>	<u>ZMA03A150S03PC</u>	<u>ZMA00A080S07RC</u>	<u>ZMA03A080L11LC</u>
<u>ZMA03A150P00EC</u>	<u>ZMAG00080S07PC</u>	<u>ZMA03A150L08RC</u>	<u>ZMA03A150L30EC</u>	<u>ZMAG00080L04EC</u>
<u>ZMA03A150S07RC</u>	<u>ZMAG00080L04LC</u>	<u>ZMA01A080L04EC</u>	<u>ZMA00A150L08RC</u>	<u>ZMA03A150L04KC</u>
<u>ZMA03A150L08LC</u>	<u>ZMAG03150S03PC</u>	<u>ZMAG03150L04EC</u>	<u>ZMA00A080L11LC</u>	<u>ZMA00A080A03EC</u>
<u>ZMA03A150S07PC</u>	<u>ZMA00A080S03RC</u>	<u>ZMA00A150A03EC</u>	<u>ZMA00A150L30LC</u>	<u>ZMA00A150L08PC</u>
<u>ZMA00A150S03RC</u>	<u>ZMAG00080S07EC</u>	<u>ZMA00A080S07EC</u>	<u>ZMAG00150L04EC</u>	<u>ZMA03A150S03EC</u>
<u>ZMAG00080A03EC</u>	<u>ZMAG00150L04PC</u>			