

ZMV Series Mini Size Snap-acting Switches

NEW



UL61058-1



Features/Benefits

- Compact size – ideal when space is limited
- High contact reliability to support from low range switching loads
- Adequate stroke setting for reliable & precision ON or OFF switching
- Pin plunger version can be actuated from an angle
- Internal spring design return – ensures the actuator is restored to the same position every time. These features yield consistent operation over the long life of these switches.
- IP67 for standalone switch except the metal terminal part; Full IP67 protection when potted with wire version
- RoHS compatible & compliant

Typical Applications

- Automotive: door latch, seat position detection, EV charging
- Medical
- Industrial
- Home appliances
- IoT devices

Specifications

CONTACT RATING: 3A 12VDC @ 100,000 cycles min.
3A 24VDC @ 50,000 cycles min.
3A 125/250VAC @ 10,000 cycles min.
0.01A 12/24VDC @ 1,000,000 cycles min.
0.01A 125/250VAC @ 1,000,000 cycles min.

MECHANICAL LIFE: 1,000,000 cycles min.

INSULATION RESISTANCE: 100 MΩ min.

DIELECTRIC STRENGTH: Min. 500VAC (50-60Hz)/minute between Live Parts

OPERATING TEMPERATURE: -40°C to 85°C

OPERATING FORCE: 150 gf max.

Materials

CASE: Nylon
COVER: Nylon
ACTUATOR BUTTON: PET+POM
MOVABLE CONTACTS: AG alloy (Gold plated if selected)
STATIONARY CONTACTS: AG alloy (Gold plated if selected)
TERMINALS: Brass

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

⚠ Sealing cap could possibly be damaged in case of contacts with oils or greases. Please try to avoid direct contact. If more support is needed, consult Customer Service Centre.

Build-A-Switch

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

Series ZMV	Electrical Rating 03A 3A 125/250VAC (Contact plated silver) G03 3A 125/250VAC (Contact plated gold)	Operating Force 150 150 grams	Actuator Type P00 Pin plunger T13 Hinged lever with lever length 13 mm T20 Hinged lever with lever length 20 mm S03 Simulated hinged roller lever length 15 mm L14 Leaf lever with lever length 14 mm L16 Simulated leaf roller lever length 16 mm L20 Leaf lever with lever length 20 mm	Terminations* P PC Thru-hole S Solder J Wire leads out bottom K Wire leads out right side W Wire leads out left side	Wire Type for J, K, W Terminations* NONE AVSS 0.3 mm ² (Default) 20 UL1007 20 AWG 22 UL1007 22 AWG 24 UL1007 24 AWG	Pillar Type or Mounting Style A0 Standard (No support post) B5 Pillar type B 5 mm B2 Pillar type B 2 mm C5 Pillar type C 5 mm C2 Pillar type C 2 mm F0 Pillar type F 1.5 mm	Circuitry C SPDT W SPST N.C. Y SPST N.O.
-----------------------------	--	--	--	---	---	--	---




NEW

ZMV Series Mini Size Snap-acting Switches


SERIES

ZMV MINI SIZE SNAP-ACTING SWITCHES

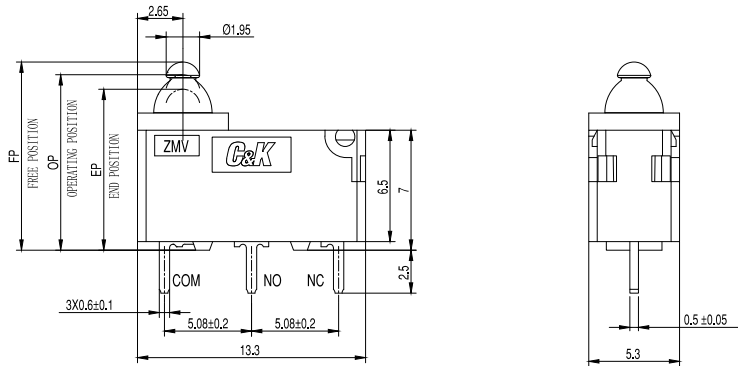


ACTUATOR TYPE


P00 PIN PLUNGER

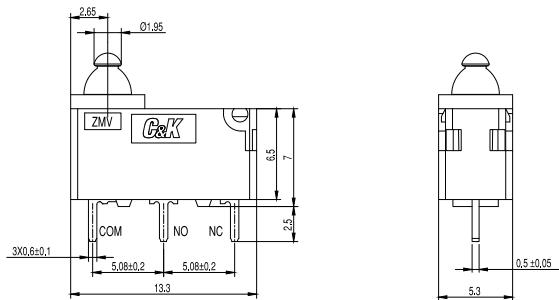


T13 HINGED LEVER WITH LEVER LENGTH 13 MM

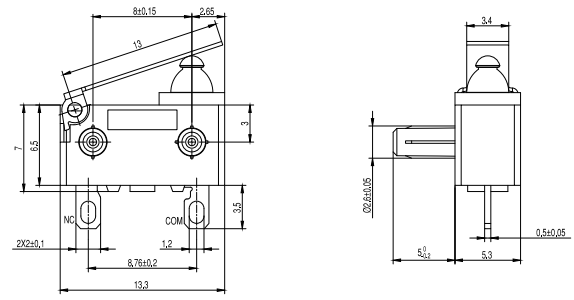

T20 HINGED LEVER WITH LEVER LENGTH 20 MM

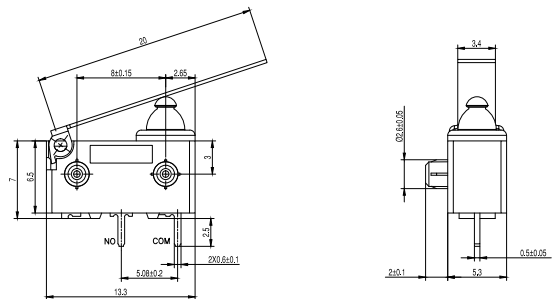

S03 SIMULATED HINGED ROLLER LEVER LENGTH 15 MM

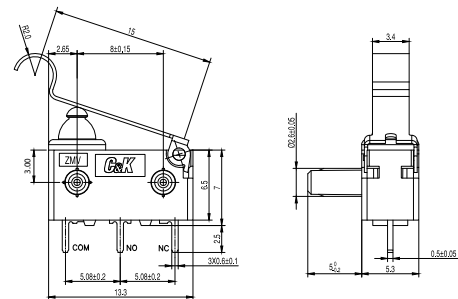

Snap-acting

C&K

3 Jun 21

J-31

Third Angle Projection
Dimensions are shown: mm
Specifications and dimensions subject to change


www.ckswitches.com

ZMV Series Mini Size Snap-acting Switches


NEW

ACTUATOR TYPE


L14 LEAF LEVER WITH LEVER LENGTH 14 MM

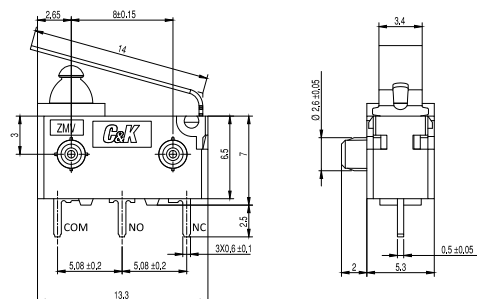

L16 SIMULATED LEAF ROLLER LEVER LENGTH 16 MM

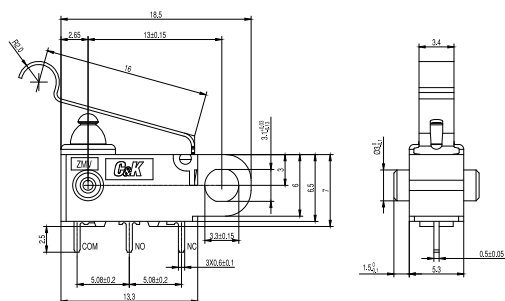


L20 LEAF LEVER WITH LENGTH 20 MM

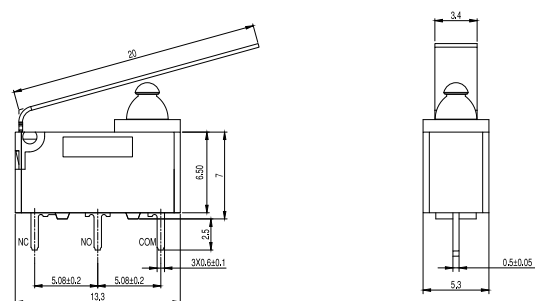


Snap-acting

TERMINATIONS


P PC THRU-HOLE

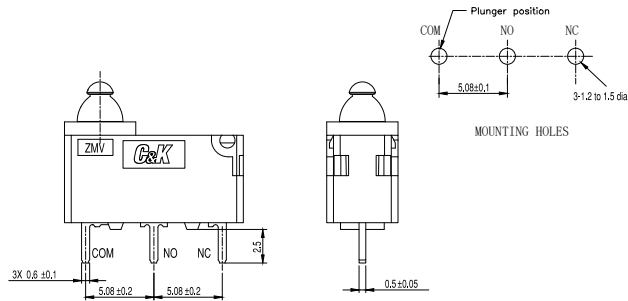

S SOLDER

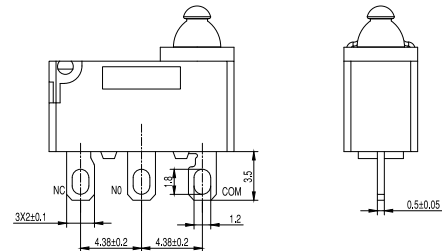


J WIRE LEADS OUT BOTTOM




Default wire:
COM: AVSS 0.3 MM² BLACK OR EQUIVALENT
NO: AVSS 0.3 MM² BLUE OR EQUIVALENT
NC: AVSS 0.3 MM² GRAY OR EQUIVALENT

K WIRE LEADS OUT RIGHT SIDE

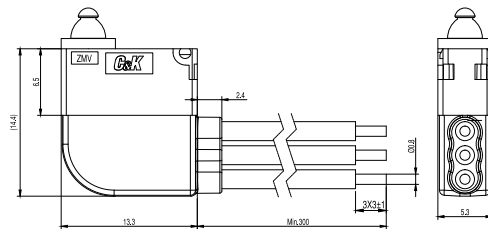

Default wire:
COM: AVSS 0.3 MM² BLACK OR EQUIVALENT
NO: AVSS 0.3 MM² BLUE OR EQUIVALENT
NC: AVSS 0.3 MM² GRAY OR EQUIVALENT

W WIRE LEADS OUT LEFT SIDE

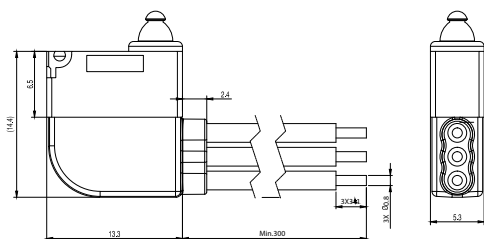

Default wire:


COM:	AVSS 0.3 MM ²	BLACK OR EQUIVALENT
NO:	AVSS 0.3 MM ²	BLUE OR EQUIVALENT
NC:	AVSS 0.3 MM ²	GRAY OR EQUIVALENT

ZMV Series Mini Size Snap-acting Switches


NEW

PILLAR TYPE OR MOUNTING STYLE


A0 STANDARD (NO SUPPORT POST)

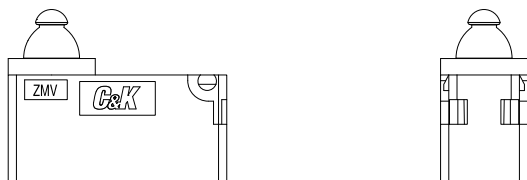


B5 PILLAR TYPE B 5 MM

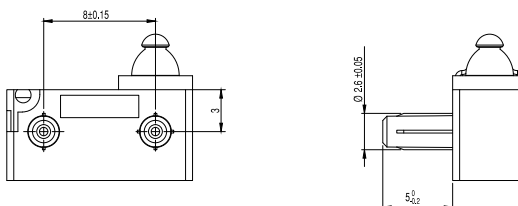


B2 PILLAR TYPE B 2 MM

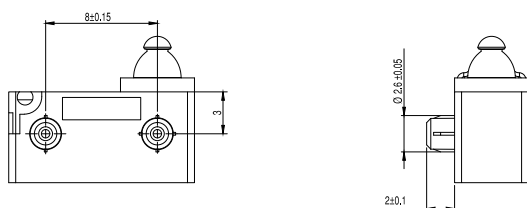


C5 PILLAR TYPE C 5 MM

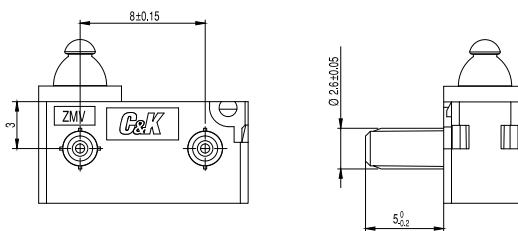

C2 PILLAR TYPE C 2 MM

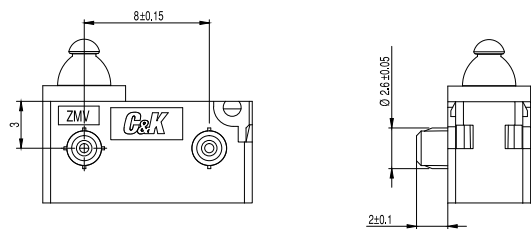

F0 PILLAR TYPE F 1.5 MM

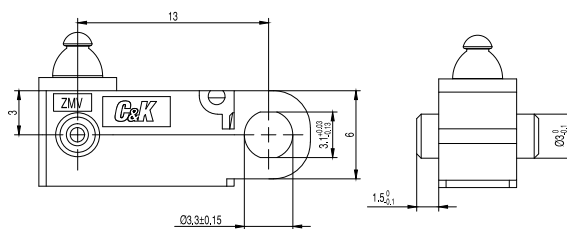










Snap-acting

NEW

ZMW Series

Mini Size Snap-acting Switches


SWITCH CHARACTERISTICS

SWITCH TYPE	PART SUFFIX	OF Max (gf)	FP Max (mm)	OP (mm)	EP Min (mm)	OT Min (mm)	MD Max (mm)	RF Min (gf)
ZMVXXX150P00XXXX	 Datum from Bottom	150	11.2	10.4 ± 0.2	9.1	1.1	0.25	20
	 Datum from Centre		7.2	6.4 ± 0.2	5.1			
ZMVXXX150T13XXXX	 Datum from Bottom	150	12.8	11.5 ± 0.5	10	1.0	0.5	13
	 Datum from Centre		8.8	7.5 ± 0.5	6			
ZMVXXX150T20XXXX	 Datum from Bottom	95	15.5	13.3 ± 0.8	11	1.5	0.8	6
	 Datum from Centre		11.5	9.3 ± 0.8	7			
ZMVXXX150S03XXXX	 Datum from Bottom	120	16.5	15.2 ± 0.5	13.5	1.2	0.5	10
	 Datum from Centre		12.5	11.2 ± 0.5	9.5			
ZMVXXX150L14XXXX	 Datum from Bottom	220	13.3	11.4 ± 0.5	9.8	1.1	0.5	38
	 Datum from Centre		9.3	7.4 ± 0.5	5.8			
ZMVXXX150L16XXXX	 Datum from Bottom	200	16.5	14.8 ± 0.5	12.9	1.4	0.5	38
	 Datum from Centre		12.5	10.8 ± 0.5	8.9			
ZMVXXX150L20XXXX	 Datum from Bottom	168	15.5	12.2 ± 0.8	9.9	1.5	0.8	30
	 Datum from Centre		11.5	8.2 ± 0.8	5.9			

OF: Operating force
EP: End position
RF: Release force

FP: Free position
OT: Overtravel

OP: Operating position
MD: Differential motion



Third Angle
Projection

Dimensions are shown: mm
Specifications and dimensions subject to change

C&K

3 Jun 21

J-35

www.ckswitches.com

Snap-acting

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Switches:

[ZMV03A150L14PCA0](#) [ZMV03A150P00PCA0](#) [ZMV03A150L16PCA0](#) [ZMV03A150L20PCA0](#) [ZMV03A150P00JCA0](#)
[ZMV03A150P00KYA0](#) [ZMV03A150P00WYA0](#) [ZMV03A150S03PCA0](#) [ZMV03A150T13PCA0](#) [ZMV03A150T20PCA0](#)