


T Series Subminiature Toggle Switches

Features/Benefits

- Compact size—small footprint
- Single and double pole models
- PC and panel mount options available
- RoHS compliant models available

Typical Applications

- Hand-held telecommunications
- Instrumentation
- Medical equipment

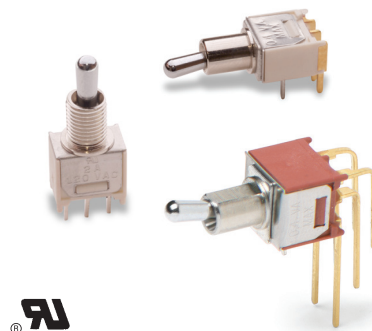

Specifications

CONTACT RATING: B contact material: 0.4 VA max. @ 20 V AC or DC max. Q contact material (TX01 models): 3 AMPS @ 120 V AC or 28 V DC. All other models: 2 AMPS @ 120 V AC or 28 V DC. See page F-42 for additional ratings.

ELECTRICAL LIFE: TX01 models: 60,000 make-and-break cycles at full load. All other models: 30,000 cycles.

CONTACT RESISTANCE: Below 20 m Ω typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE: $10^9 \Omega$ min.

DIELECTRIC STRENGTH: 1000 Vrms min. @ sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

SOLDERABILITY: Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).

NOTE: Any models supplied with P, R, Q, B or G contact material are RoHS compliant and compatible.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Materials

CASE: Glass filled nylon 6/6, flame retardant, heat stabilized or diallyl phthalate (DAP), (UL 94V-0) or glass filled nylon 4/6, flame retardant, heat stabilized.

ACTUATOR: Brass, chrome plated.

BUSHING: Brass, nickel plated.

HOUSING: Stainless steel.

SWITCH SUPPORT: Brass, matte-tin plated.

END CONTACTS: B contact material: Copper alloy, with gold plate over nickel plate. Q contact material: Coin silver, silver plated. See above for additional contact materials.

CENTER CONTACTS & TERMINALS: B contact material: Copper alloy, with gold plate over nickel plate. Q contact material: Copper alloy, silver plated. See page F-42 for additional contact materials.

TERMINAL SEAL: Epoxy.

HARDWARE: Nut & Locking Ring: Brass, nickel plated.

Lockwasher: Steel, nickel plated. Additional hardware available separately, see Section N.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages F-38 thru F-42. For additional options not shown in catalog, consult Customer Service Center. All models have epoxy terminal seal and are compatible with all "bottom-wash" PCB cleaning methods.

Switch Function

- T101** SPDT On-None-On
- T102** SPDT Off-None-On
- T103** SPDT On-Off-On
- T105** SPDT Mom.-Off-Mom.
- T107** SPDT On-Off-Mom.
- T108** SPDT On-None-Mom.
- T201** DPDT On-None-On
- T203** DPDT On-Off-On
- T205** DPDT Mom.-Off-Mom.
- T207** DPDT On-Off-Mom.
- T208** DPDT On-None-Mom.
- T211** DPDT On-On-On.

Actuator

- P3** Flatted, anti-rotation, .490" high
- S** .370" high
- K** Locking lever, round tip
- L1** .640" high
- M1** .220" high
- S1** .410" high
- M** .210" high
- L** .290" high

Bushing

- H** .220" high, threaded, flat
- H9** .220" high, unthreaded, flat
- CF** Splashproof, .310" high, threaded, flat
- D9** .260" high, unthreaded, keyway
- T** .310" high, threaded, flat
- T9** .310" high, unthreaded, flat
- TD** .260" high, threaded, keyway
- TK** .310" high, threaded, keyway
- Y** .220" high, threaded, keyway
- Y9** .220" high, unthreaded, keyway

Terminations

- A** Right angle, PC thru-hole
- AV** Vertical right angle, PC thru-hole
- C** PC Thru-hole
- V3** Vertical mount V-bracket
- Z** Solder lug
- W** Wire wrap

Contact Material


- B** Gold
- P** Gold, matte tin
- Q** Silver
- G** Gold over silver
- R** Gold over silver, matte-tin

Seal


- E** Epoxy

T Series Subminiature Toggle Switches


SWITCH FUNCTION

NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS			SCHEMATIC
		POS. 1	POS. 2	POS. 3	POS. 1	POS. 2	POS. 3	
								
		C&K marking on opposite side			C&K marking on opposite side			
SP	T101	ON	NONE	ON	2-3	N/A	2-1	
	T103	ON	OFF	ON	2-3	OPEN	2-1	
	T105	MOM.	OFF	MOM.				
	T107	ON	OFF	MOM.				
	T108	ON	NONE	MOM.				
	T102	OFF	NONE	ON	OPEN	N/A	3-1	SPST 


SPDT

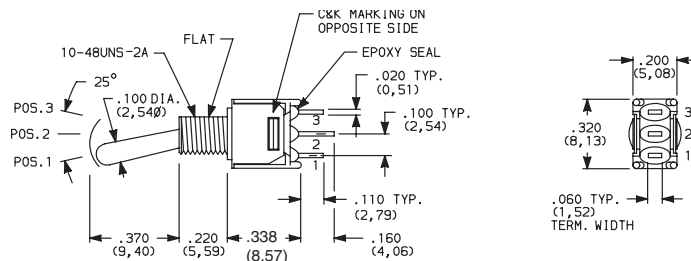

Part number shown: T101SHZQE

NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS			SCHEMATIC
		POS. 1	POS. 2	POS. 3	POS. 1	POS. 2	POS. 3	
								
		C&K marking on opposite side			C&K marking on opposite side			
DP	T201	ON	NONE	ON	2-3,5-6	N/A	2-1,5-4	
	T203	ON	OFF	ON	2-3,5-6	OPEN	2-1,5-4	
	T205	MOM.	OFF	MOM.				
	T208	ON	NONE	MOM.	2-3,5-6	N/A	2-1,5-4	
	T211*	ON	ON	ON.	2-3,5-6	2-3,5-4	2-1,5-4	
							DPDT	

DPDT

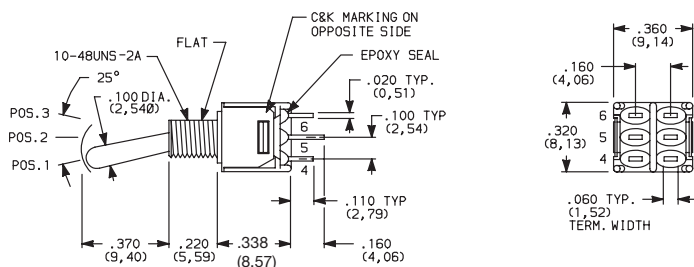

Terminal Nos.
For Reference Only

Part number shown: T201SHZQE

MOM. = Momentary
* Wiring for 3-way switch

All models with all options when ordered with G, L, R or Q contact material.



Dimensions are shown: Inches (mm)

Specifications and dimensions subject to change




15 Jan 21

T Series Subminiature Toggle Switches


ACTUATOR

M .210" HIGH




Standard with A, AV or V3 terminations.

S .370" HIGH




Standard with Z, C or W terminations.


M1 .220" HIGH
(with "T" bushing)




S1 .410" HIGH
(with "T" bushing)




L .290" HIGH



L1 .640" HIGH



P3 ANTI-ROTATION, FLATTED,
.450" HIGH




Available with T & T9 bushings only.
Dress nut part number 709901201
supplied standard with threaded bushing.

¹ Actuator shown with standard H bushing.
Subtract .040 (1,02) for TD and D9 bushings,
subtract .090 (2,29) for T, T9, TK, K9 &
CF bushings.

² Actuators shown with T, T9, TK & CF bushings,
add .050 (1,27) for TD and D9 bushings,
add .090 (2,29) for H, H9, Y & Y9 bushings.

All actuators have chrome finish (except K).

K LOCKING LEVER

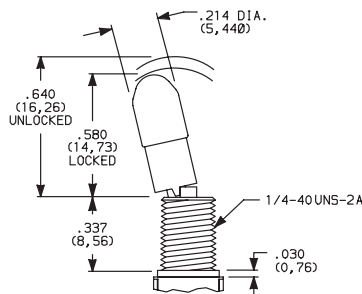

Not available with CF bushing option.

Bushing option code not required. Not available with TX05 & TX07 models.

Locking Positions



-01 & -02 Models
2 Position lock



-03 & -11 Models
3 Position lock





-08 Models
1 Position lock

K actuators have natural aluminum finish.

Keyway on right side. To prevent accidental actuation, toggles
must be lifted before being actuated. When released, toggles
again lock in place. Overtightening mounting nut may cause
actuator to bind.

BUSHING



H .220" HIGH THREADED, FLAT





H standard with C, W & Z terminations.

H9 standard with A, AV & V3 terminations.

Y .220" HIGH THREADED, KEYWAY



T .310" HIGH THREADED, FLAT



T9 .310" HIGH UNTHREADED, FLAT



Dimensions are shown: Inches (mm)

Specifications and dimensions subject to change

C&K

15 Jan 21




F

Toggle


T Series Subminiature Toggle Switches

BUSHING

TK .310" HIGH THREADED, KEYWAY




TD .260" HIGH THREADED, KEYWAY



D9 .260" HIGH UNTHREADED, KEYWAY


CF SPLASHPROOF, .310" HIGH THREADED, FLAT




IP67 Degree of protection.
Internal o-ring actuator seal and
external bushing seal washer standard.

Not available with K locking lever option.


10-48 BUSHING



With Standard Locking Ring




Without Locking Ring




Without Locking Ring

PANEL MOUNTING




Without Locking Ring




With Small Locking Ring

1/4 IN. BUSHING




Without Locking Ring




With Standard Locking Ring

TERMINATIONS

Z SOLDER LUG

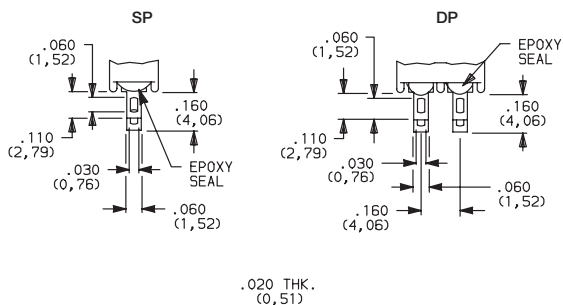

C PC THRU-HOLE

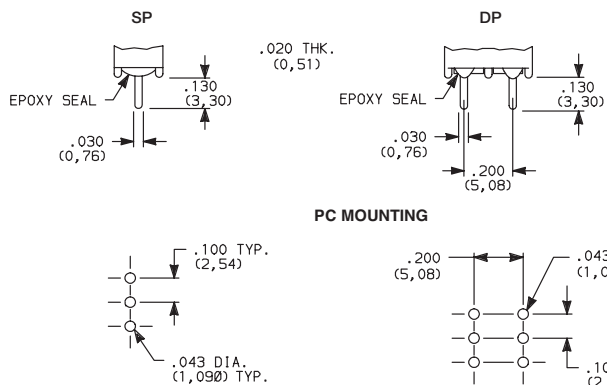


PC MOUNTING

Not available with P or R contact materials.

T102 - omit center hole.

W WIRE WRAP

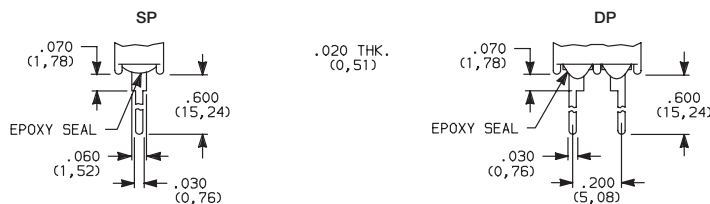

Third Angle
Projection

Dimensions are shown: Inches (mm)

Specifications and dimensions subject to change

www.ckswitches.com



C&K

15 Jan 21


T Series Subminiature Toggle Switches

TERMINATIONS

A RIGHT ANGLE, PC THRU-HOLE


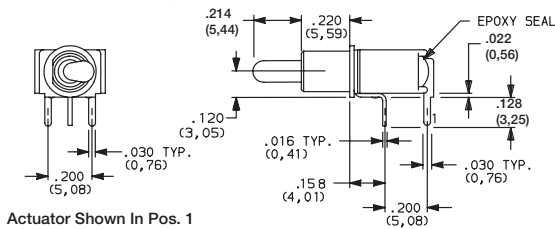


PC MOUNTING





T101MH9ABE
Horizontal Actuation
SPDT

A RIGHT ANGLE, PC THRU-HOLE


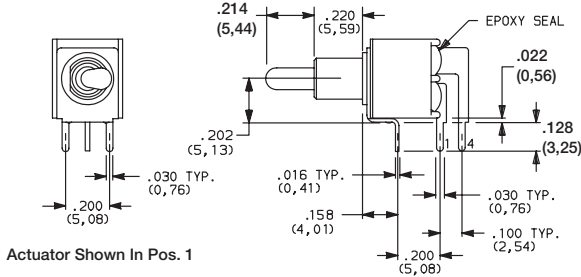


PC MOUNTING





T201MH9ABE
Horizontal Actuation
DPDT

AV VERTICAL RIGHT ANGLE, PC THRU-HOLE

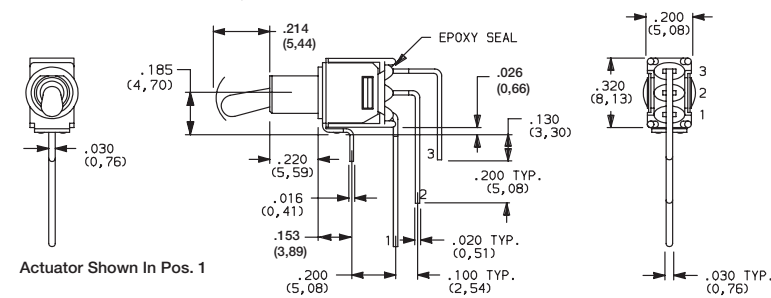



PC MOUNTING





T101MH9AVBE
Vertical Actuation
SPDT

NOTE: Terminal bend radii and lead-in manufacturing option.

AV VERTICAL RIGHT ANGLE, PC THRU-HOLE

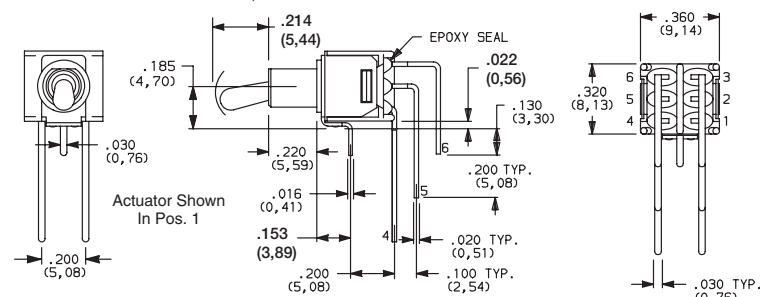



PC MOUNTING




T201MH9AVBE
Vertical Actuation
DPDT

NOTE: Terminal bend radii and lead-in manufacturing option.


V3 VERTICAL MOUNT, V-BRACKET

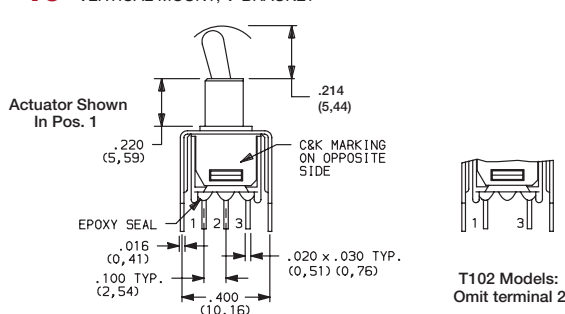

PC MOUNTING



T101MH9V3BE
SPDT





T Series Subminiature Toggle Switches

TERMINATIONS


V3 VERTICAL MOUNT, V-BRACKET



T201MH9V3BE
DPDT



PC MOUNTING



CONTACT MATERIAL

OPTION CODE	CONTACT MATERIAL	TERMINAL PLATING	RATINGS	
B	GOLD ¹	GOLD ¹	LOW LEVEL/ DRY CIRCUIT	0.4 VA MAX. @ 20 V AC OR DC MAX.
P		MATTE-TIN ⁶		
Q	SILVER ^{4,5}	SILVER ⁵	POWER	TX01 MODELS: 3 AMPS @ 120 V AC OR 28 V DC. ALL OTHER MODELS: 2 AMPS @ 120 V AC OR 28 V DC.
G	GOLD OVER SILVER ^{2,3}	GOLD ³	LOW LEVEL/DRY CIRCUIT OR POWER	TX01 MODELS: 0.4 VA MAX @ 20 V AC OR DC MAX. OR 3 AMPS @ 120 V AC OR 28 V DC. ALL OTHER MODELS: 0.4 VA MAX @ 20 V AC OR DC MAX. OR 2 AMPS @ 120 V AC OR 28 V DC.
R		MATTE-TIN ⁶		

* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

¹ CONTACTS & TERMINALS: Copper alloy, with gold plate over nickel plate.

² END CONTACTS: Coin silver, with gold plate over nickel plate.

³ CENTER CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.

⁴ END CONTACTS: Coin silver, silver plated.

⁵ CENTER CONTACT & ALL TERMINALS: Copper alloy, silver plated.

⁶ TERMINALS: Copper alloy, with matte-tin over nickel plate.


All models  with all options when ordered with R, G, or Q contact material.

B contact material standard with A, AV, V3 & W terminations.

Q contact material standard with C & Z terminations.


SEAL

E EPOXY SEAL



AVAILABLE HARDWARE

759D02000 SEALING BOOT



* Note: For use with S1 actuator style when combined with T, TK, and CF bushings.



Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change



15 Jan 21

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Switches:

[T101MH9V3BE](#) [T103SHV3QE](#) [T103SH9V3BE](#) [T101MHZQE](#) [T101STKCQE](#) [T201KZBE](#) [T103SHZQE](#)
[T203SHZQE](#) [T103SHCQE](#) [T101KZQE](#) [T201SHCQE](#) [T101MH9ABE](#) [T101MH9AVBE](#) [T101SHCQE](#) [T201MH9ABE](#)
[T101SHZQE](#) [T201SHZQE](#) [T102LHZQE](#) [T105SHZQE](#) [T107P3T9ALE](#) [T207SHZQE](#) [T207SHZBE](#) [T101MHZBE](#)
[T201LHCGE](#) [T211STKCQE](#) [T101STDCBE](#) [T101LHZQE](#) [T101MH9AVQE](#) [T101S1H9V3BE](#) [T201MH9AQE](#)
[T101L1H9CQE](#) [T101MHAVBE](#) [T103LTDZQE](#) [T103MY9CQE](#) [T105LHZQE](#) [T107MHZBE](#) [T208SH9AVBE](#)
[T101L1Y9V3BE](#) [T101M1H9ABE](#) [T101M1HCBE](#) [T101M1TAVBE](#) [T101MHV3PE](#) [T101MY9CBE](#) [T101S1HABE](#)
[T101S1T9ZBE](#) [T101S1TAGE](#) [T101S1TDZQE](#) [T101SCFABE](#) [T101SCFZBE](#) [T101SH9AGE](#) [T101SH9AVGE](#)
[T101SH9AVQE](#) [T101SHCGE](#) [T101SHV3BE](#) [T101SYCQE](#) [T102M1HZBE](#) [T102MH9AVBE](#) [T102MHAVBE](#)
[T102S1TZQE](#) [T102SHWBE](#) [T102SHWQE](#) [T103KAKE](#) [T103KCQE](#) [T103KZBE](#) [T103LTZQE](#) [T103M1H9AKE](#)
[T103M1TAGE](#) [T103MHABE](#) [T103MHCRE](#) [T103MTAGE](#) [T103P3TAGE](#) [T103P3TCBE](#) [T103S1HAQE](#)
[T103S1T9CQE](#) [T103S1T9V3QE](#) [T103S1TCQE](#) [T103S1YZBE](#) [T103SCFALE](#) [T103SH9ABE](#) [T103SH9CBE](#)
[T103SHWQE](#) [T103STAGE](#) [T103STZQE](#) [T105L1HZBE](#) [T105M1H9AVBE](#) [T101KCBE](#) [T102P3T9V3PE](#) [T101MYZBE](#)
[T101KABE](#) [T101KAVBE](#) [T101KAVQE](#) [T101KCQE](#) [T101KV3BE](#) [T101KZBE](#) [T101L1TKZBE](#) [T101LCFAVBE](#)
[T101LCFZBE](#) [T101LH9ABE](#) [T101LH9AQE](#) [T101LH9V3BE](#)