

## G3-D CONTROL GRIP

The rugged, ergonomically designed G3-D Control Grip can be configured with a rocker switch or a pushbutton at the top of the grip handle, and an operator presence trigger switch to help prevent inadvertent actuation. Top mount and bottom mount are both available as standard offerings.

The G3-D grip can be assembled with OTTO's JHM joystick, providing a variety of gating options including single axis, dual axis, friction held and omni-directional. Output choices include analog, PWM, USB, CANopen and CANbus.

The G3-D Control Grip works well in industrial, agricultural, mining, utility and construction applications such as aerial work platforms, scissor lifts, bucket trucks, telehandlers, trenchers and track trucks.



Top Mount G3-D with  
Rocker Switch and  
Operator Presence

### Features:

- Operator Presence Option
- Rocker or pushbutton switch options for the top of the handle
- Switches sealed to IP68S
- Top mount or bottom mount
- Can be assembled with an OTTO JHM joystick
- RoHS compliant



G3-D with Rocker  
Switch, Operator  
Presence and  
Top Mount JHM  
Joystick



G3-D with  
Pushbutton  
and Bottom Mount  
JHM Joystick

### Standard Characteristics/Ratings:

#### ELECTRICAL RATINGS:

##### P9 Switches

Electrical Rating @ 28 VDC	50mA Resistive Load
Electrical Life	1,000,000 Cycles

#### MECHANICAL RATINGS

##### P9 Switches

Mechanical Life	1,000,000 Cycles
-----------------	------------------

#### ENVIRONMENTAL:

Operating Temperature:	Units ° C	Min -40	Typ 20	Max 85
------------------------	--------------	------------	-----------	-----------

##### P9 Switches

Enclosure Design	ISO 20653, IP68S - Dusttight, Continuous Immersion, 1 Meter For 31 Minutes, Static During Test(s)
------------------	---

##### Grip

Enclosure Design	ISO 20653, IP65 - Dusttight, Water Jets, Static During Test(s)
------------------	--

#### MATERIALS:

Grip Halves, Faceplate	Thermoplastic, Glass Reinforced, Black
Lever, Rocker	Thermoplastic, Unfilled, Black
Boot	Elastomer, 40 Durometer, Black

### G3-D PART NUMBER CODE

**G3-D**      **X**  
Mounting

1. Top Mount
2. Bottom Mount

**XX**  
Configuration

11. Rocker (ON)-OFF-(ON) and Operator Presence
22. Rocker (ON)-OFF-(ON) and No Operator Presence
33. One Pushbutton and Operator Presence
44. One Pushbutton and No Operator Presence
55. No Pushbutton, No Rocker and Operator Presence
66. No Pushbutton, No Rocker and No Operator Presence


**X**      **X**  
PB Switch Configuration      Termination

1. None
2. Normally Open (NO)
3. 2 Circuit (NO/NC)\*
4. 2 Circuit (NO/NC)\*\*

\* for options 11 (Operator Presence), 44, 55  
\*\* for option 33


1. 20" Flying Leads 22 AWG

## HEAVY EQUIPMENT AND MATERIAL HANDLING GRIPS

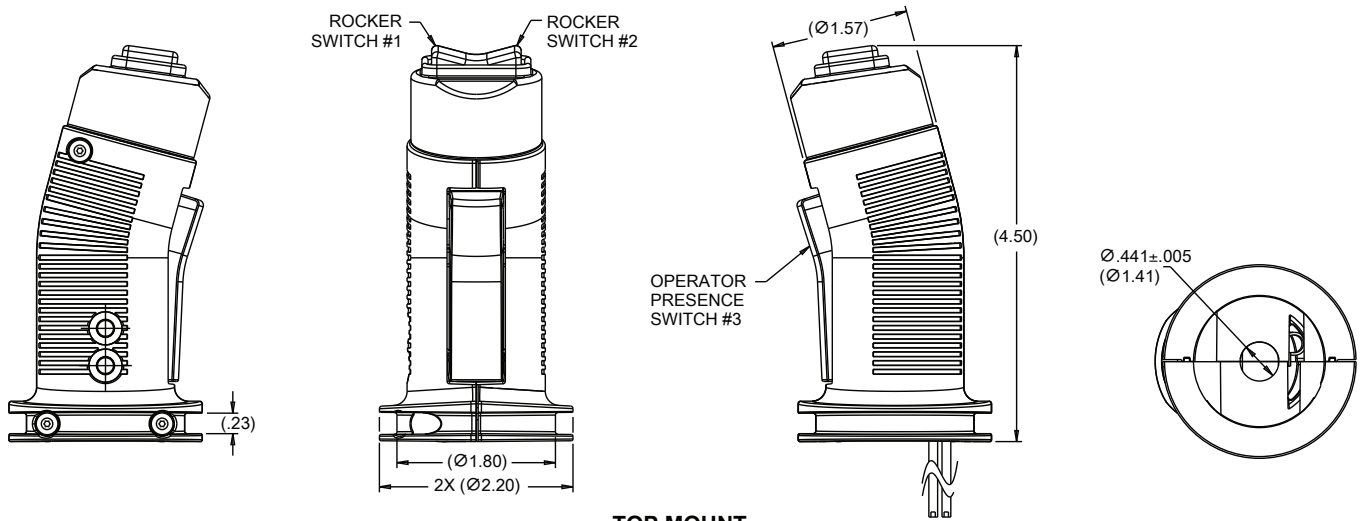


**TOP MOUNT  
ROCKER AND OPERATOR PRESENCE CONFIGURATION**

*Wires not shown in all views for clarity*

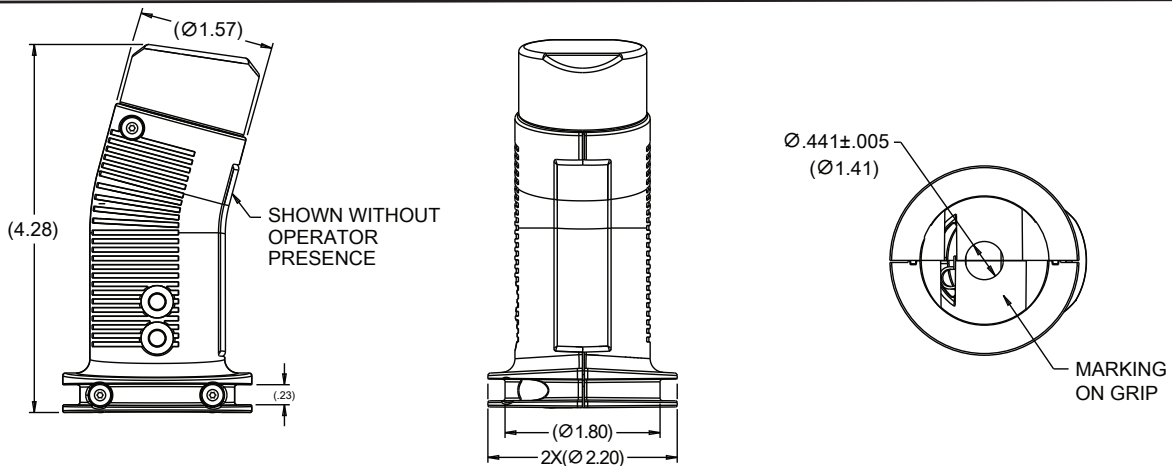

**TOP MOUNT  
NO SWITCHES CONFIGURATION**




*Wires not shown for clarity*

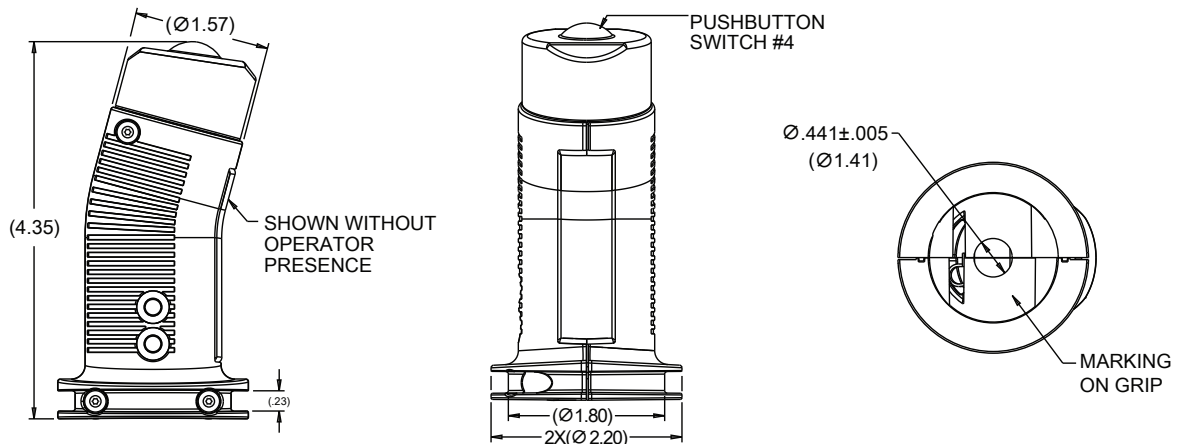

**TOP MOUNT  
ONE PUSHBUTTON CONFIGURATION**

*Wires not shown for clarity*

## HEAVY EQUIPMENT AND MATERIAL HANDLING GRIPS

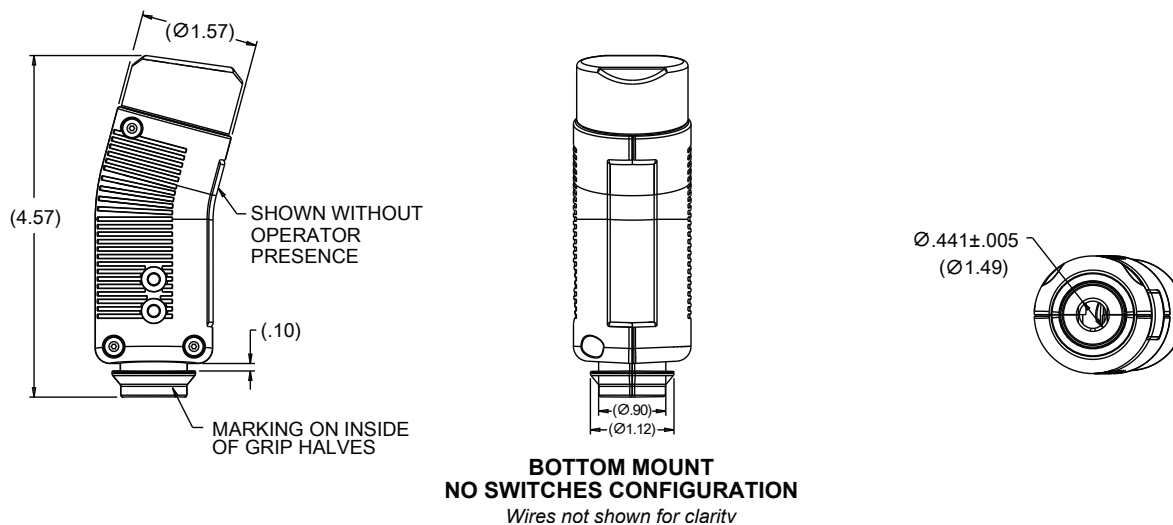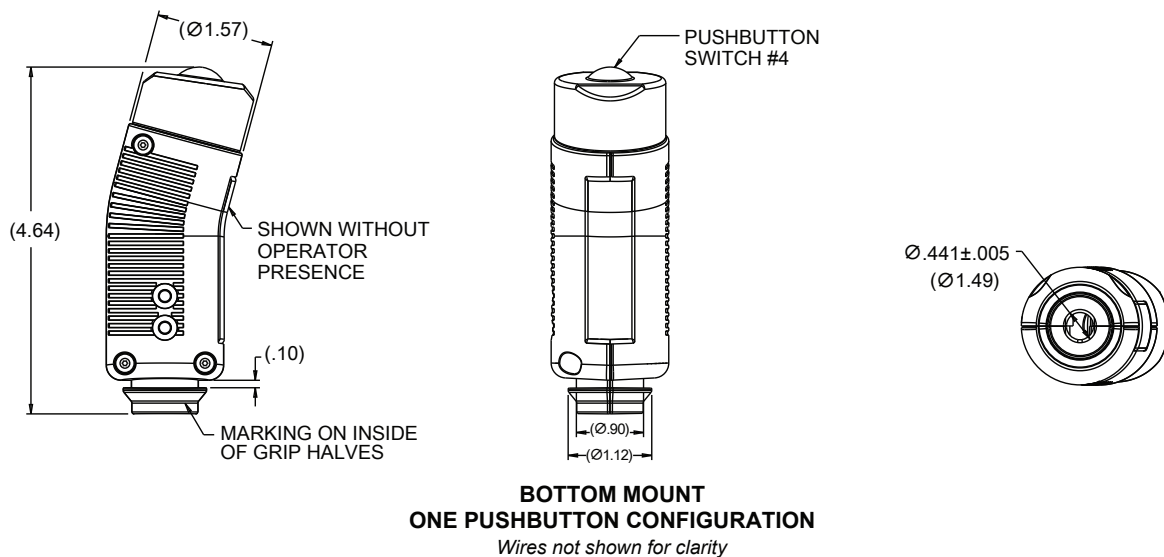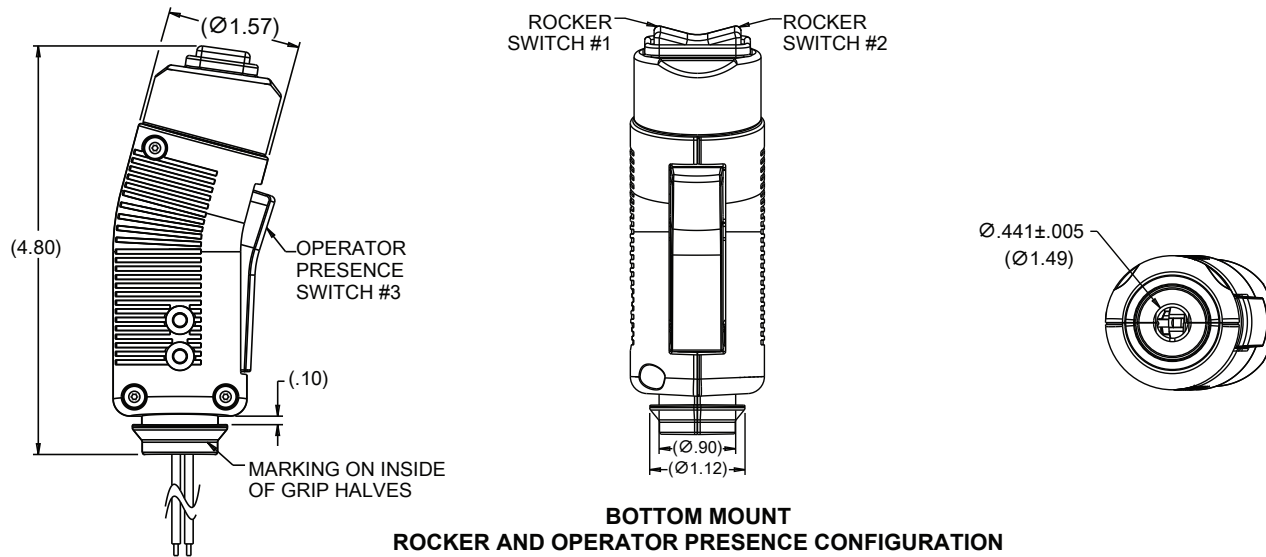

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

OTTO:

[G3-D11131](#) [G3-D12211](#) [G3-D13341](#) [G3-D14431](#)