

HALL EFFECT JOYSTICK WITH GRIP



The HJLG3 medium Hall effect joystick with grip allows you to easily create a standard, catalog codable solution that handles loads up to 250 lbs., has a compact behind-panel size, and a long life. Choose from a variety of grips, faceplates, outputs and gating options to match your application.

G3-A, G3-B, G3-C, G3-CK and G3-M Universal Grips, as well as the G3-D Control Grip, altogether offer nearly 50 standard faceplate design options.

Analog and digital outputs, CANopen, CANbus J1939, PWM, USB, and redundant sensor output selections are available. Gating options are single axis, single axis with center detent, dual axis, and various omnidirectional selections that include square smooth feel, on-axis and off-axis guided feel, square on-axis guided feel and center detent.

The HJLG3 serves agriculture, construction, off-highway, material handling and industrial equipment markets.

Features:

- **Compact design made for armrest and panel mounting**
- **Contactless Hall effect technology**
- **Mechanical life up to 6 million cycles**
- **Handles loads up to 250 lbs.**
- **Multiple output options, both analog and digital**
- **Electronics sealed to IP68S**
- **Redundant sensors available**
- **Variety of gating options**
- **Modular design**
- **Left or right handed**
- **RoHS compliant**
- **CANbus J1939 and CANopen outputs with integral Deutsch connector option**

JOYSTICK WITH GRIP OPTIONS

HJLG3
MEDIUM
JOYSTICK
WITH GRIP

HALL EFFECT JOYSTICK WITH GRIP

Standard Characteristics/Ratings:

ELECTRICAL:

Joystick

| | | | | |
|--|--------------|------|------|------|
| Rated at Vcc = 5V @ 20°C Load = 1 ma (4.7 KΩ) | Units | Min | Typ | Max |
| Supply Voltage | VDC | 4.5 | 5.0 | 5.5 |
| Output Voltage Tolerance at Center | VDC @ 5V Vcc | -.25 | N/A | +.25 |
| Output Voltage Tolerance at Full Travel | VDC @ 5V Vcc | -.25 | N/A | +.25 |
| Output at Full Travel +X, +Y Direction | VDC @ 5V Vcc | 4.25 | 4.50 | 4.75 |
| Supply Current per Die B=0, Vcc=5V, Iout=0 | mA | N/A | 10 | 12 |
| Output Impedance | kΩ | N/A | 1.0 | N/A |

Joystick CAN Open

| | | | | |
|-----------------|------|---|------|----|
| Supply Voltage | VDC | 9 | N/A | 32 |
| Node Identifier | Dec. | | 10 | |
| Baud Rate | B/S | | 125K | |

Joystick J1939

| | | | | |
|----------------|------|---|------|----|
| Supply Voltage | VDC | 9 | N/A | 32 |
| Source Address | Dec. | | 51 | |
| Baud Rate | B/S | | 250K | |

Grip Touch Switch*

| | | | | |
|---------------------|-----|------|----|------|
| Supply Voltage | VDC | 3.15 | NA | 5.5 |
| Output Active (Low) | VDC | NA | NA | 0.60 |
| Output Current Sink | mA | N/A | NA | 10 |

Operator Presence

| | | | | |
|-----------------------------|----------------------------|--|--|--|
| Electrical Rating | 10mA Resistive Load @ 5VDC | | | |
| Logic Level Electrical Life | 1,250,000 Cycles | | | |

Keypads

| | | | | |
|-----------------------|---------------------|--|--|--|
| Circuit Configuration | SPST N.O. | | | |
| Voltage | 1-32 VDC | | | |
| Current | 10-100 mA Resistive | | | |

P9 Switches

| | | | | |
|-----------------------------|----------------------------|--|--|--|
| Electrical Rating | 10mA Resistive Load @ 5VDC | | | |
| Logic Level Electrical Life | 1,250,000 Cycles | | | |

K1 Switches

| | | | | |
|-------------------|----------------------------|--|--|--|
| Electrical Rating | 10mA Resistive Load @ 5VDC | | | |
| Electrical Life | 100,000 Cycles | | | |

HPL Switches

| | | | | |
|--|--------------|------|------|------|
| Supply Voltage | VDC | 4.5 | 5.0 | 5.5 |
| Output Voltage (Button Up) | VDC @ 5V Vcc | 0.35 | 0.50 | 0.65 |
| Output Voltage (Button Down) | VDC @ 5V Vcc | 4.35 | 4.50 | 4.65 |
| Supply Current per Die B=0, Vcc=5V, Iout=0 | mA | N/A | 8.00 | 10 |
| Continuous Output Current | mA | -1.2 | N/A | 1.2 |

HTW & HTWF Switches

| | | | | |
|--|--------------|------|-----|------|
| Supply Voltage | VDC | 4.5 | 5.0 | 5.5 |
| Output Voltage Tolerance at Center | VDC @ 5V Vcc | -.15 | NA | +.15 |
| Output Voltage Tolerance at Full Travel | VDC @ 5V Vcc | -.25 | N/A | -.25 |
| Supply Current per Die B=0, Vcc=5V, Iout=0 | mA | N/A | N/A | 10 |

HTWM Switches

| | | | | |
|--|--------------|------|-----|------|
| Supply Voltage | VDC | 4.5 | 5.0 | 5.5 |
| Output Voltage Tolerance at Center | VDC @ 5V Vcc | -.25 | NA | +.25 |
| Output Voltage Tolerance at Full Travel | VDC @ 5V Vcc | -.25 | N/A | -.25 |
| Supply Current per Die B=0, Vcc=5V, Iout=0 | mA | N/A | N/A | 10 |

Standard Characteristics/Ratings (continued):

HTWS Switches

| | | | | |
|--|--------------|------|-----|------|
| Supply Voltage | VDC | 4.5 | 5.0 | 5.5 |
| Output Voltage Tolerance at Center | VDC @ 5V Vcc | -.25 | NA | +.25 |
| Output Voltage Tolerance at Full Travel | VDC @ 5V Vcc | -.25 | N/A | +.25 |
| Supply Current per Die B=0, Vcc=5V, Iout=0 | mA | N/A | N/A | 20 |

HTLT4 Switches

| | | | | |
|--|--------------|------|-----|------|
| Supply Voltage | VDC | 4.5 | 5.0 | 5.5 |
| Output Voltage Tolerance at Center | VDC @ 5V Vcc | -.25 | NA | +.25 |
| Output Voltage Tolerance at Full Travel | VDC @ 5V Vcc | -.25 | N/A | -.25 |
| Supply Current per Die B=0, Vcc=5V, Iout=0 | mA | N/A | 10 | 12 |

TC-5 Switches

| | | | | |
|------------------------------|------------------|--|--|--|
| Electrical Rating @ 1-32 VDC | 10-100mA | | | |
| Electrical Life | 3,000,000 Cycles | | | |

MECHANICAL:

| Joystick | Units | Min | Typ | Max |
|--|--|-----|-----|----------|
| Mechanical Life, Return to Center | 6,000,000 cycles; 1,000,000 cycles (Detent) 250,000 cycles with Friction | | | |
| Travel Angle | Degrees | 18 | 20 | 22 |
| Op. Force (w/Bellows) Low Force @ GRP, Ret. to Ctr. | Lbs. | .25 | .50 | 1.0 |
| Op. Force (w/Bellows) Low Force @ GRP, Ret. to Ctr., Detent | Lbs. | .50 | 1.0 | 1.5 |
| Op. Force (w/Bellows) Medium Force @ GRP, Ret. to Ctr. | Lbs. | .75 | 1.0 | 1.5 |
| Op. Force (w/Bellows) Medium Force @ GRP, Ret. to Ctr., Detent | Lbs. | 2.0 | 2.5 | 3.0 |
| Op. Force (w/Bellows) High Force @ GRP, Ret. to Ctr. | Lbs. | 1.5 | 2.0 | 2.5 |
| Op. Force (w/Bellows) High Force @ GRP, Ret. to Ctr., Detent | Lbs. | 2.0 | 4.0 | 6.0 |
| Op. Force (w/Bellows) @ GRP, Friction Y-Axis | Lbs. | 1.0 | 3.5 | 6.0 |
| Maximum Allowable Load @ 5" GRP | Lbs. | | | 250 Lbs. |

Keypads

| | | | | |
|-----------------|------------------|--|--|--|
| Mechanical Life | 3,000,000 Cycles | | | |
|-----------------|------------------|--|--|--|

P9 Switches

| | | | | |
|-----------------|------------------|--|--|--|
| Mechanical Life | 1,250,000 Cycles | | | |
|-----------------|------------------|--|--|--|

K1 Switches

| | | | | |
|-----------------|------------------|--|--|--|
| Mechanical Life | 1,000,000 Cycles | | | |
|-----------------|------------------|--|--|--|

HPL Switches

| | | | | |
|--|----------------|------|------|------|
| Mechanical Life Full Stroke Per Button | 100,000 Cycles | | | |
| Button Travel | IN | .135 | .150 | .160 |
| Operating Force 25°C @ .150" | Lbs. | N/A | 3.0 | 3.8 |
| Reset Force @ 25°C | Oz. | 5 | N/A | N/A |

HTW & HTWF Switches

| | | | | |
|---|------------------|-----|-----|-----|
| Mechanical Life, Full Forward to Full Back, Ret. to Ctr. | 3,000,000 Cycles | | | |
| Mechanical Life, Full Forward to Full Back, Friction | 250,000 Cycles | | | |
| Operating Force (HTW) 25°C at Top of Roller, Return to Ctr. | Oz. | 2.0 | 5.0 | 8.0 |
| Operating Force (HTWF) 25°C at Top of Roller, Friction | Oz. | 2.0 | 4.0 | 6.0 |
| Maximum Allowable (HTW & HTWF) Radial Load | Lbs. | N/A | N/A | 30 |

HTWM Switches

| | | | | |
|--|------------------|-----|-----|------|
| Mechanical Life, Full Forward to Full Back, Ret. to Ctr. | 3,000,000 Cycles | | | |
| Operating Force 25°C at Top of Roller | Oz. | 2.0 | 5.0 | 8.0 |
| Maximum Allowable Radial Load | Lbs. | N/A | N/A | 30.0 |

HALL EFFECT JOYSTICK WITH GRIP

| Standard Characteristics/Ratings (continued): | | | | |
|---|---|------------|------------|------------|
| HTWS Switches | | | | |
| Mechanical Life, Full Forward to Full Back | 3,000,000 Cycles | | | |
| Operating Force 25°C at Top of Roller | Oz. | 2.0 | 5.0 | 8.0 |
| Maximum Allowable Radial Load | Lbs. | N/A | N/A | 15.0 |
| HTLT4 Switches | | | | |
| Mechanical Life, | 3,000,000 Cycles | | | |
| Operating Force (w/Boot) Top of Roller @ 20°C | Oz. | 5.0 | 8.0 | 16.0 |
| Maximum Allowable Vertical Force on Button | Lbs. | N/A | N/A | 25.0 |
| Maximum Allowable Radial Force on Top of Knob | Lbs. | N/A | N/A | 25.0 |
| Maximum Allowable Torque on Button about Shaft Axis | In-Lbs | N/A | N/A | 5.0 |
| TC-5 Switches | | | | |
| Mechanical Life | 3,000,000 Cycles | | | |
| Operating Force | Oz. | 8.0 | 16.0 | 24.0 |
| ENVIRONMENTAL: | | | | |
| Joystick | Units | Min | Typ | Max |
| Operating Temperature | °C | -40 | 20 | 85 |
| Humidity | 96% RH, 70°C, 96 Hrs. | | | |
| Vibration | 10g, 24 Hz – 2KHz Swept Sinusoidal | | | |
| Electrical Enclosure Design | ISO 20653, IP6K8S – Dusttight, Continuous Immersion, 1 meter for 31 minutes, Stationary during test(s) | | | |
| EMI/RFI Withstand | Per SAE J1113 (Contact factory for details) | | | |
| Keypads | Units | Min | Typ | Max |
| Operating Temperature | °C | -40 | 20 | 85 |
| Faceplate and Side Keypad Enclosure Design | ISO 20653, IP6K8S – Dusttight, Continuous Immersion, 1 meter for 31 minutes, Stationary during test(s) | | | |
| P9 Switches | Units | Min | Typ | Max |
| Operating Temperature | °C | -40 | 20 | 85 |
| Electrical Enclosure Design | ISO 20653, IP6K8S – Dusttight, Continuous Immersion, 1 meter for 31 minutes, Stationary during test(s) | | | |
| K1 Switches | Units | Min | Typ | Max |
| Operating Temperature | °C | -30 | 20 | 85 |
| Electrical Enclosure Design | ISO 20653, IP6K8S – Dusttight, Continuous Immersion, 1 meter for 31 minutes, Stationary during test(s) | | | |
| HPL Switches | Units | Min | Typ | Max |
| Operating Temperature | °C | -40 | 20 | 85 |
| Electrical Enclosure Design | ISO 20653, IP6K8S – Dusttight, Continuous Immersion, 1 meter for 31 minutes, Stationary during test(s) | | | |
| HTW & HTWF Switches | Units | Min | Typ | Max |
| Operating Temperature | °C | -40 | 20 | 85 |
| Electrical Enclosure Design | ISO 20653, IP6K8S – Dusttight, Continuous Immersion, 1 meter for 31 minutes, Stationary during test(s) | | | |
| HTWM Switches | Units | Min | Typ | Max |
| Operating Temperature | °C | -40 | 20 | 85 |
| Electrical Enclosure Design | ISO 20653, IP6K8S – Dusttight, Continuous Immersion, 1 meter for 31 minutes, Stationary during test(s) | | | |
| HTWS Switches | Units | Min | Typ | Max |
| Operating Temperature | °C | -40 | 20 | 85 |
| Electrical Enclosure Design | ISO 20653, IP5K8S – Dust-protected, Continuous Immersion, 1 meter for 31 minutes, Stationary during test(s) | | | |
| HTLT Switches | Units | Min | Typ | Max |
| Operating Temperature | °C | -40 | 20 | 85 |
| Electrical Enclosure Design | ISO 20653, IP6K8S – Dusttight, Continuous Immersion, 1 meter for 31 minutes, Stationary during test(s) | | | |

| Standard Characteristics/Ratings (continued): | | | | |
|---|--|-----|-----|-----|
| TC-5 Switches | | | | |
| Operating Temperature | °C | -40 | 20 | 85 |
| Electrical Enclosure Design | ISO 20653, IP6K8S – Dusttight, Continuous Immersion, 1 meter for 31 minutes, Stationary during test(s) | | | |
| Grip | Units | Min | Typ | Max |
| Operating Temperature | °C | -40 | 20 | 85 |
| Electrical Enclosure Design | Unsealed | | | |
| MATERIAL: | | | | |
| Joystick | | | | |
| Plunger | Thermoplastic | | | |
| Housing | Thermoplastic, Black | | | |
| Bellows | Silicone, Black | | | |
| Cable | Output Option AA, DD, JJ & KK: 22 AWG (19 strands of 34 AWG TSC) PVC/Polyurethane Blend Outer Jacket Output Option BB, CC, EE, FF, GG & HH: 24 AWG (19 strands of 34 AWG TSC) PVC/Polyurethane Blend Outer Jacket | | | |
| Mounting Hardware | #10–24 x 3/4 Carriage Bolts Self Locking Nuts | | | |
| Keypads | | | | |
| Keypads | Silicone Rubber, Black | | | |
| Keypads, Lighted | Silicone Rubber, Black with White Graphic | | | |
| P9 Switches | | | | |
| Button | Thermoplastic | | | |
| Housing | Thermoplastic | | | |
| K1 Switches | | | | |
| Button | Thermoplastic | | | |
| Housing | Thermoplastic | | | |
| HTW & HTWF Switches | | | | |
| Button Top | Thermoplastic | | | |
| Housing | Thermoplastic | | | |
| HTWM Switches | | | | |
| Button Top | Thermoplastic | | | |
| Housing | Thermoplastic | | | |
| HTWS Switches | | | | |
| Button Top | Thermoplastic | | | |
| Housing | Thermoplastic | | | |
| HTLT4 Switches | | | | |
| Housing and Flange | Thermoplastic | | | |
| Bellows | Silicone, Black | | | |
| TC-5 Switches | | | | |
| Housing | PBT | | | |
| Keypad | Silicone Rubber | | | |
| Grip | | | | |
| Handle | Thermoplastic, Glass Reinforced, Black | | | |
| Faceplate | Thermoplastic, Glass Reinforced, Black | | | |
| Wires | 22 AWG, UL Style 1569 (8.5 in. long from bottom of joystick) | | | |
| Side Keypad Wires | 24 AWG, (26/.10TA) Insulation Diameter: .037 Insulation Type: PVC (40 in. from bottom of joystick) | | | |

***WARNING ON PERSONAL INJURY AND ANY USE AS SAFETY RELATED:**

Do not use these products as safety or emergency stop devices or in any application where failure of the product could result in personal injury. Failure to comply with these instructions could result in death or serious injury. OTTO Engineering Inc. makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does OTTO Engineering Inc. assume any liability whatsoever arising out of the application or use of any product. The product sold hereunder by OTTO has been subject to limited testing and should not be used in conjunction with detection of the presence of an operator on or with any equipment that is in any way safety related. OTTO does not accept any liability for incidental, consequential damages, personal injury or loss of life for any claims against the use of this product.


JOYSTICK WITH GRIP OPTIONS

HJLG3
MEDIUM
JOYSTICK
WITH GRIP


HALL EFFECT JOYSTICK WITH GRIP

HJLG3 OUTPUT CONFIGURATIONS


OPTION AA

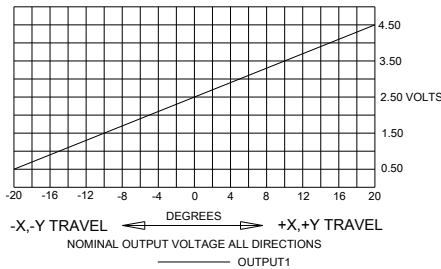


OPTION BB

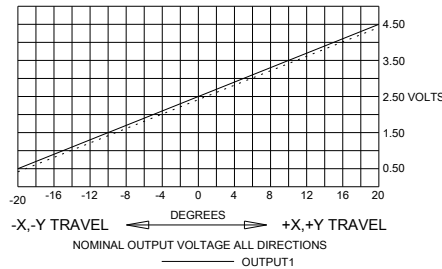


OPTION CC

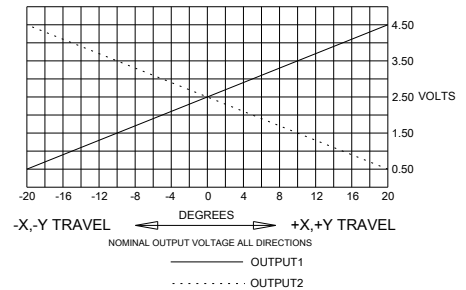


OPTION DD

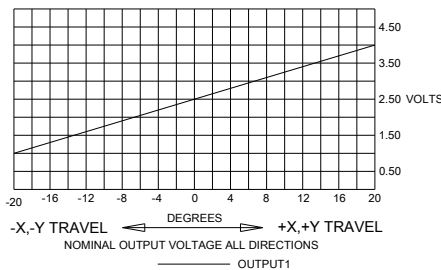


OPTION EE

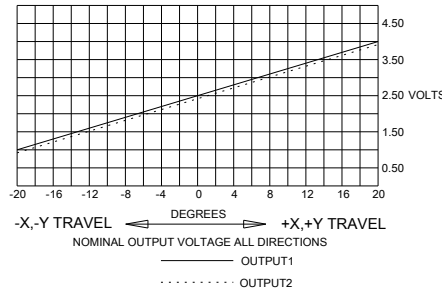


OPTION FF

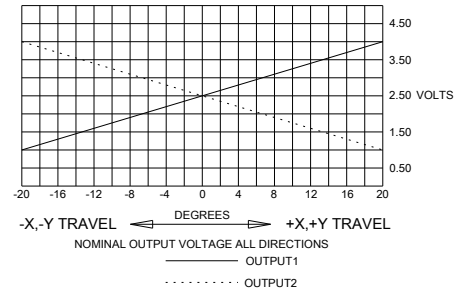


OPTION GG

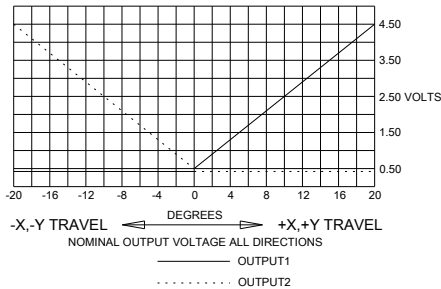


OPTION HH

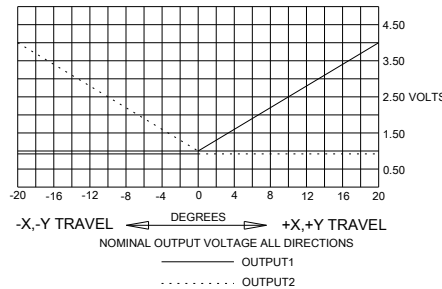


HTLT4 OUTPUT

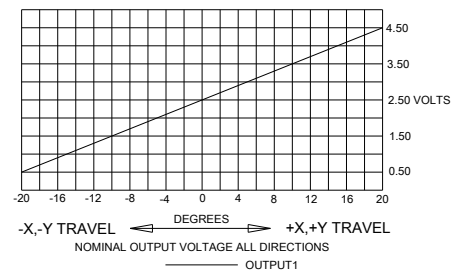


HTWM OUTPUT

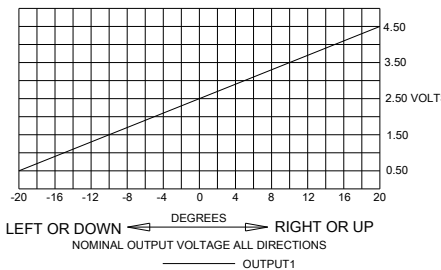


HTWS OUTPUT

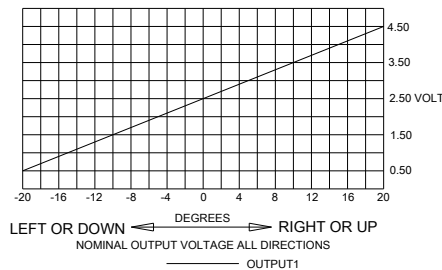


Z-AXIS SINGLE OUTPUT

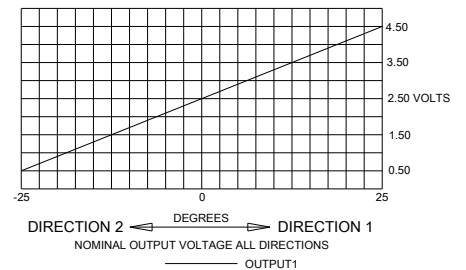


Z-AXIS DUAL OUTPUT

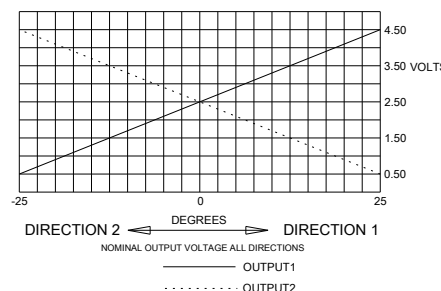

HTW OUTPUT

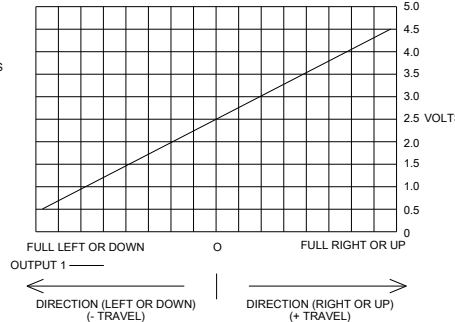





HPL OUTPUT

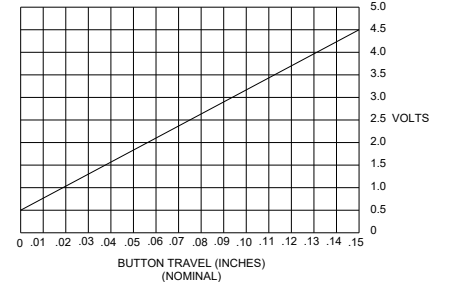

HALL EFFECT JOYSTICK WITH GRIP

OUTPUTS AND JOYSTICK SCHEMATICS



HJLG3-C with Faceplate shown

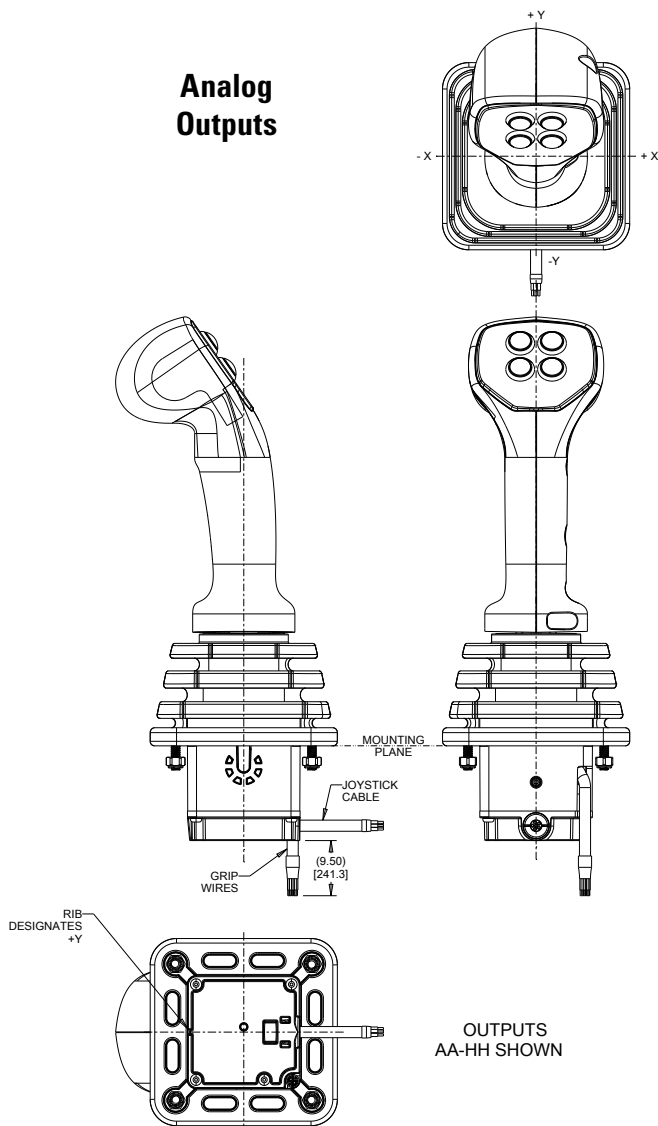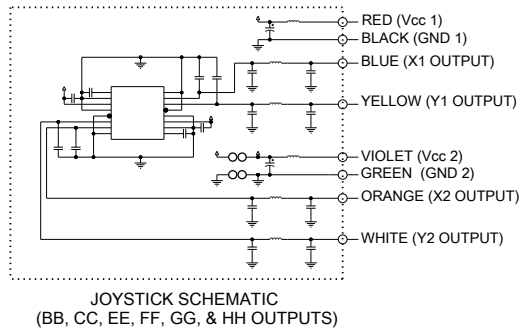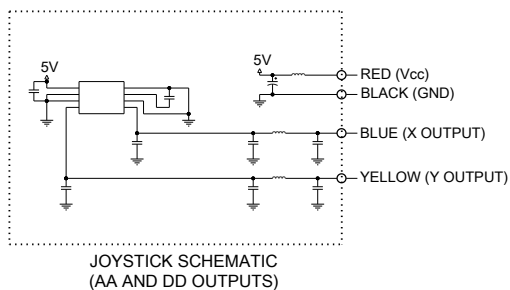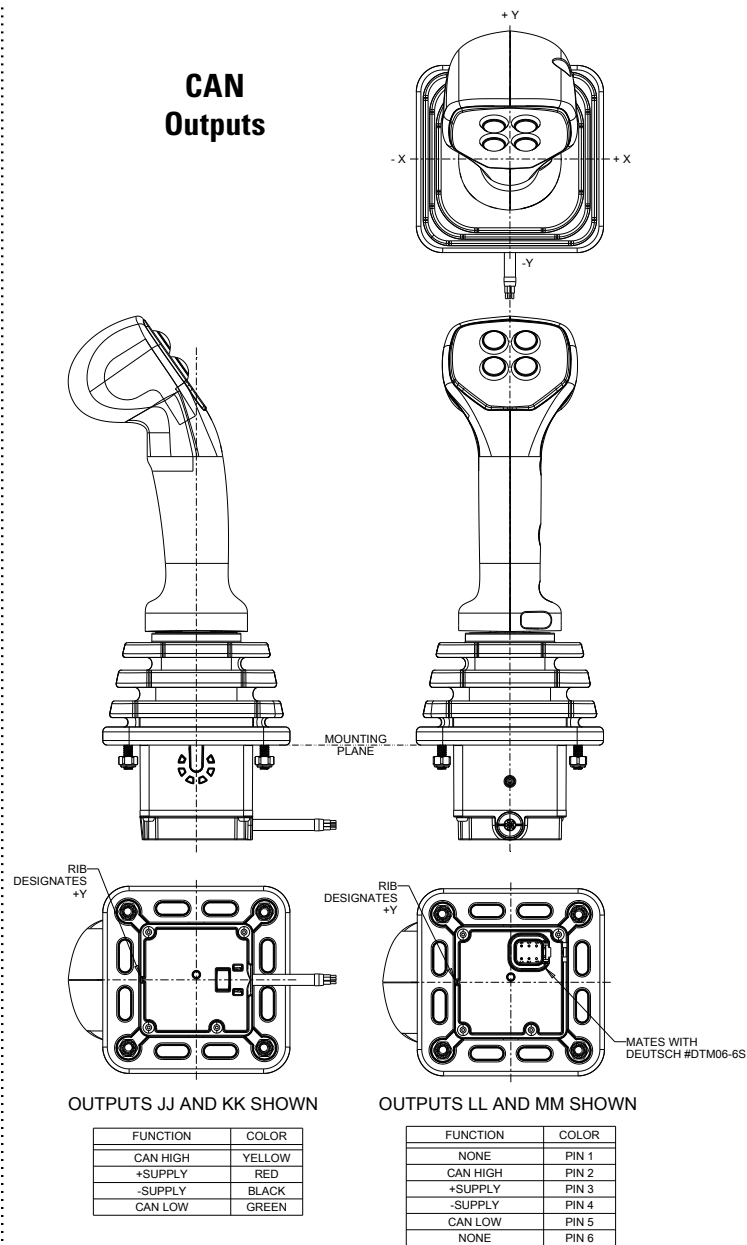Analog
OutputsCAN
Outputs

JOYSTICK WITH GRIP OPTIONS


HALL EFFECT JOYSTICK WITH G3-C UNIVERSAL GRIP

HJLG3-C DRAWINGS

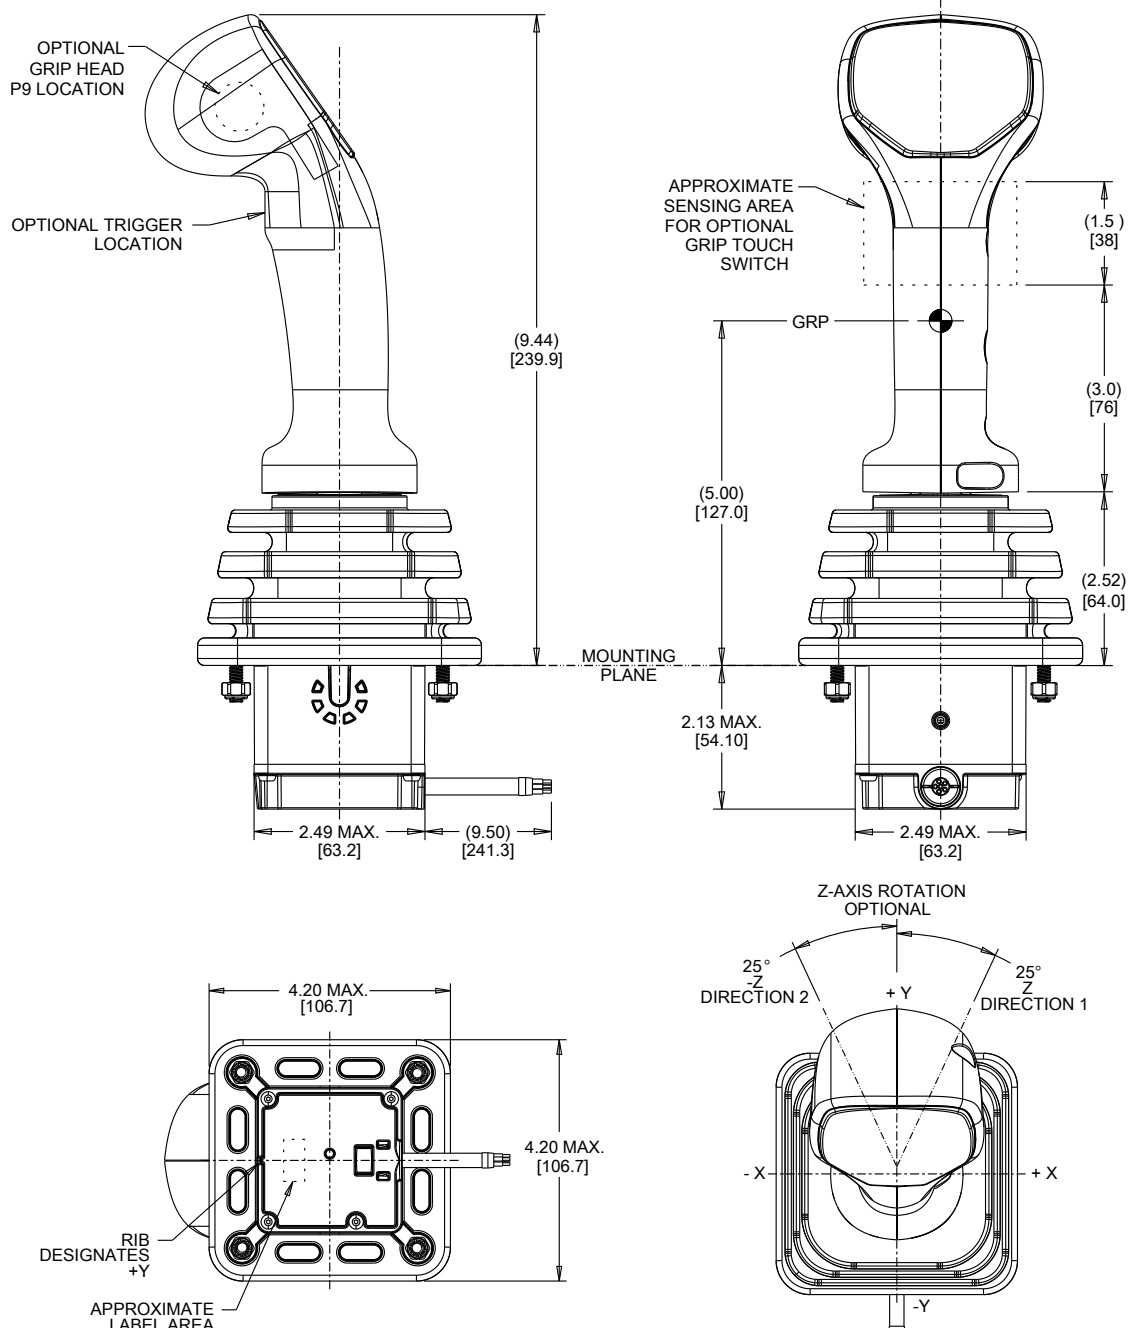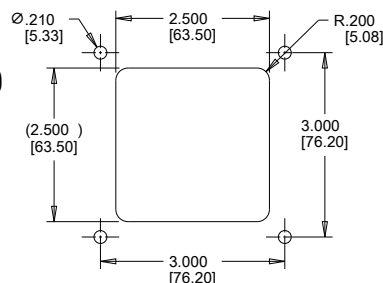
HJLG3 SUGGESTED
PANEL OPENING

HALL EFFECT JOYSTICK WITH G3-C UNIVERSAL GRIP

HJLG3-C TRIGGER OPTIONS

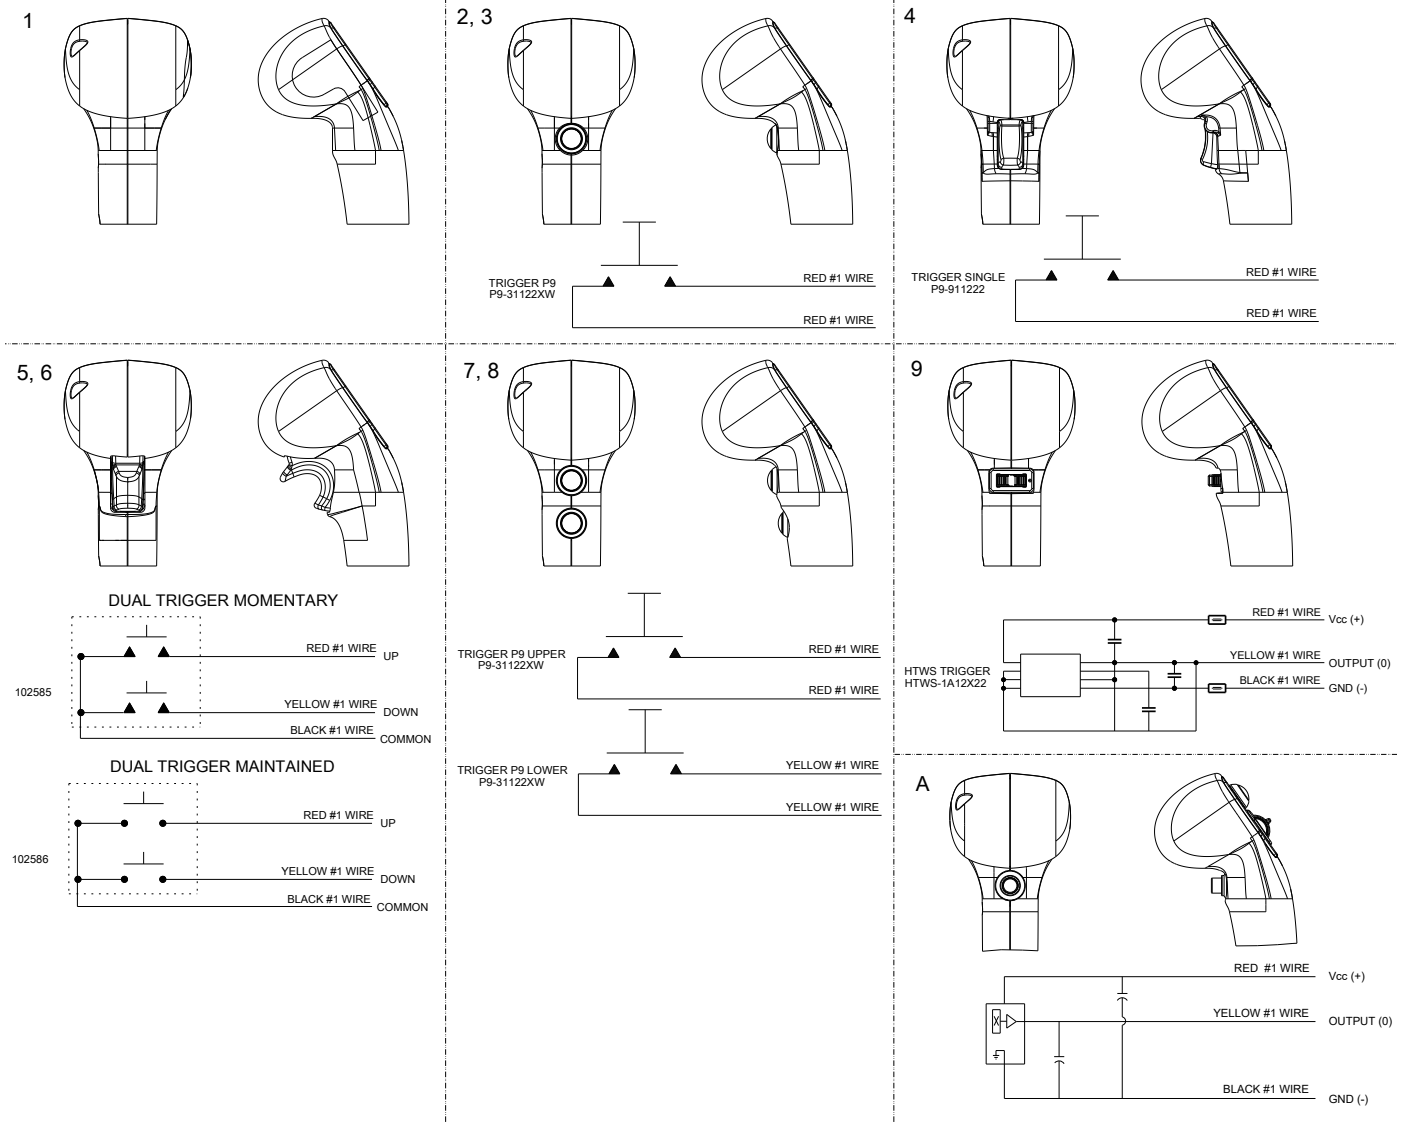

HJLG3-C HEAD PUSHBUTTON OPTIONS

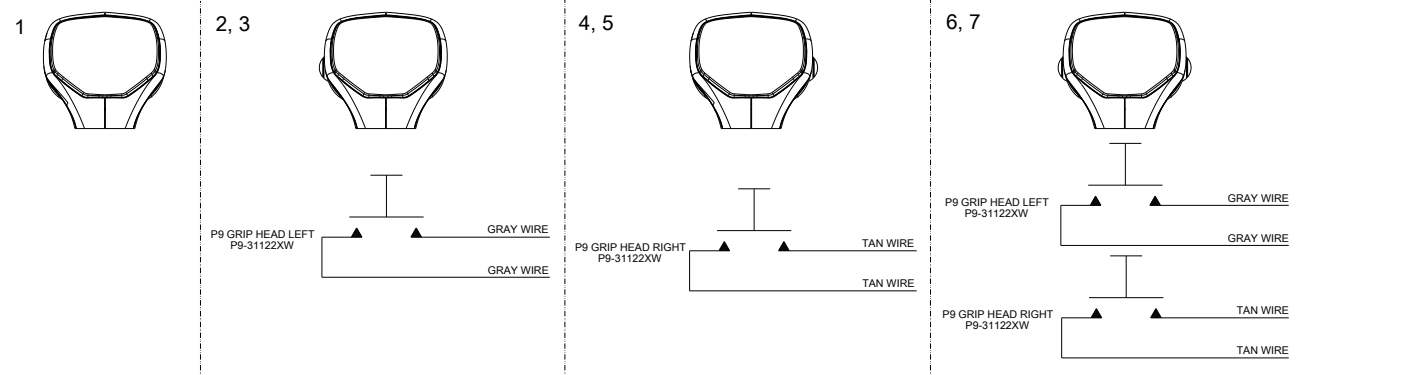


JOYSTICK WITH GRIP OPTIONS

HJLG3-C
MEDIUM
JOYSTICK
WITH GRIP









HALL EFFECT JOYSTICK WITH G3-C UNIVERSAL GRIP

HJLG3-C FACEPLATES

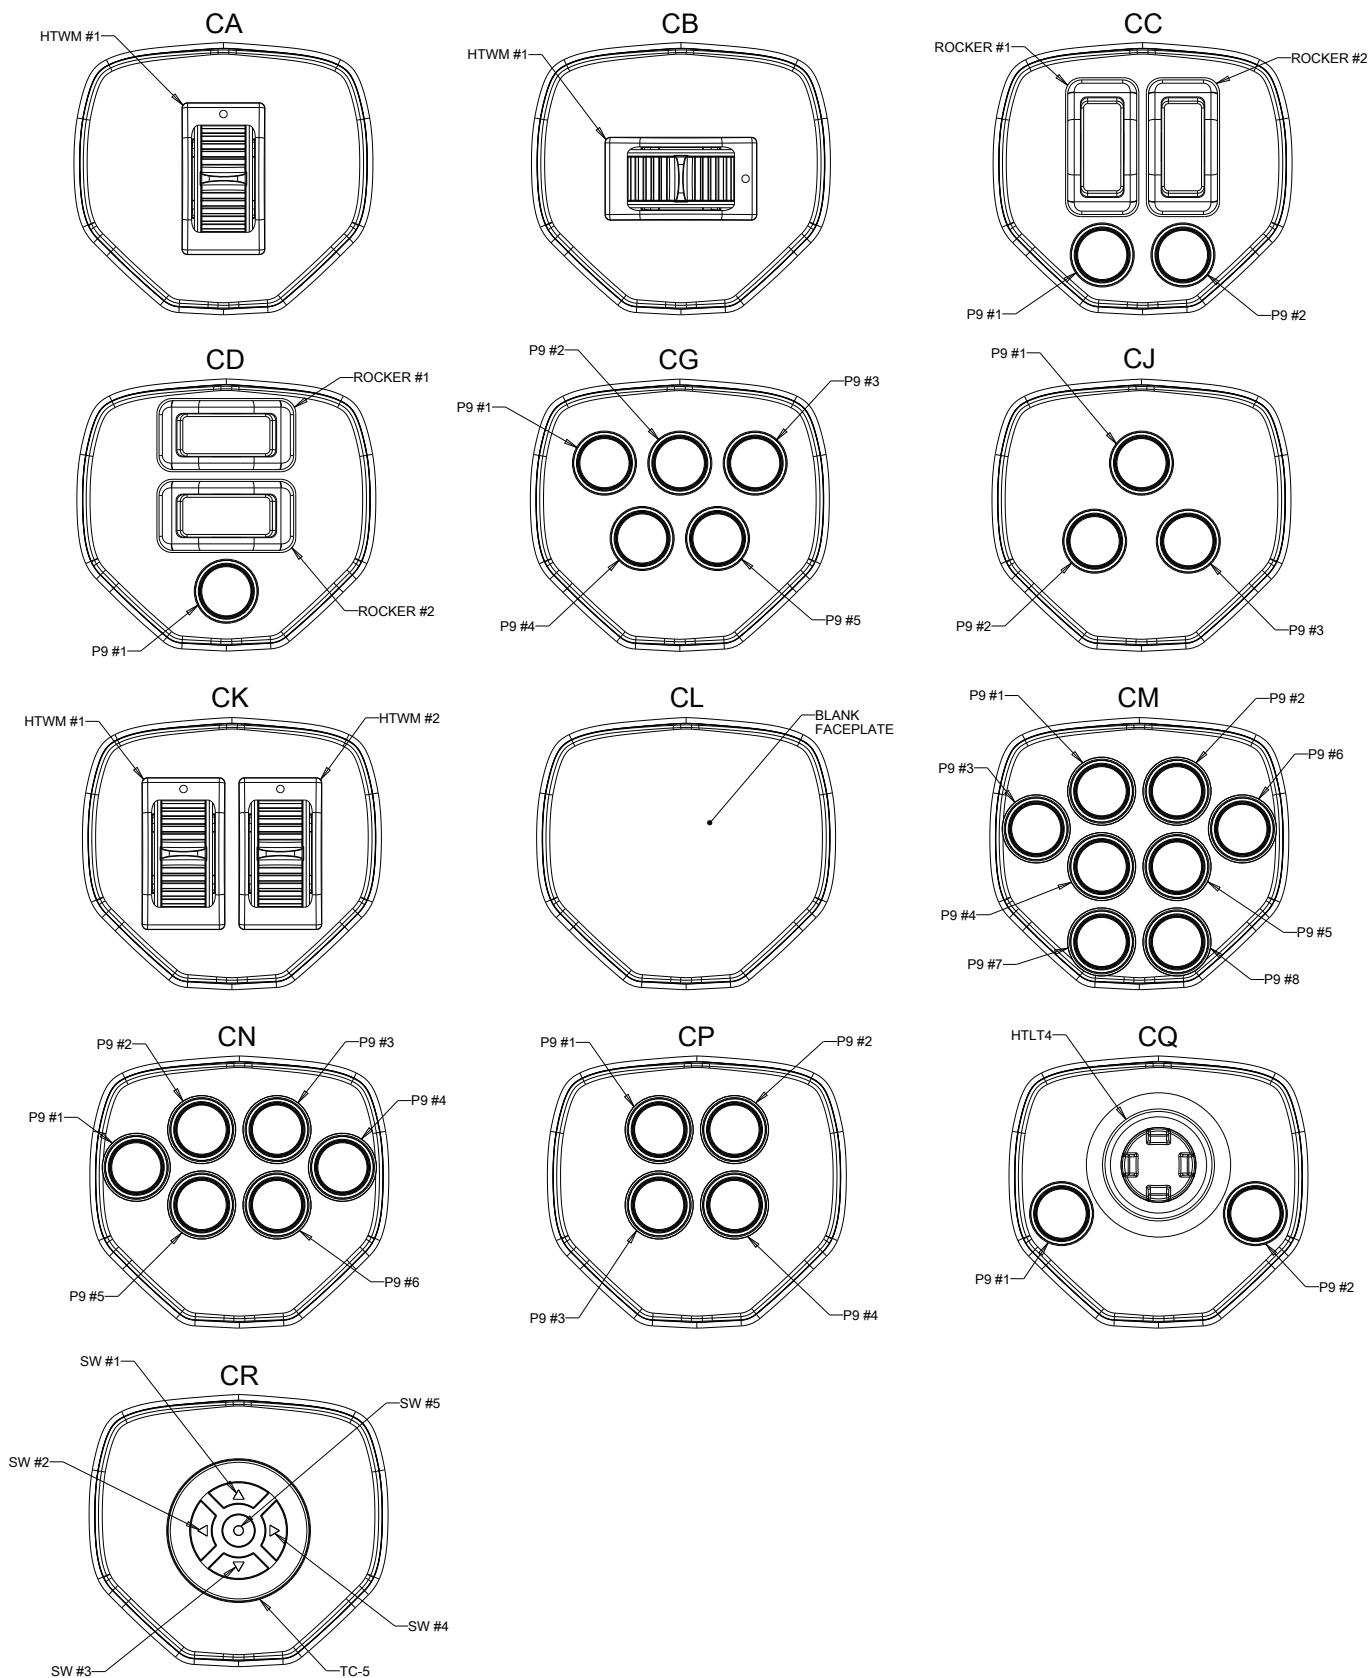

HALL EFFECT JOYSTICK WITH G3-C UNIVERSAL GRIP

HJLG3-C FACEPLATE SCHEMATICS

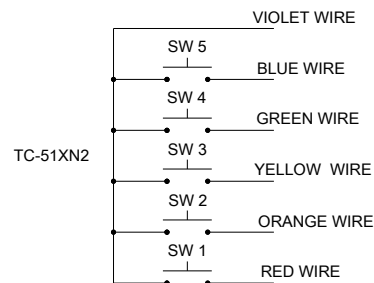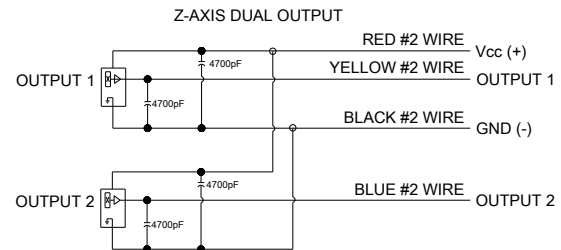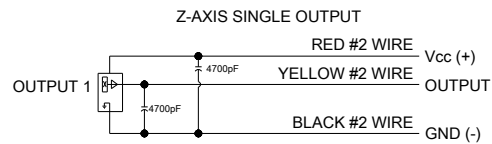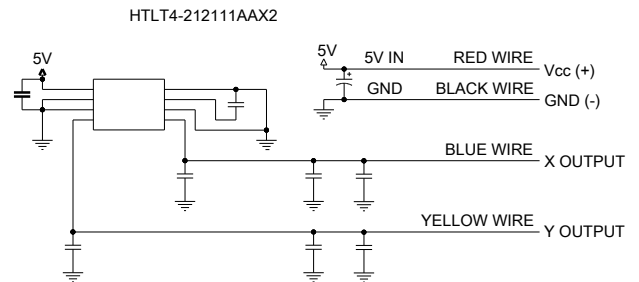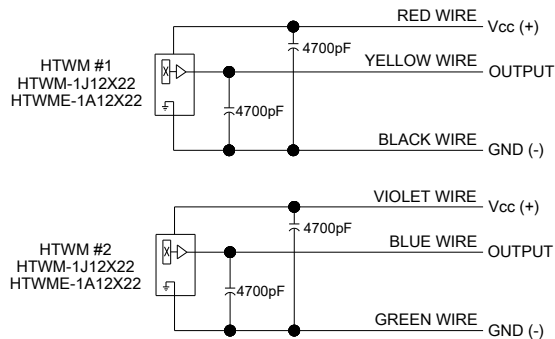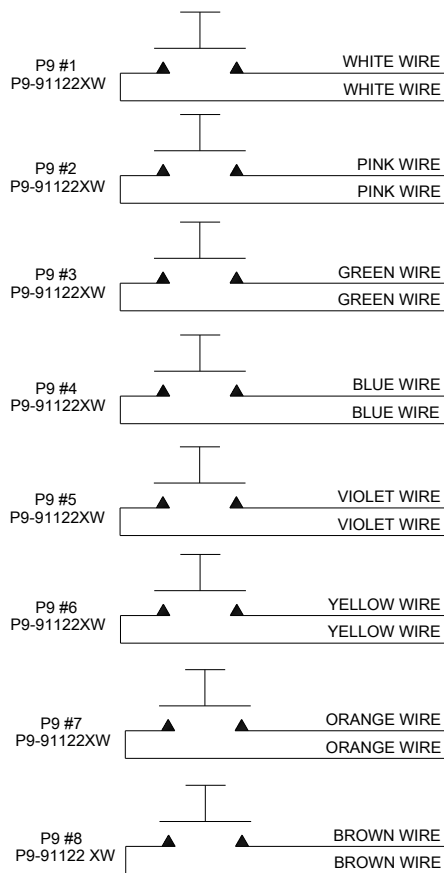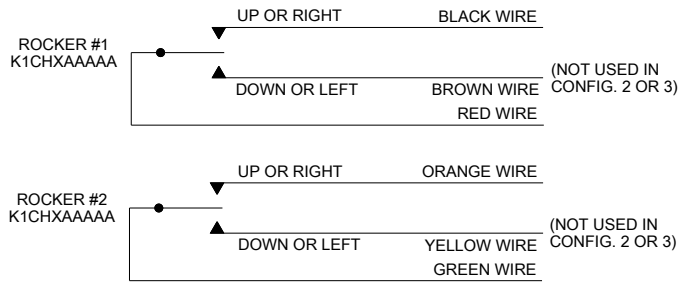

JOYSTICK WITH GRIP OPTIONS

HALL EFFECT JOYSTICK WITH G3-C UNIVERSAL GRIP


HJLG3-C PART NUMBER CODE

| HJLG3-C | X | X | XX | X | X | X | XX Continued Below |
|---|---|---------------------------------------|----------------------|---------------|---------------------|---------------------------|--------------------|
| Z-Axis/Grip Touch Switch | Gating | Joystick Output 1** | Joystick Output 2*** | Operate Force | Trigger in Handle | Grip Head Pushbutton | Faceplate |
| 1. No Z-Axis with No Grip Touch Switch | 1. Gated Single Y-Axis; Return to Center | AA. 2.5 +/- 2.0VDC ③ | NONE | 2. Medium | 1. None | 1. None | CA |
| 2. Grip Touch Switch Only (Active High)* ① ② | 2. Gated Dual Axis; Return to Center | BB. 2.5 +/- 2.0VDC ④ | 2.5 +/- 2.0VDC | 3. High | 2. P9 - Black | 2. Left (Black) | CB |
| 3. Z-Axis (Single Output) with No Grip Touch Switch | 3. Omni-directional; Center Detent Feel | CC. 2.5 +/- 2.0VDC ④ | 2.5 +/- 2.0VDC | | 3. P9 - Red | 3. Left (Red) | CC |
| 4. Z-Axis (Dual Output) with No Grip Touch Switch | 4. Omni-directional; On-Axis and Off-Axis Guided Feel | DD. 2.5 +/- 1.5VDC ③ | NONE | | 4. Single | 4. Right (Black) | CD |
| 5. Grip Touch Switch Only (Active Low)* ① ② | 5. Gated Single Y-Axis; Center Detent Feel | EE. 2.5 +/- 1.5VDC ④ | 2.5 +/- 1.5VDC | | 5. Dual Momentary* | 5. Right (Red) | CG |
| | 6. Friction - Single Axis | FF. 2.5 +/- 1.5VDC ④ | 2.5 +/- 1.5VDC | | 6. Dual Maintained* | 6. Left and Right (Black) | CJ |
| | 7. Friction Y-Axis; Return-to-Center X-Axis | GG. 0.5 - 4.5VDC ④ | 0.5 - 4.5VDC | | 7. 2 P9s - Black | 7. Left and Right (Red) | CK |
| | 8. Omni-directional; Square Smooth Feel | HH. 1.0 - 4.0VDC ④ | 1.0 - 4.0VDC | | 8. 2 P9s - Red | | CL |
| | 9. Omni-directional; Square On-Axis Guided Feel | JJ. CANbus J1939 ③ | NONE | | 9. HTWS - Black⑤ | | CM |
| | | KK. CANopen ③ | NONE | | A. HPL | | CN |
| | | LL. CANbus J1939 w/ Deutsch Connector | NONE | | | | CP |
| | | MM. CANopen w/ Deutsch Connector | NONE | | | | CQ |
| | | | | | | | CR |

HJLG3-C PART NUMBER CODE CONTINUED

| Cont. | X | X | X | X | X |
|-----------------------------|-----------------------------|-------------------------|-------------------------|---------------------------|---|
| K1 Rocker #1 Style - Black⑥ | K1 Rocker #2 Style - Black⑥ | HTWM #1 Roller - Black⑦ | HTWM #2 Roller - Black⑦ | P9 Faceplate Button Color | |
| 1. None | 1. None | 1. None | 1. None | 1. Red | |
| 2. On-Off | 2. On-Off | 2. Return to Center¹ | 2. Return to Center | 2. Black | |
| 3. (On)-Off | 3. (On)-Off | | | 3. Orange | |
| 4. On-Off-On | 4. On-Off-On | 1= HTWM-1J12X22 | | 4. Yellow | |
| 5. (On)-Off-(On) | 5. (On)-Off-(On) | | | 5. Green | |
| | | | | 6. Blue | |
| | | | | 7. Violet | |
| | | | | 8. Gray | |
| | | | | 9. White | |
| | | | | N. None | |

HJLG3 GATING ICONS

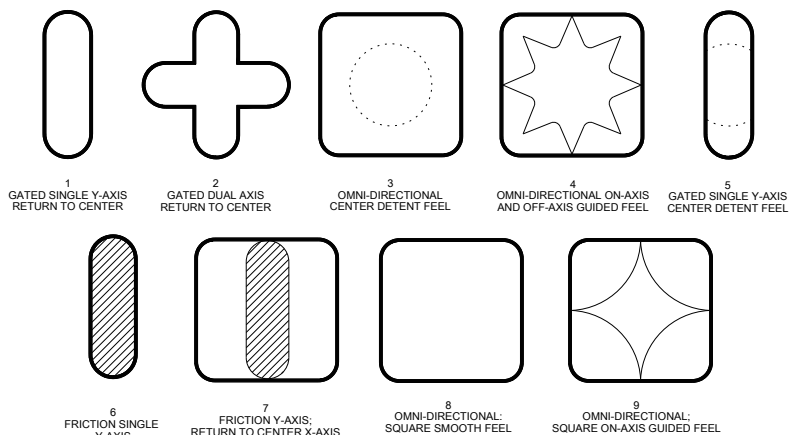

*Grip Touch Switch is not available with trigger option 5 or 6.

**Outputs are from the center to the full travel position in each direction. Options "AA", "BB", "CC", "DD", "EE", "FF" provide increased voltage in +x, +y; and decreasing voltage in -x, -y direction from 1 output per axis.

Options "GG" and "HH" provide increasing voltages in all directions (+x, +y, -x, -y) from 2 outputs per axis.

***Options "BB" and "EE" provide redundant output 2 which duplicates output 1. Options "CC" and "FF" provide redundant output 2 which is inverse of output 1.

① Warning On Personal Injury And Any Use As Safety Related: Do not use these products as safety or emergency stop devices or in any application where failure of the product could result in personal injury. Failure to comply with these instructions could result in death or serious injury. OTTO Engineering Inc. makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does OTTO Engineering Inc. assume any liability whatsoever arising out of the application or use of any product. The product sold hereunder by OTTO has been subject to limited testing and should not be used in conjunction with detection of the presence of an operator on or with any equipment that is in any way safety related. OTTO does not accept any liability for incidental, consequential damages, personal injury or loss of life for any claims against the use of this product.

② User Caution: To guarantee the intended operating characteristics of the capacitive switches, the zone around the switch must be free from materials which can affect switch performance. Those materials include but are not limited to water, cleaning solutions, and other conductive materials. Failure to maintain this contaminant free zone may result in unintended actuation of the capacitive switch.

③ 22 AWG Cable

④ 24 AWG Cable

⑤ HTWS Trigger Switches: positive travel is to the right. Contact factory for additional options.

⑥ K1 Rocker Switches: on position or momentary position is up or to the right and () denotes momentary action. Contact factory for rocker legends and additional color options.

⑦ HTWM Roller Switches: positive travel is up or to the right. Contact factory for additional options.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[OTTO:](#)

[HJLG3-C12CC281CN11114](#) [HJLG3-C32KK341CA1121N](#) [HJLG3-C32MM241CA1121N](#) [HJLG3-C12AA281CN11114](#)
[HJLG3-C32AA211CN11114](#) [HJLG3-C28KK221CG11112](#) [HJLG3-C19AA311CJ11112](#) [HJLG3-C18LL276CM11112](#)
[HJLG3-C19GG341CK1122N](#) [HJLG3-C11LL276CL1111N](#) [HJLG3-C18LL271CQ11112](#) [HJLG3-C23LL241CP11116](#)
[HJLG3-C18LL276CQ11112](#) [HJLG3-C18LL341CK1122N](#) [HJLG3-C13LL341CK1122N](#) [HJLG3-C18LL271CM11112](#)