


SINGLE BREAK, SNAP-ACTION, COMMERCIAL & MILITARY GRADES, ULTRA SMALL SUBMINIATURE WITH INTEGRAL LEVERS

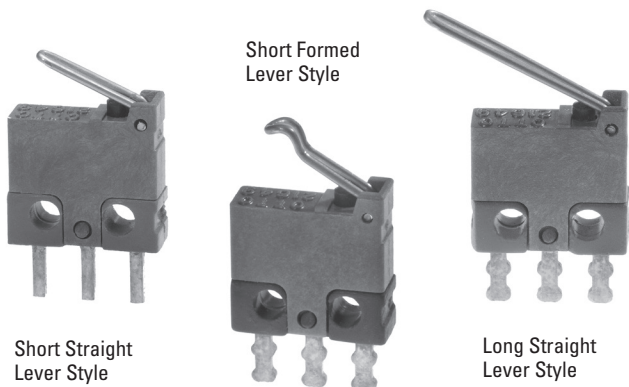

B1-5 Integral Lever Basic Switches

B1-5 series basic switches feature integral actuating levers. The lever is built-in so that the switch and actuator are one assembly.

Making the lever actuator an integral part of the basic switch case makes sense and saves money, too. Better precision, no parts to assemble and more variety add up to a cost saving proposition.

Lever Style	STANDARD OPERATIONAL CHARACTERISTICS						
	Catalog Number	Operating Force (max ounces)	Release Force (min ounces)	Pretravel (max inches)	Overtravel (min inches)	Movement Differential (max inches)	Operating Point (inches)
Short Straight Lever	B1-500111	1.8	0.11	0.054	0.015	0.016	0.250 +/- 0.025
Long Straight Lever	B1-500311	1.0	0.09	0.185	0.023	0.032	0.293 +/- 0.070
Short Formed Lever	B1-500411	2.0	0.15	0.030	0.015	0.020	0.293 +/- 0.025

(Other lever lengths and styles available.)

B1-5 PART NUMBER CODE

B1-5	XXX	X	X
Actuator Identifier	Lever Style	Terminal Style*	Contact Material
Integral Lever Actuator Style	001. Short Straight 003. Long Straight 004. Short Formed (Other lever lengths and styles available.)	1. Double Turret 2. PC Pin 0.140" lg.	1. Silver/Gold - High Current 3. Silver/Gold - Low Current


* Wire leads available, contact factory.

ORDERING INFORMATION:

B1-5 Series, Basic Switch with Integral Lever Actuator

Select the OTTO B1-5 basic switch to match your specific circuit and mechanical requirements. To order, specify your requirement using the OTTO Part Number Code shown at left.

Example: B1-500111 specifies short straight integral lever, double turret terminals and silver/gold high current contacts.

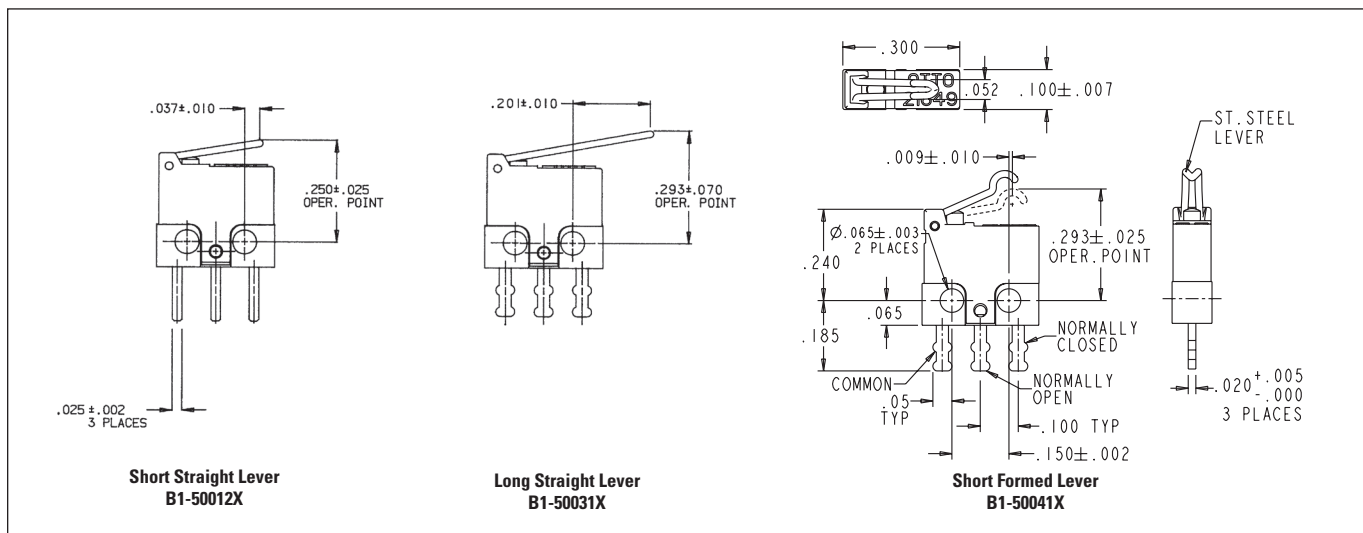

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

OTTO:

B1-500004