# PROPORTIONAL OUTPUT THUMBWHEEL

#### FRICTION HOLD ACTUATION STYLE THUMBWHEEL



The HTWF Friction Hold Thumbwheel offers a maintained position, single axis thumbwheel actuator that provides a linear change in voltage output in either direction from center. Options include increasing or decreasing voltage output from the center position to the full travel position, and single or dual (redundant) outputs per axis. The HTWF Thumbwheel has a rocker style snap-in mounting feature to accommodate a 1.47" x 0.710" panel opening. The HTWF provides 250,000 cycle life, full forward/full backward, electronics are sealed to IP68S, and offers excellent EMI/RFI immunity and a flow through design. Ideal for heavy equipment, industrial machines or remote control applications.

### Features:

- 250,000 cycle life, full forward/full backward with center detent
- Maintained control positioning, no return to center
- Hall effect contactless sensing technology
- Number of output options
- Choice of bezel & button colors
- Snaps into 1.47" x 0.710" panel opening
- Electronics sealed to IP68S
- Excellent EMI/RFI immunity
- RoHS compliant

ŀ	ITWF – X	Х	Х	Х	Х	Х	Х	Х
_							$\backslash$	
Travel	Output 1	Output 2	<b>Operating Force</b>	Button Style	Termination	<b>Bezel Color</b>	<b>Button Color</b>	Detent (if required)
<b>1</b> . +/- 30°	<b>A.</b> 2.5 +/- 2.0VDC	NONE	<b>1.</b> 4.0 oz.	1. Knurled Wheel	A. 18 AWG Wires,	1. Red	<b>1</b> . Red	A. Detent 2 oz increase
	<b>B.</b> 2.5 +/- 2.0VDC	2.5 +/- 2.0VDC		2. Paddle Wheel	18.3" Long,	2. Black	2. Black	out of center in
	C. 2.5 +/- 2.0VDC	2.5 -/+ 2.0VDC			Stripped Ends	3. Orange	3. Orange	both directions*
	D. 2.5 +/- 1.5VDC	NONE			<b>B.</b> 0.025" SQ. Pins	4. Yellow	4. Yellow	* Output options A–F do not
	E. 2.5 +/- 1.5VDC	2.5 +/- 1.5VDC				5. Green	5. Green	have a tolerance on the
	F. 2.5 +/- 1.5VDC	2.5 -/+ 1.5VDC				6. Blue	6. Blue	center outputs unless
	<b>G</b> . 1.0 - 4.0VDC	1.0 - 4.0VDC				7. Violet	7. Violet	a center detent is selected.
	<b>H.</b> 0.5 - 4.5VDC	0.5 - 4.5VDC		8. Gray 8.	<b>8</b> . Gray	Output options G and H are only available with		
						9. White	9. White	center detent.

HTWE PART NUMBER CODE

### Standard Characteristics/Ratings:

#### MECHANICAL:

Mechanical Life: 250,000 full forward to full back with center detent

Initial Operating Force at Top of Roller: 2 oz min to 6 oz max @ 25°C

Max Allowable Radial Load: 30.0 lbs.

ELECTRICAL RATINGS: Rated at Vcc = 5V @  $25^{\circ}$ C Load = 1mA (4.7K $\Omega$ )

Electrical	Units	Min	Тур	Max			
Supply Voltage	VDC	4.5	5	5.5			
Output Voltage Tolerance at Center <i>(see graph for output values)</i>	VDC @ 5V Vcc	-0.15	N/A	+0.15			
Output Voltage Tolerance Full Travel <i>(see graph for output values)</i>	VDC @ 5V Vcc	-0.25	N/A	+0.25			
Supply Current Per Sensor	mA	N/A	N/A	10			


### ELECTRONICS:

Seal Integrity: Electronics watertight per IP68S, 1 meter

ENVIRONMENTAL:						
Operating Temp Range:	-40°C to +85°C					
Humidity:	96% RH, 70°C, 96 hours					
Vibration:	Per MIL-810F minimum integrity					
EMI:	Withstand per SAE J1113					
RFI:	Withstand per SAE J1113					
MATERIALS:						
Button:	Thermoplastic					
Bezel:	Thermoplastic					
Snap Arms:	Stainless steel					
Wires:	18 AWG					

# PROPORTIONAL OUTPUT THUMBWHEEL




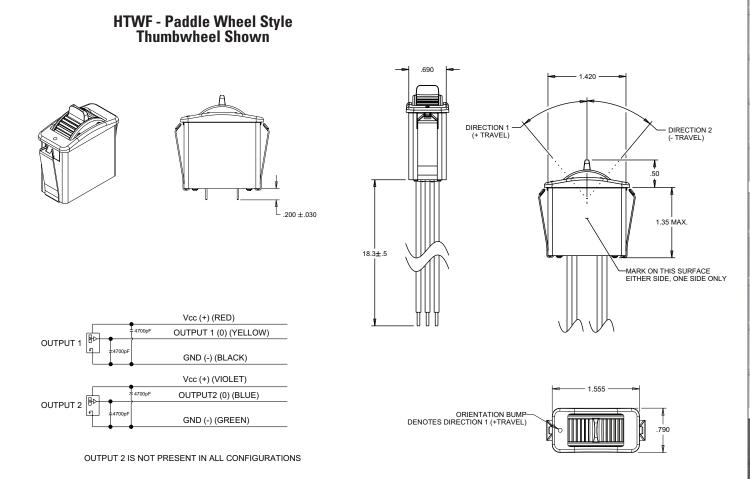


### MOUNTING:


RECOMMENDED PANEL THICKNESS: 0.100 OPTIMUM THICKNESS (0.050 MIN. - 0.120 MAX.)

RECOMMENDED PANEL OPENING: 0.710 X 1.470 OPTIMUM (0.710/0.720 -1.460/1.480}





PINNED TERMINATION NOT ALL PINS ARE PRESENT IN ALL OUTPUT CONFIGURATIONS



NOT ALL WIRES ARE PRESENT IN ALL OUTPUT CONFIGURATIONS


HALL EFFECT CONTROLS


THUMBWHFFI



## PROPORTIONAL OUTPUT THUMBWHEEL

#### FRICTION HOLD ACTUATION STYLE THUMBWHEEL

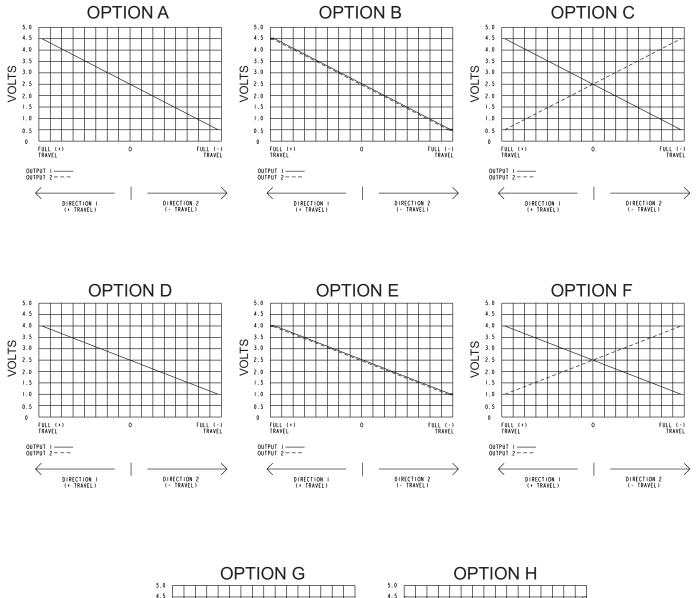

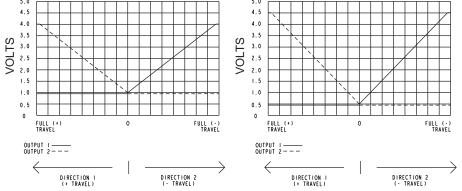

### **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

### OTTO:

HTWF-1A11B22 HTWF-1F12A24A HTWF-1H12A24A HTWF-1C11A22A HTWF-1B12B21A HTWF-1H12A22A HTWF-1A12B22 HTWF-1D12A21A HTWF-1A12A22A HTWF-1C12A22A HTWF-1A12A22 HTWF-1H12B22A HTWF-1A11A22 HTWF-1B11A22 HTWF-1D12A22 HTWF-1A11A22A HTWF-1F12A22A HTWF-1H11A22A HTWF-1A12A24A HTWF-1D12A24A HTWF-1B12A22 HTWF-1C11B22A HTWF-1D11A22 HTWF-1C12A22 HTWF-1B12B22A HTWF-1A12A21 HTWF-1A12A28A HTWF-1A12B21 HTWF-1B12A22A HTWF-1H12A28A HTWF-1H12A26A HTWF-1A12A23