


MINIATURE HALL EFFECT JOYSTICK

JHT
MINI
JOYSTICK

COMPACT DESIGN

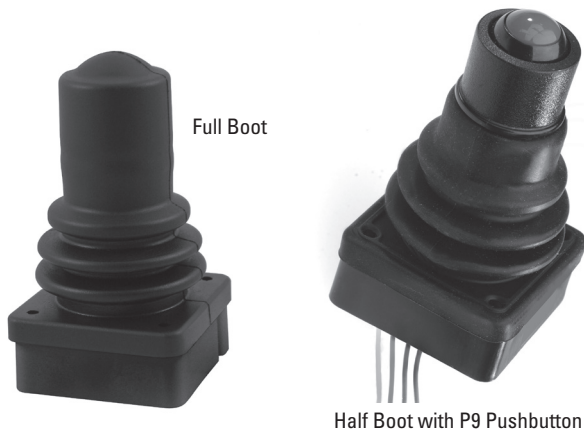

The JHT miniature series Hall Effect joystick's compact design and robust construction is the ideal solution where space is limited and precision control is required. Ideal applications include: robotics, construction equipment, hydraulic controls, medical and surgery equipment, security and surveillance video cameras. The JHT has been tested to five million cycles with no degradation of electrical performance or boot wear. Electronics are sealed to IP68S and EMI/RFI immunity are per SAE J1113 specifications.

Features:

- Compact design excellent for armrest & panel mounting
- Proven contactless analog output Hall effect technology
- 5 million operational cycles in all directions
- Electronics sealed per IP68S
- Single or omni-directional
- Optional pushbutton switch(es) available
- RoHS compliant

Standard Characteristics/Ratings:

GENERAL:

Sensor Type:	Hall effect analog, factory programmed ground and supply line break detection; over voltage and reverse voltage protection
Design:	Contactless sensing

ELECTRICAL RATINGS: Rated at Vcc = 5V @ 20°C Load = 1ma (4.7KΩ)

Electrical

	Units	Min	Typ	Max
Supply Voltage	VDC	4.5	5	5.5
Output Voltage Tolerance at Center	VDC @ 5V Vcc	-.25	N/A	+.25
Output Voltage Tolerance Full Travel	VDC @ 5V Vcc	-.25	N/A	+.25
Supply Current* (B = 0, Vcc = 5V, Io = 0)	mA	N/A	10	12
Output Impedance	kΩ	N/A	1	N/A

*Single output per axis. Dual output per axis available. Supply current 20mA typical.

MECHANICAL:

Joystick Mechanical Life:	5,000,000 cycles in all directions
P9 Mechanical Life:	1,000,000 cycles
Travel Angle:	18° min to 22° max, 20° typical
Overtravel Angle:	0.5° min to 1.5° max, 1° typical
Joystick Operating Force:	With bellows, at grip 0.5 lb. min to 1.5 lbs. max over temperature range
P9 Operating Force:	@20°C 8 oz min to 16 oz max, 12 oz typical

ENVIRONMENTAL:

Operating Temp Range:	-40°C to +85°C
Seal:	Electronics seal to IP68S
RFI/EMI:	Withstand per SAE J1113

MATERIALS:

Housing:	Thermoplastic, black
Bellows:	Silicone, black. Additional materials available, contact factory.

JHT PART NUMBER CODE

JHT	XX	X	X	XX	X	X	
Switch/Boot Style		Gating*	Operating Force	Output 1	Output 2	Termination	P9 Button Color**
11. With P9 Pushbutton & Full Boot 12. With P9 Pushbutton & Half Boot 21. Without Pushbutton & with Full Boot		1. Gated: Single axis – Return to Center 2. Gated: Two axis – Return to Center 3. Omni-directional; Round Smooth Feel 4. Omni-directional; Round On-Axis and Off-Axis Guided Feel 5. Omni-directional; Round On-Axis Guided Feel	1. 1 lb	AA. 2.5 +/- 2.0VDC BB. 2.5 +/- 2.0VDC CC. 2.5 +/- 2.0VDC DD. 2.5 +/- 1.5VDC EE. 2.5 +/- 1.5VDC FF. 2.5 +/- 1.5VDC GG. 0.5 - 4.5VDC HH. 1.0 - 4.0VDC JJ. SPI, 3.3V Supply*** KK. SPI, 5V Supply***	NONE 2.5 +/- 2.0VDC 2.5 +/- 2.0VDC NONE 2.5 +/- 1.5VDC 2.5 +/- 1.5VDC 0.5 - 4.5VDC 1.0 - 4.0VDC NONE NONE	1. 24 AWG Wire Leads	N. None 1. Red 2. Black 3. Orange 4. Yellow 5. Green 6. Blue 7. Purple 8. Gray 9. White

*Gated = Restricted movement in XY axis only. Gating icons appear on page 111.

**Applies only to half boot with pushbutton option.

***P9'S are not part of the SPI output.

NOTES:







- Outputs are from the center to the full travel position in each direction.
- Options "AA," "BB," "CC," "DD," "EE" and "FF" provide increased voltage in +X, +Y; and decreasing voltage in -X, -Y direction from one output per axis.
- Options "GG" and "HH" provide increasing voltages in all directions (+X, +Y, -X, -Y) from 2 outputs per axis.
- Options "BB" and "EE" provide redundant output 2 which duplicates output 1. Options "CC" and "FF" provide redundant output 2 which is inverse of output 1.

Specifications Subject To Change Without Notice

www.ottoexcellence.com 109


COMPACT DESIGN

Full Boot Version Shown

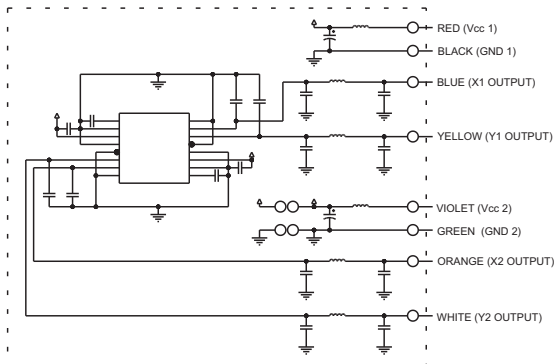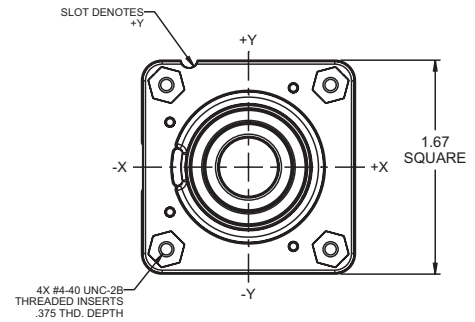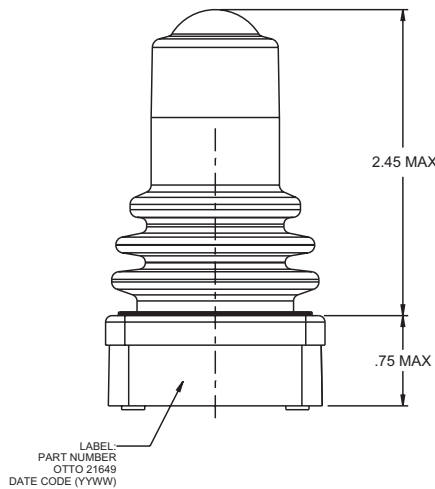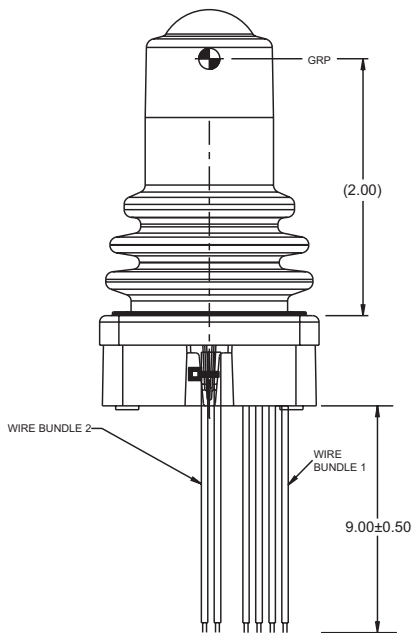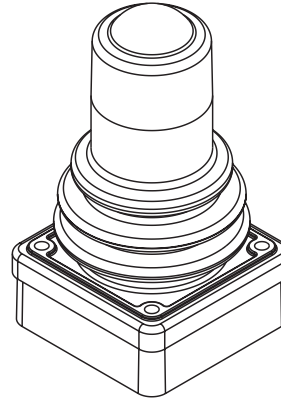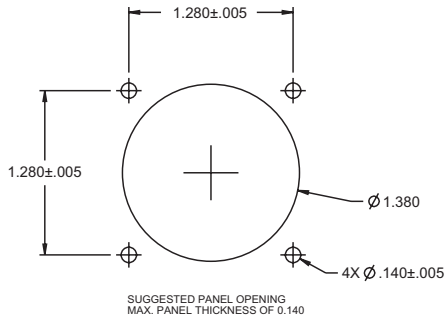


GENERAL SCHEMATIC

(WIRE BUNDLE 1)
ALL OUTPUTS ARE NOT PRESENT IN ALL CONFIGURATIONS



PUSHBUTTON SCHEMATIC

(WIRE BUNDLE 2)
ALL WIRES ARE NOT PRESENT IN ALL CONFIGURATIONS

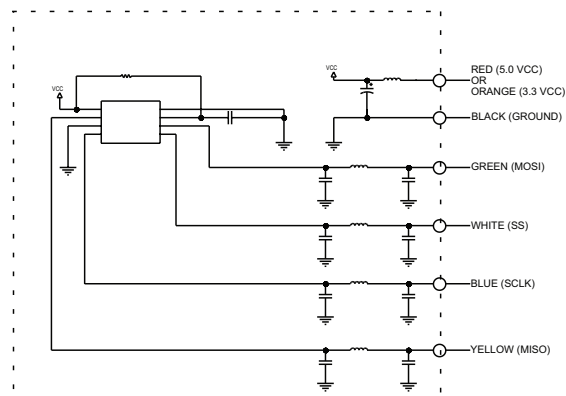

SPI SCHEMATIC


(WIRE BUNDLE 1)
ONLY ONE SUPPLY WIRE IS PRESENT WITH EACH CONFIGURATION

MINIATURE HALL EFFECT JOYSTICK


JHT
MINI
JOYSTICK

COMPACT DESIGN

JHT Switch/Style Boot Configuration

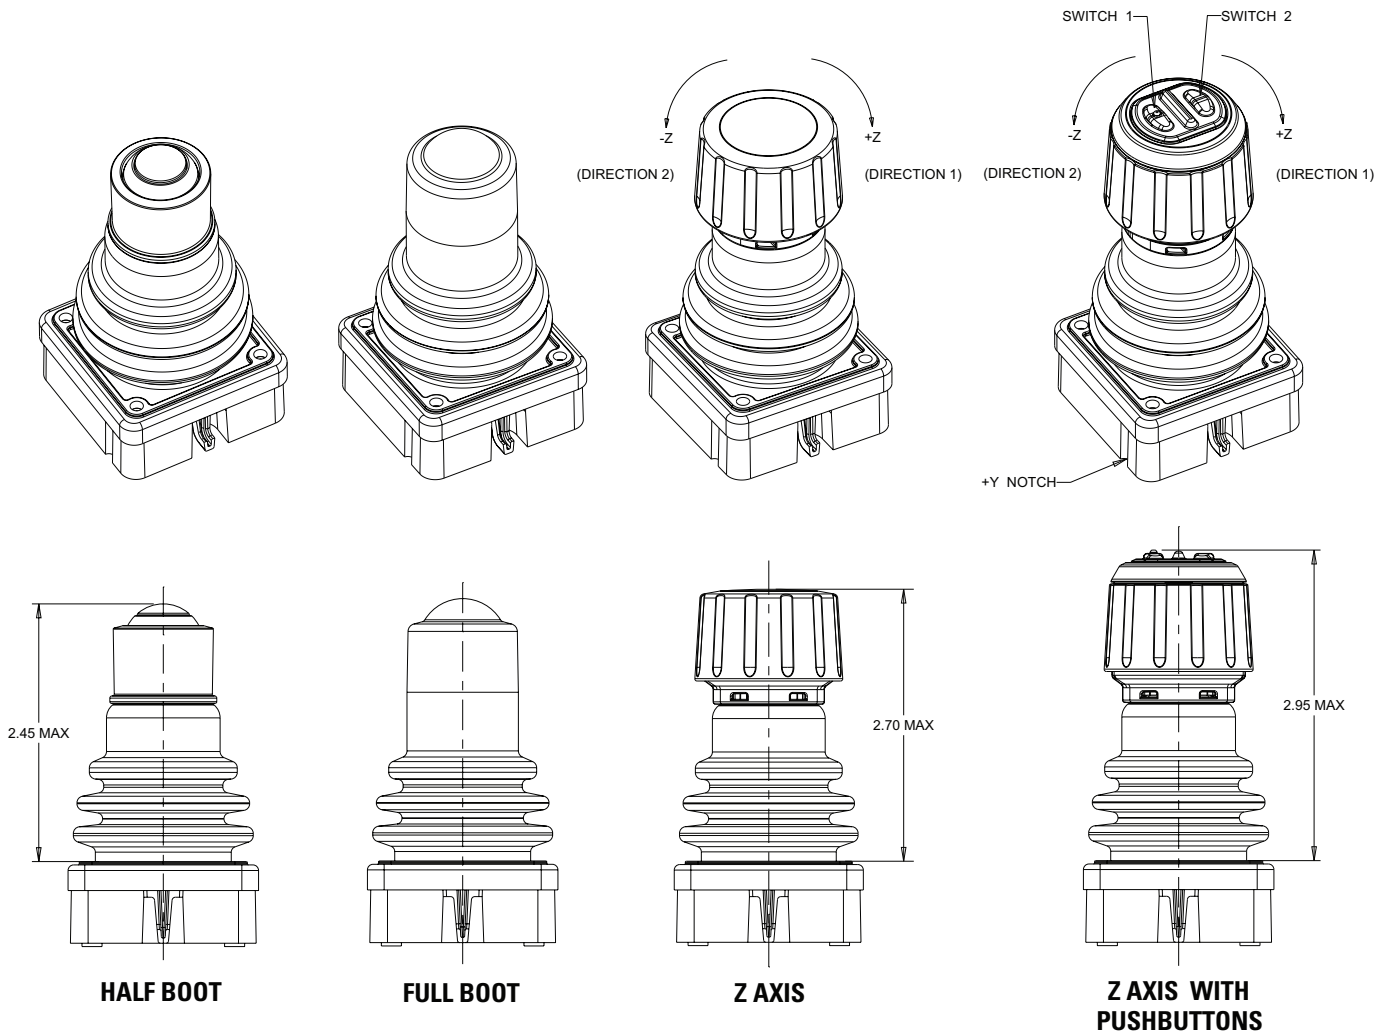

JHT and JHT Z-Axis Icons Demonstrating Feel*

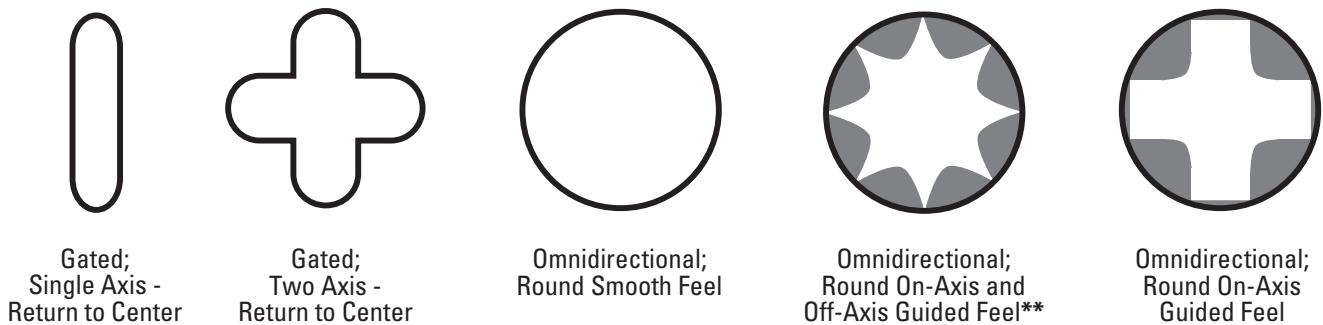


*Feel defined by shading.


**Full output available in all directions. Contact factory for details.

COMPACT DESIGN


OPTION AA

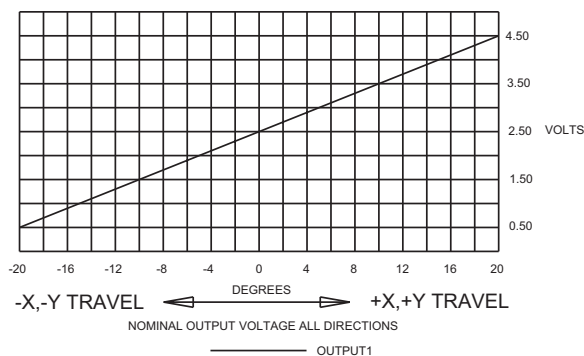


OPTION BB

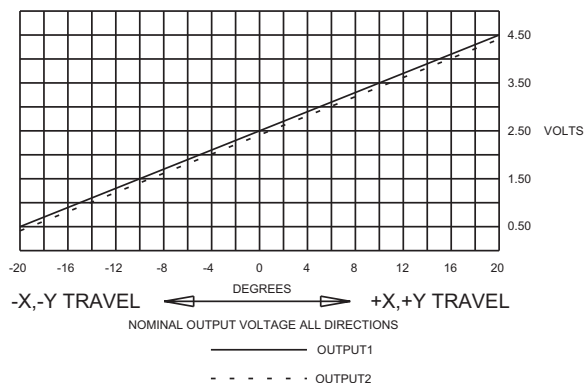


OPTION CC

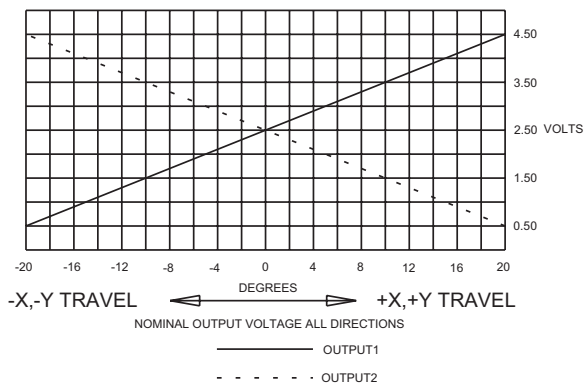


OPTION DD

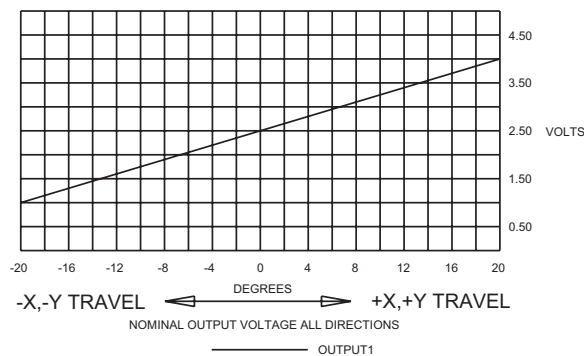


OPTION EE

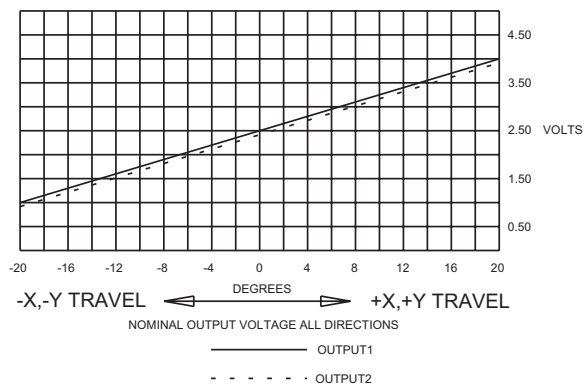


OPTION FF

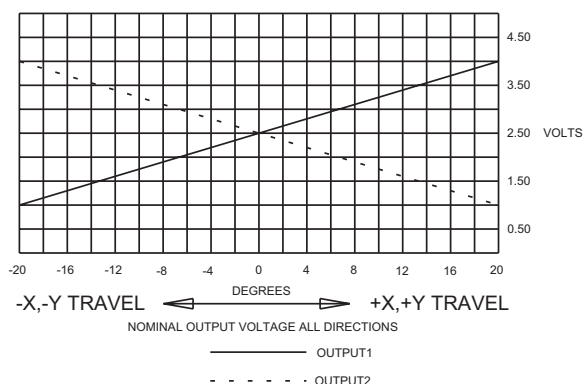

OPTION GG

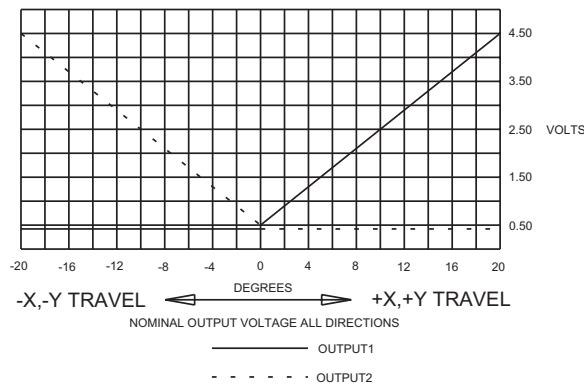

OPTION HH

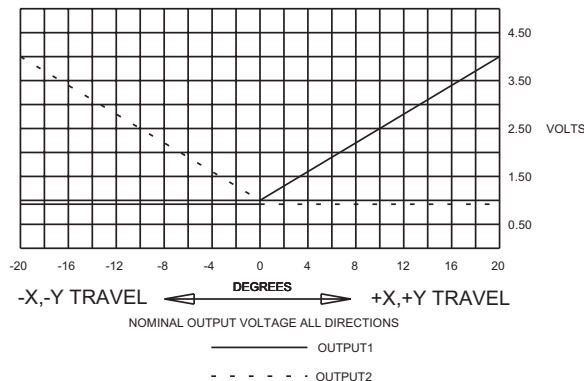

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

OTTO:

[JHT-2141BB1N](#) [JHT-1111GG1N](#) [JHT-1121AA1N](#) [JHT-00025](#) [JHT-00032](#) [JHT-1111BB1N](#) [JHT-1121BB1N](#) [JHT-1151BB1N](#) [JHT-1221AA14](#) [JHT-1231BB18](#) [JHT-1231GG18](#) [JHT-1251AA13](#) [JHT-1151AA1N](#) [JHT-2151AA1N](#) [JHT-1231GG15](#) [JHT-1221AA13](#) [JHT-2121AA1N](#) [JHT-2121GG1N](#)