




ARM Cortex-A9 Freescale i.MX6 scalable single/dual/quad core EDM type 1 compact System-on-Module

Communication by gigabit LAN, WiFi 802.11 b/g/n and Bluetooth v.4.0

Targeting multimedia applications with LVDS, TTL, HDMI, S/PDIF, I²S, MIPI camera and display.



Core System

Signalling CPU
EDM Type 1 compliant
Freescale i.MX6Quad @1.0GHz
Freescale i.MX6Dual @1.0 GHz
Freescale i.MX6DualLite @1.0 GHz
Freescale i.MX6Solo @1.0 GHz
System Memory Storage
up to 2GB DDR3
eMMC / iNAND
or optional NAND Flash
Debug Interface
JTAG Interface
FPC Connector
MIPI interface camera
MIPI interface DSI display

Connectivity

Network
Atheros AR8031 Gigabit LAN
Wireless LAN
Broadcom BCM4330
802.11 b/g/n @ 2.4 Ghz
Bluetooth
Bluetooth v. 4.0

Audio

Interface
I²S (2 channel), S/PDIF
Audio Codec
on EDM Carrier Board

Video

GPU 3D
Solo / DualLite
Vivante GC880
35Mtri/s 266Mpxl/s
Open GL ES 2.0
Dual / Quad
Vivante GC2000
200Mtri/s
1000Mpxl/s,
OpenGL ES 2.0
& Haili, CL EP
Vivante GC355
300Mpxl/s,
OpenVG 1.1
GPU 2D
(Vector Graphics)
emulated on
GPU 3D
GPU 2D
(Composition)
Vivante GC320
600Mpxl/s, BLIT
Video Decode
1080p30 + D1
Video Encode
1080p30 H.264
BP/ Dual 720p
BP/ Dual 720p

I/O



Storage
1x SATA 2.0 (Dual / Quad only)
1x SDIO/ MMC
Expansion
1x PCIe 2.0
Display
HMDI v1.4
1 channel LVDS 18/24 bit
24 bit RGB TTL
USB
USB Host 2.0
USB OTG 2.0
CAN Bus
2x Flex CAN
version 2.0B compliant
2x UART
Serial Port
SPI, I²C, GPIO, Local Bus
Other

Power Specifications

Input Power
5 VDC

Operating Systems

Standard Support
Linux
Android
Extended Support
Commercial Linux
Windows Embedded Compact 7
Real Time OS

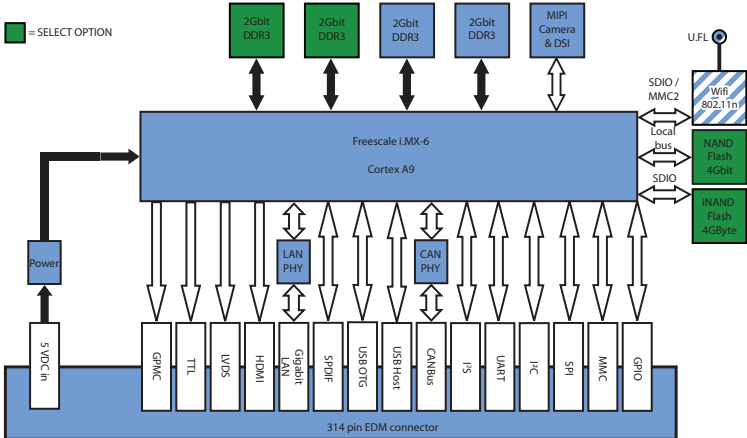


Mechanical and Environmental

Temperature
Commercial: 0° to 60° C
Extended: -20° to 70° C
* Industrial: -40° to 85° C
(* = no wifi, no eMMC)
Humidity
10-90%
Module Connector
314 pins MXM3
Form Factor
EDM Compact Form Factor
82 x 60 mm
Dimensions
(3% x 2% inch)
MTBF
>100,000 hours
Weight
20 grams
Shock
50G / 25ms
Vibration
20G / 0-600 Hz

Dimensions

units in mm

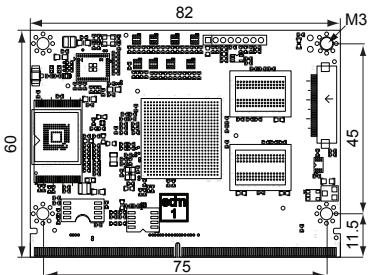

Ordering Information

EDM1-CF-iMX6Q10-BW
EDM1-CF-iMX6Q10
EDM1-CF-iMX6D10-BW
EDM1-CF-iMX6D10
EDM1-CF-iMX6U10-BW
EDM1-CF-iMX6U10
EDM1-CF-iMX6S10-BW
EDM1-CF-iMX6S10
Freescale i.MX6 Quad core EDM Compact Type 1 with WiFi and Bluetooth
Freescale i.MX6 Quad core EDM Compact Type 1
Freescale i.MX6 Dual core EDM Compact Type 1 with WiFi and Bluetooth
Freescale i.MX6 Dual core EDM Compact Type 1
Freescale i.MX6 DualLite core EDM Compact Type 1 with WiFi and Bluetooth
Freescale i.MX6 DualLite core EDM Compact Type 1
Freescale i.MX6 Single core EDM Compact Type 1 with WiFi and Bluetooth
Freescale i.MX6 Single core EDM Compact Type 1

Optional Accessories

EDM-C-Bracket
HSP-EDM-C-10W
HS-EDM-CF-iMX6
EDM compact Carrier Board mount bracket
EDM passive heatsink
EDM-CF-i.MX6 compatible heatspreader

Feel free to contact us for custom tailored Carrier Board request for your projects.



Start Kits

EDM1-CF-iMX6S10-START
EDM1-CF-iMX6U10-START
EDM1-CF-iMX6D10-START

EDM Compact Type 1 Freescale i.MX6 Solo 1Ghz + 512MB RAM + 4GB iNAND + Gigabit LAN + 2 CAN (**EDM1-CF-iMX6S10-R512-Ni4G-L-2C**)
EDM Compact Type 1 Freescale i.MX6 Duallite 1Ghz + 1GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN (**EDM1-CF-iMX6U10-R1GB-Ni4G-L-2C**)
EDM Compact Type 1 Freescale i.MX6 Dual 1Ghz + 1GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + SATA & EDM Compact passive heatsink (**EDM1-CF-iMX6D10-R1GB-Ni4G-L-S-2C + EDM-HS-CP12-20-05-01**)
EDM Compact Type 1 Freescale i.MX6 Quad 1Ghz + 2GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + SATA & EDM Compact passive heatsink (**EDM1-CF-iMX6Q10-R2GB-Ni4G-L-S-2C + EDM-HS-CP12-20-05-01**)

EDM1-CF-iMX6Q10-START

EDM Compact Type 1 Freescale i.MX6 Solo 1Ghz + 512MB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + 802.11bgn + Bluetooth 4.0 & EDM antenna kit (**EDM1-CF-iMX6S10-R512-Ni4G-BW-L-2C + EDM-ANT-P150-A138-045D-2450-BK**)
EDM Compact Type 1 Freescale i.MX6 Duallite 1Ghz + 1GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + 802.11bgn + Bluetooth 4.0 & EDM antenna kit (**EDM1-CF-iMX6U10-R1GB-Ni4G-BW-L-2C + EDM-ANT-P150-A138-045D-2450-BK**)
EDM Compact Type 1 Freescale i.MX6 Dual 1Ghz + 1GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + SATA + 802.11bgn + Bluetooth 4.0 & EDM antenna kit & EDM Compact passive heatsink (**EDM1-CF-iMX6D10-R1GB-Ni4G-BW-L-S-2C + EDM-ANT-P150-A138-045D-2450-BK + EDM-HS-CP12-20-05-01**)
EDM Compact Type 1 Freescale i.MX6 Quad 1Ghz + 2GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + SATA + 802.11bgn + Bluetooth 4.0 & EDM antenna kit & EDM Compact passive heatsink (**EDM1-CF-iMX6Q10-R2GB-Ni4G-BW-L-S-2C + EDM-ANT-P150-A138-045D-2450-BK + EDM-HS-CP12-20-05-01**)

EDM1-CF-iMX6S10-BW-START

EDM1-CF-iMX6U10-BW-START

EDM1-CF-iMX6D10-BW-START

EDM1-CF-iMX6Q10-BW-START

Standard Partnumbers

EDM1-CF-iMX6S10-R512-Ni4G-L-2C
EDM1-CF-iMX6U10-R1GB-Ni4G-L-2C
EDM1-CF-iMX6D10-R1GB-Ni4G-L-S-2C
EDM1-CF-iMX6Q10-R2GB-Ni4G-L-S-2C

EDM Compact Type 1 Freescale i.MX6 Solo 1Ghz + 512MB RAM + 4GB iNAND + Gigabit LAN + 2 CAN
EDM Compact Type 1 Freescale i.MX6 Duallite 1Ghz + 1GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN
EDM Compact Type 1 Freescale i.MX6 Dual 1Ghz + 1GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + SATA
EDM Compact Type 1 Freescale i.MX6 Quad 1Ghz + 2GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + SATA

EDM1-CF-iMX6S10-R512-Ni4G-BW-L-2C
EDM1-CF-iMX6U10-R1GB-Ni4G-BW-L-2C
EDM1-CF-iMX6D10-R1GB-Ni4G-BW-L-S-2C
EDM1-CF-iMX6Q10-R2GB-Ni4G-BW-L-S-2C

EDM Compact Type 1 Freescale i.MX6 Solo 1Ghz + 512MB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + 802.11bgn + Bluetooth 4.0
EDM Compact Type 1 Freescale i.MX6 Duallite 1Ghz + 1GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + 802.11bgn + Bluetooth 4.0
EDM Compact Type 1 Freescale i.MX6 Dual 1Ghz + 1GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + SATA + 802.11bgn + Bluetooth 4.0
EDM Compact Type 1 Freescale i.MX6 Quad 1Ghz + 2GB RAM + 4GB iNAND + Gigabit LAN + 2 CAN + SATA + 802.11bgn + Bluetooth 4.0

Optional Accessories

EDM-ANT-P150-A138-045D-2450-BK
EDM-HS-CP12-20-05-01
EDMCONNECTORKIT

EDM antenna kit containing U.FL to SMA patch cable + 4.5 dB, 2.4/5 GHz, black color antenna.
EDM Compact 12 mm passive heatsink + 20*20 mm thermopad with 0.5 mm thickness for Lidded Freescale CPUs + mylar.
10 EDM AS0B821-S78B-7H connectors + 40 standoff's + 40 screws.

How to create a Custom Partnumber (MOQ's apply)

EDM-CF1-iMX6Q10-R1GB-Ni4G-BW-L-S-2C-TE-xxxx

EDM	Embedded Design Module
EDM Type	Pin definition of EDM Type 1 or Type 2
Formfactor of Module	C = Compact; S = Standard; X = Extended
Chipvendor	F = Freescale
CPU type	for example : i.MX6
CPU cores	S = Single core; U = DualLite; D = Dualcore; Q = Quadcore
CPU speed	10 = 1GHz; 08 = 800MHz
Memory	R512 = 512MB; R1GB = 1GB; R2GB = 2GB
Storage	Ni4G = iNAND 4GB; N512 = 512 NAND Flash (iNAND is only possible in Commercial and Extended temperature. For Industrial Temperature only NAND Flash is possible.
Wireless LAN	None = no wireless communication; W = WiFi; BW = Bluetooth + WiFi (only available in commercial and extended temperature)
Network LAN	None = no Ethernet; L = 1000Gbps Ethernet LAN
SATA	None = no SATA; S = SATA (only on i.MX6 Dual or i.MX6 Quad
CANbus	None = no CANbus; 1C = 1 CANbus; 2C = 2 CANbus
Temperature	None = Commercial Temp (0~60C); TE = Extended Temp (-20~70C); TI = Industrial Temp (-40~85C); TEC = Extended Temperature Certified; TIC = Industrial Temperature Certified
Customer ID code	xxxx = special order code for custom softwrae loading or BOM option

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TechNexion:](#)

[EDM1-IMX6Q-MSD-BW](#)