

FEATURES

- *Guaranteed* Temperature Stability
- Maximum 0.6Ω Dynamic Impedance
- Adjustable for Minimum Temperature Coefficient
- Wide Operating Current Range

APPLICATIONS

- Reference for 5V Systems
- 8-Bit A/D and D/A Reference
- Digital Voltmeters
- Current Loop Measurement and Control Systems
- Power Supply Monitor

DESCRIPTION

The LM136-2.5 is a general purpose shunt regulator diode designed to operate over a wide current range while maintaining good stability with time and temperature. The third terminal allows either the temperature coefficient to be minimized or the reference voltage to be adjusted without changing the temperature coefficient. Because it operates as a shunt regulator it can be used equally well as a positive or negative reference.


The LM136-2.5 is available with initial tolerances as low as 1% in either a TO-46 metal can for hermetic requirements or a low cost TO-92 plastic package.

Linear's advanced design, test and process techniques have optimized the LM136-2.5 to achieve superior performance and reliability over previous designs. For more demanding precision reference applications requiring very low initial tolerance and temperature coefficients, consult the LT1009 data sheet. A typical 2.5V reference with trim is shown below.


LT, LTC and LT are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

2.5V Reference

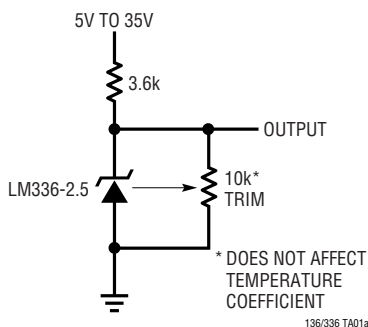

Reverse Voltage Change


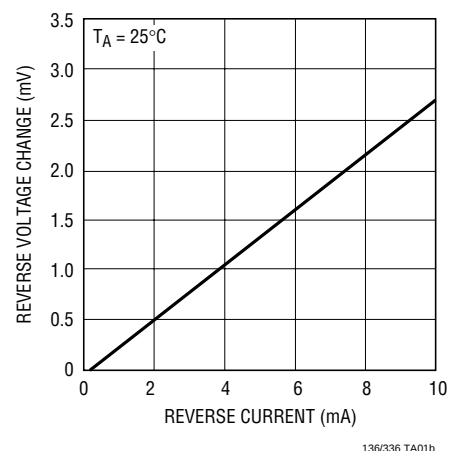


LM136-2.5/LM336-2.5

ABSOLUTE MAXIMUM RATINGS (Note 1)

Operating Temperature Range	LM136-2.5 (OBSOLETE) -55°C to 125°C	Lead Temperature (Soldering, 10 sec) 300°C
	LM336-2.5 0°C to 70°C	Reverse Current 15mA
Storage Temperature Range	 -65°C to 150°C	Forward Current 10mA

PACKAGE/ORDER INFORMATION

 BOTTOM VIEW H PACKAGE 3-LEAD TO-46 METAL CAN $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 440^{\circ}\text{C/W}$ (NOTE 2) OBSOLETE PACKAGE Consider the Z Packages for Alternate Source	ORDER PART NUMBER	 BOTTOM VIEW Z PACKAGE 3-LEAD PLASTIC TO-92 $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 160^{\circ}\text{C/W}$ (NOTE 2)	ORDER PART NUMBER
	LM136H-2.5 LM136AH-2.5 LM336H-2.5 LM336AH-2.5		LM336Z-2.5 LM336BZ-2.5

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}\text{C}$. (Note 2)

SYMBOL	PARAMETER	CONDITIONS		LM136/LM136A			LM336/LM336B			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V_Z	Reverse Breakdown Voltage	$T_A = 25^{\circ}\text{C}$, $I_R = 1\text{mA}$ LM136/LM336 LM136A/LM336B		2.440	2.490	2.540	2.390	2.490	2.590	V
				2.465	2.490	2.515	2.440	2.490	2.540	V
$\frac{\Delta V_Z}{\Delta I_R}$	Reverse Breakdown Change with Current	$400\mu\text{A} \leq I_R \leq 10\text{mA}$ $T_A = 25^{\circ}\text{C}$ $T_{MIN} \leq T_A \leq T_{MAX}$	●		2.6	6		2.6	10	mV
					3.0	10		3.0	12	mV
r_Z	Reverse Dynamic Impedance	$I_R = 1\text{mA}$ $T_A = 25^{\circ}\text{C}$ $T_{MIN} \leq T_A \leq T_{MAX}$	●		0.2	0.6		0.2	1.0	Ω
					0.4	1.0		0.4	1.4	Ω
$\frac{\Delta V_Z}{\Delta \text{Temp}}$	Temperature Stability	V_R Adjusted to 2.490V, $I_R = 1\text{mA}$, $T_{MIN} \leq T_A \leq T_{MAX}$ (See Figure 1)	●		12	18		1.8	6	mV
$\frac{\Delta V_Z}{\Delta \text{Time}}$	Long Term Stability	$T_A = 25^{\circ}\text{C} \pm 0.1^{\circ}\text{C}$, $I_R = 1\text{mA}$			20			20		ppm/kHr

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: The LT1009 is an improved, low cost, pin for pin replacement for the "A" and "B" versions. For further information consult the LT1009 data sheet.


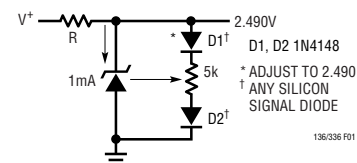



Figure 1. Adjusting the LM336 for Minimum Temperature Coefficient

TYPICAL PERFORMANCE CHARACTERISTICS


Reverse Characteristics

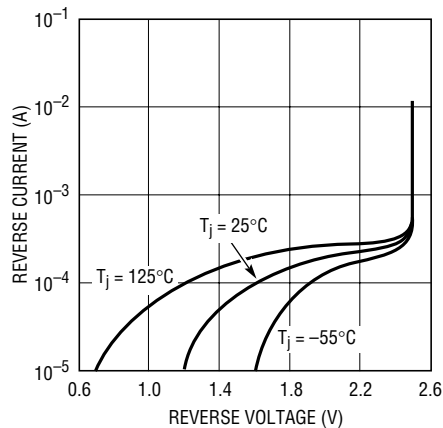


Forward Characteristics

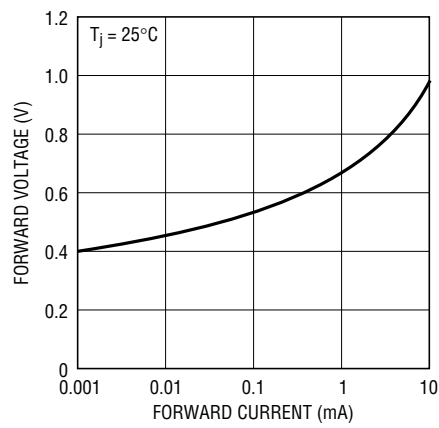


Temperature Drift

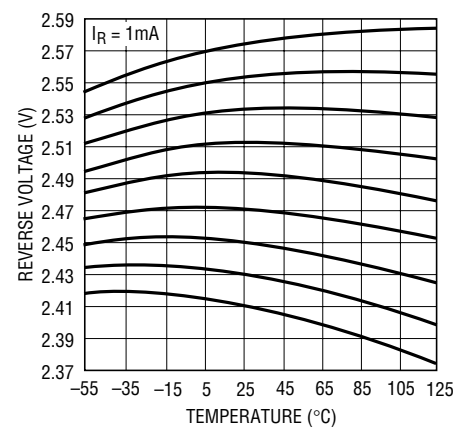


Dynamic Impedance

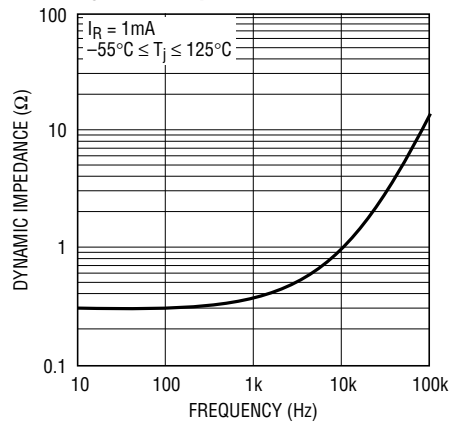


Zener Noise Voltage

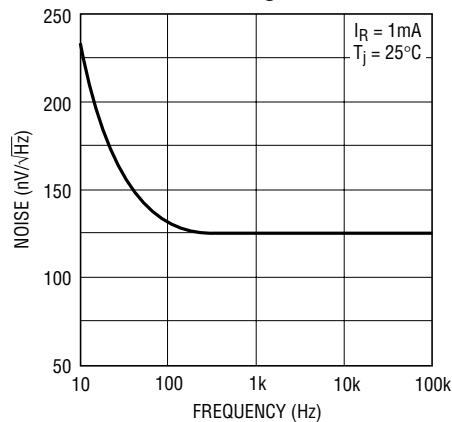

Response Time

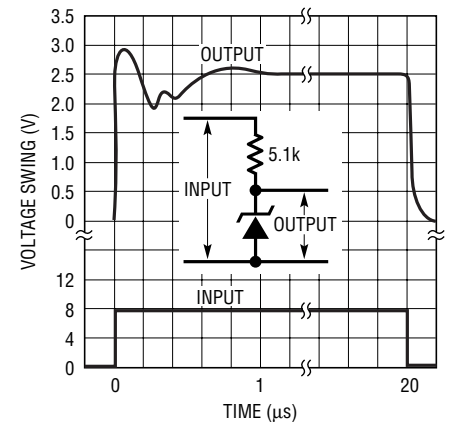


SCHEMATIC DIAGRAM

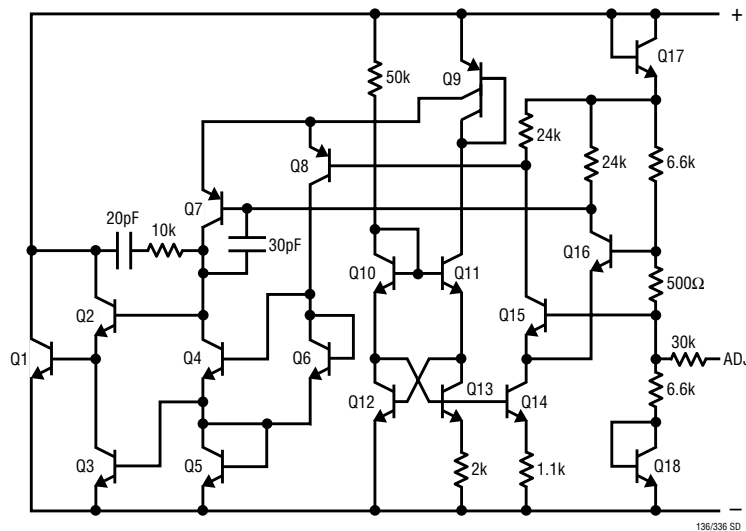

LM136-2.5/LM336-2.5


TYPICAL APPLICATIONS

Wide Supply Range, Reference



136/336 TA02


Low Temperature Coefficient Power Regulator



*ADJUST R2 FOR 3.75V ACROSS R1

136/336 TA03


Switchable $\pm 1.25V$ Bipolar Reference



*LM336-2.5

136/336 TA04

Low Noise 2.5V Buffered Reference

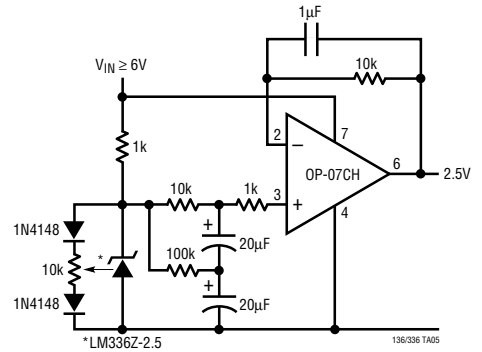


*LM336Z-2.5

136/336 TA05


PACKAGE DESCRIPTION

H Package 2-Lead and 3-Lead TO-46 Metal Can (Reference LTC DWG # 05-08-1340)

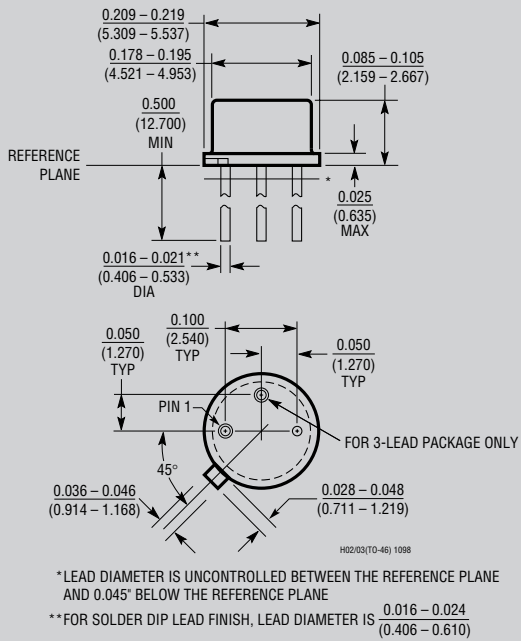

OBSOLETE PACKAGE

Z Package 3-Lead Plastic TO-92 (Similar to TO-226) (Reference LTC DWG # 05-08-1410)

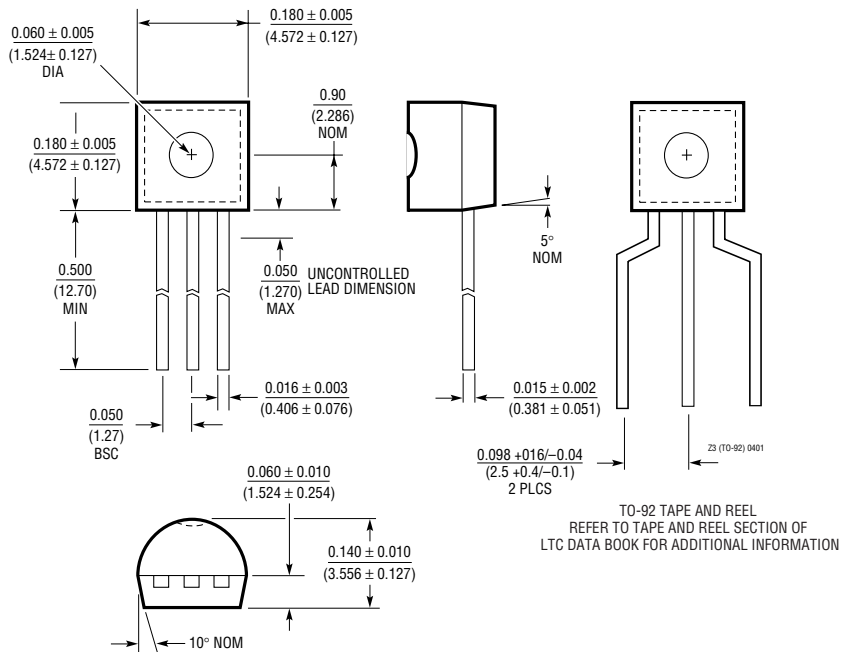

TO-92 TAPE AND REEL
REFER TO TAPE AND REEL SECTION OF
LTC DATA BOOK FOR ADDITIONAL INFORMATION

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1009	Precision 2.5V Shunt Reference	0.2% Max Initial Tolerance

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[LM336Z-2.5#TRPBF](#) [LM336Z-2.5](#) [LM336Z-2.5#PBF](#) [LM336Z-2.5#TR](#)