

Not Recommended for New Designs

This product was manufactured for Maxim by an outside wafer foundry using a process that is no longer available. It is not recommended for new designs. The data sheet remains available for existing users.

A Maxim replacement or an industry second-source may be available. Please see the QuickView data sheet for this part or contact technical support for assistance.

For further information, [contact Maxim's Applications Tech Support](#).



High-Precision, Low-Voltage, Micropower Op Amp

MAX480

General Description

The MAX480 is a precision micropower operational amplifier with flexible power-supply capability. Its guaranteed $140\mu\text{V}$ maximum offset voltage ($25\mu\text{V}$ typ) is the lowest of any micropower op amp. Similarly, input bias current, input offset current, and drift specifications are within tight limits.

Both the input and output voltage ranges include the negative supply rail, allowing maximum signal range capability in single-supply applications. The MAX480 operates with either a single supply ranging from $+1.6\text{V}$ to $+36\text{V}$ or dual supplies from $\pm 0.8\text{V}$ to $\pm 18\text{V}$. The MAX480 consumes less than $20\mu\text{A}$, allowing operation in excess of 10,000 hours from a 250mA-hr lithium coin cell. Even with a minimal quiescent current, the amplifier sinks or sources 5mA from its output.

The MAX480 is available in 8-pin DIP and SO packages in commercial, extended, and military temperature ranges.

Applications

Precision Micropower Amplifiers

Micropower Signal Processing

Battery-Powered Analog Circuits


Features

- ◆ Single- or Dual-Supply Operation: $+1.6\text{V}$ to $+36\text{V}$, $\pm 0.8\text{V}$ to $\pm 18\text{V}$
- ◆ True Single-Supply Operation: Input and Output Voltage Ranges Include Ground
- ◆ $2.0\mu\text{V}/^\circ\text{C}$ Max Offset Voltage Drift
- ◆ $20\mu\text{A}$ Max Supply Current
- ◆ 5mA Min Output Drive
- ◆ $140\mu\text{V}$ Max Input Offset Voltage
- ◆ 3nA Max Input Bias Current
- ◆ 500V/mV Min Open-Loop Gain
- ◆ Standard 741 Pinout with Nulling to V-


Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX480CPA	0°C to $+70^\circ\text{C}$	8 Plastic DIP
MAX480CSA	0°C to $+70^\circ\text{C}$	8 SO
MAX480EPA	-40°C to $+85^\circ\text{C}$	8 Plastic DIP
MAX480ESA	-40°C to $+85^\circ\text{C}$	8 SO
MAX480MJA	-55°C to $+125^\circ\text{C}$	8 CERDIP

Typical Operating Circuit

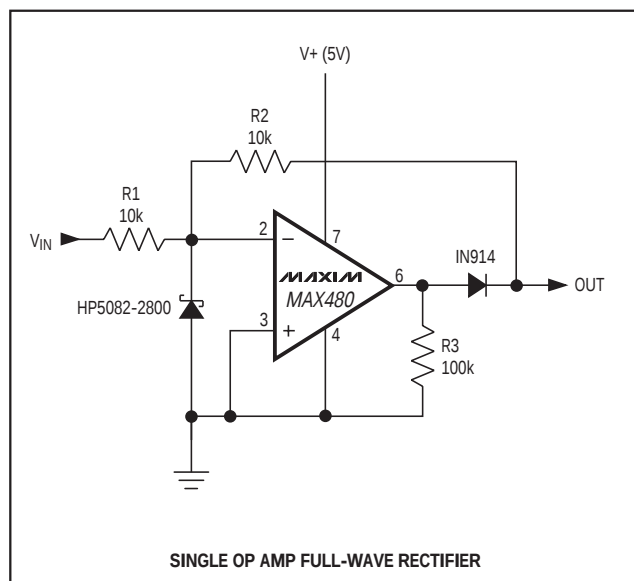

Pin Configuration

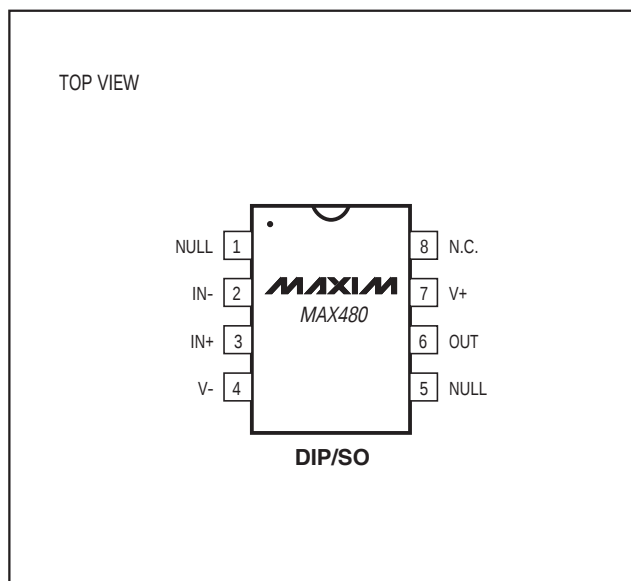

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

High-Precision, Low-Voltage, Micropower Op Amp

ABSOLUTE MAXIMUM RATINGS

Supply Voltage (V_+ to V_-) $\pm 18V$
 Differential Input Voltage($V_- - 20V$) to ($V_+ + 20V$)
 Common-Mode Input Voltage($V_- - 20V$) to ($V_+ + 20V$)
 Output Short-Circuit DurationIndefinite
 Continuous Power Dissipation
 Plastic DIP (derate 9.09mW/°C above +70°C)727mW
 SO (derate 5.88mW/°C above +70°C)471mW
 CERDIP (derate 8.0mW/°C above +70°C)640mW

Operating Temperature Ranges

MAX480C_A0°C to +70°C
 MAX480E_A-40°C to +85°C
 MAX480MJA-55°C to +125°C
 Junction Temperature (T_J)-65°C to +150°C
 Storage Temperature Range-65°C to +150°C
 Lead Temperature (soldering, 10sec)+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

($V_S = \pm 1.5V$ to $\pm 15V$, $T_A = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Input Offset Voltage	V_{OS}				25	140	μV
Input Offset Current	I_{OS}	$V_{CM} = 0$			0.2	4	nA
Input Bias Current	I_B	$V_{CM} = 0$			1	10	nA
Large-Signal Voltage Gain	A_{VO}	$V_S = \pm 15V$, $V_O = \pm 10V$	$R_L = 100k\Omega$	500	1200		V/mV
			$R_L = 10k\Omega$	200	600		
			$R_L = 2k\Omega$	75	250		
		$V_+ = 5V$, $V_- = 0$, $1V < V_O < 4V$	$R_L = 100k\Omega$	100	400		
			$R_L = 10k\Omega$	50	180		
Input Voltage	IVR	$V_+ = 5V$, $V_- = 0$		0/4			V
		$V_S = \pm 15V$ (Note 1)		-15/13.5			
Output Voltage Swing	V_O	$V_S = \pm 15V$	$R_L = 10k\Omega$	± 14	± 14.2		V
			$R_L = 2k\Omega$	± 10	± 12		
	V_{OH}	$V_+ = 5V$, $V_- = 0$, $R_L = 2k\Omega$		4.0	4.2		
	V_{OL}	$V_+ = 5V$, $V_- = 0$, $R_L = 10k\Omega$			100	500	μV
Common-Mode Rejection Ratio	CMRR	$V_+ = 5V$, $V_- = 0$, $0 < V_{CM} < 4V$		85	110		dB
		$V_S = \pm 15V$, $-15V < V_{CM} < 13.5V$		90	130		
Power-Supply Rejection Ratio	PSRR				1.0	12	$\mu V/V$
Slew Rate	SR	$V_S = \pm 15V$			12		V/ms
Supply Current	I_{SY}	$V_S = \pm 1.5V$			9	15	μA
		$V_S = \pm 15V$			14	20	
Capacitive Load Stability		$A_V = +1V/V$, no oscillations (Note 2)			650		pF
Input Noise Voltage	e_{np-p}	$f_O = 0.1Hz$ to $10Hz$, $V_S = \pm 15V$			3		$\mu Vp-p$
Differential-Mode Input Resistance	R_{IN}	$V_S = \pm 15V$			30		M Ω
Common-Mode Input Resistance	R_{INCM}	$V_S = \pm 15V$			20		G Ω

High-Precision, Low-Voltage, Micropower Op Amp

MAX480

ELECTRICAL CHARACTERISTICS

($V_S = \pm 1.5V$ to $\pm 15V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MAX480C			MAX480E			MAX480M			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V _{OS}			40	220		50	250		70	300		μV
Input Offset Voltage Drift	TCV _{OS}	(Note 2)		0.3	2.0		0.3	2.0		0.3	2.0		μV/°C
Input Offset Current	I _{OS}	V _{CM} = 0		0.2	5.0		0.3	7.0		0.5	10.0		nA
Input Bias Current	I _B	V _{CM} = 0		1	15		2	20		3	30		nA
Large-Signal Voltage Gain	A _{VO}	V _S = ±15V, V = ±10V	R _L = 100kΩ	350	950		350	800		60	400		V/mV
			R _L = 10kΩ	130	400		130	400		45	240		
			R _L = 2kΩ	55	125		55	150		30	110		
		V ₊ = 5V, V ₋ = 0, 1V < V _O < 4V	R _L = 100kΩ	50	360		50	280		35	200		
			R _L = 10kΩ	30	150		30	140		22	110		
Input Voltage Range	IVR	V ₊ = 5V, V ₋ = 0		0/3.5		0/3.5		0/3.5				V	
		V _S = ±15V (Note 1)		-15/13.5		-15/13.5		-15/13.5					
Output Voltage Swing	V _O	V _S = ±15V	R _L = 10kΩ	±13.5 ±14		±13.5 ±14		±13.5 ±13.7				V	
			R _L = 2kΩ	±9.5 ±11.8		±9.5 ±11.8		±10.5 ±11.5					
	V _{OH}	V ₊ = 5V, V ₋ = 0 R _L = 2kΩ		3.9	4.1		3.9	4.1		3.9	4.1		
	V _{OL}	V ₊ = 5V, V ₋ = 0 R _L = 10kΩ		100	500		100	500		100	500		μV
Common-Mode Rejection Ratio	CMRR	V ₊ = 5V, V ₋ = 0, 0 < V _{CM} < 3.5V		85	110		85	110		80	105		dB
		V _S = ±15V, -15V < V _{CM} < 13.5V		90	120		90	120		85	115		
Power-Supply Rejection Ratio	PSRR			1.0	12		1.0	12		3.2	15		μV/V
Supply Current	I _{SY}	V _S = ±1.5V		12	25		13	25		15	25		μA
		V _S = ±15V		16	30		17	30		19	30		


Note 1: Guaranteed by CMRR test.

Note 2: Guaranteed by design.

High-Precision, Low-Voltage, Micropower Op Amp

Typical Operating Characteristics

($T_A = +25^\circ\text{C}$, unless otherwise noted.)






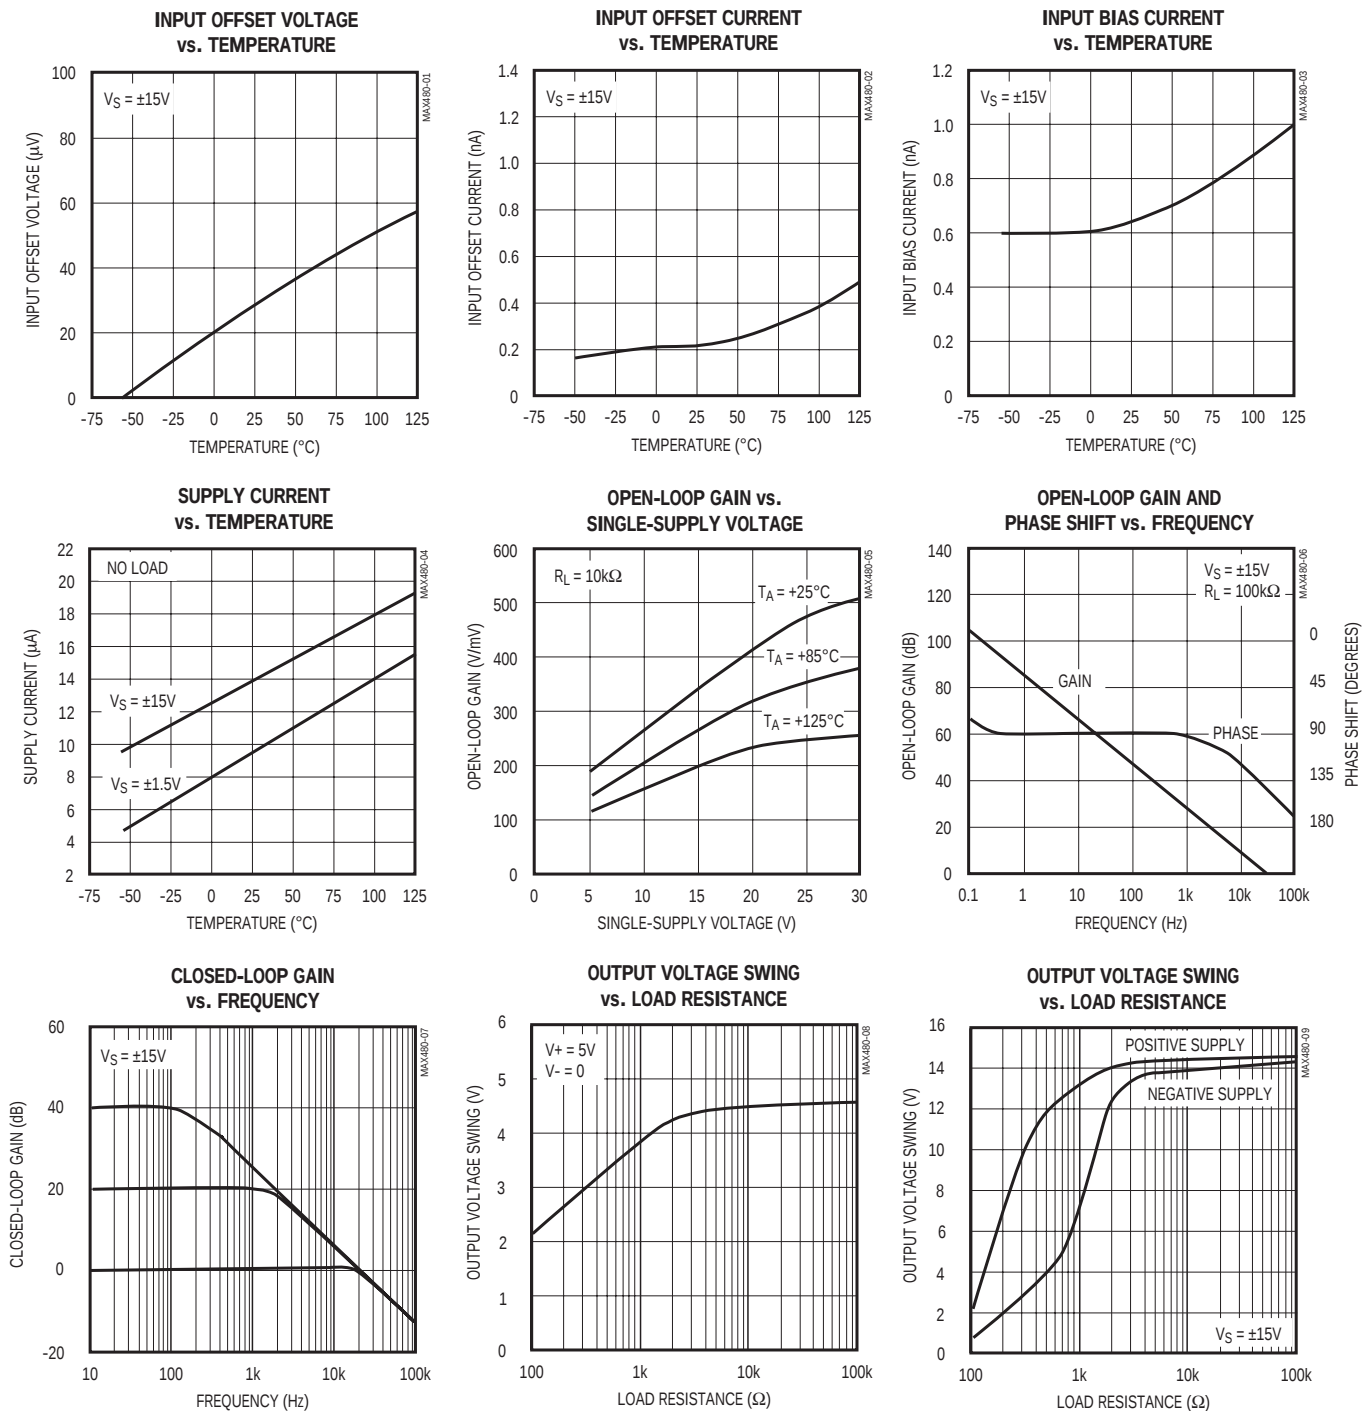


High-Precision, Low-Voltage, Micropower Op Amp

Typical Operating Characteristics (continued)

($T_A = +25^\circ\text{C}$, unless otherwise noted.)

MAX480

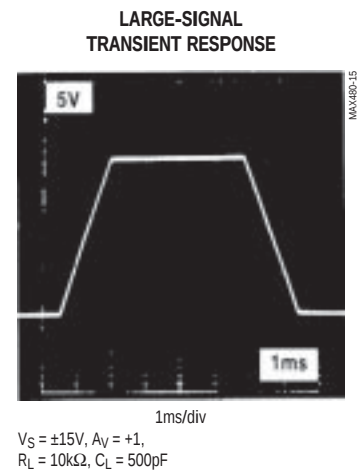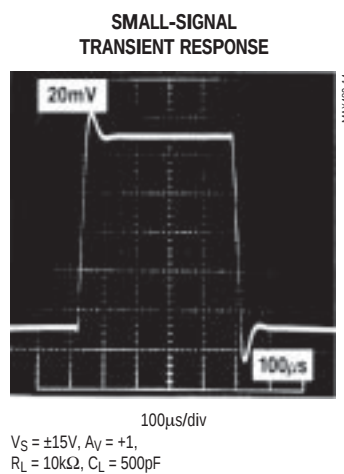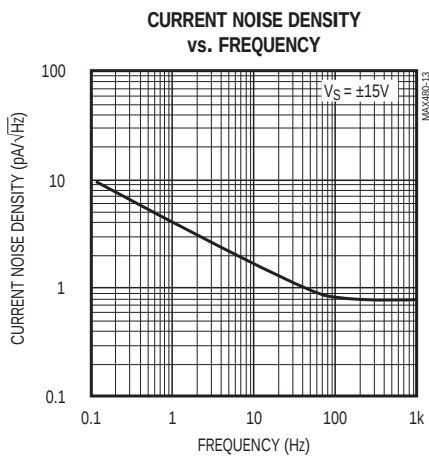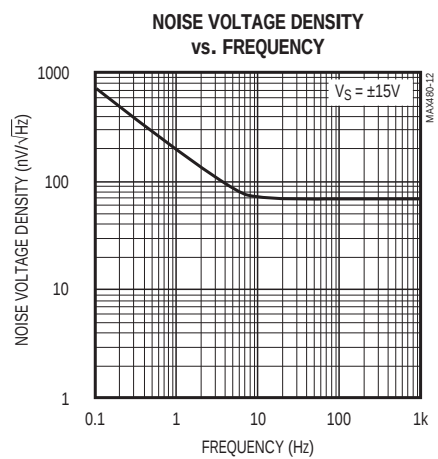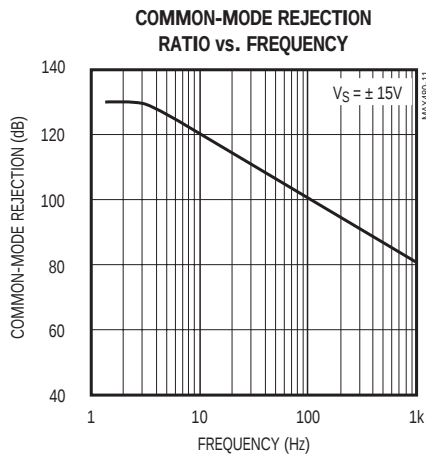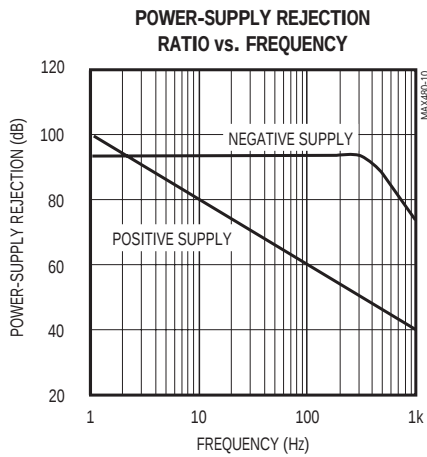

High-Precision, Low Voltage, Micropower Op Amp

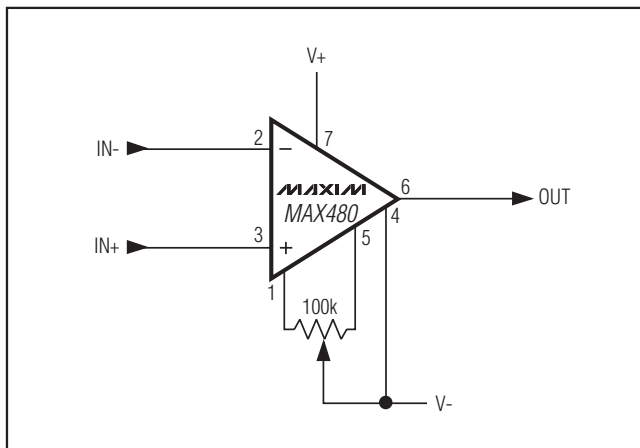


Figure 1. Offset Nulling Circuit

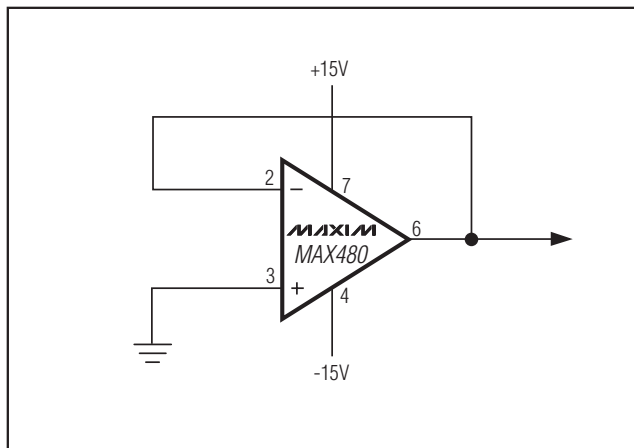


Figure 2. Burn-In Circuit

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

TOP VIEW

FRONT VIEW

SIDE VIEW

NOTES:
1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15mm (.006").
3. LEADS TO BE COPLANAR WITHIN 0.10mm (.004").
4. CONTROLLING DIMENSION: MILLIMETERS.
5. MEETS JEDEC MS012.
6. N = NUMBER OF PINS.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.053	0.069	1.35	1.75
A1	0.004	0.010	0.10	0.25
B	0.014	0.019	0.35	0.49
C	0.007	0.010	0.19	0.25
e	0.050 BSC		1.27 BSC	
E	0.150	0.157	3.80	4.00
H	0.228	0.244	5.80	6.20
L	0.016	0.050	0.40	1.27

VARIATIONS:

DIM	INCHES		MILLIMETERS		N	MS012
	MIN	MAX	MIN	MAX		
D	0.189	0.197	4.80	5.00	8	AA
D	0.337	0.344	8.55	8.75	14	AB
D	0.386	0.394	9.80	10.00	16	AC

DALLAS SEMICONDUCTOR **MAXIM**

PROPRIETARY INFORMATION

TITLE: PACKAGE OUTLINE, .150" SOIC

APPROVAL	DOCUMENT CONTROL NO. 21-0041	REV. B	1/1
----------	------------------------------	--------	-----

SOICN.EPS

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

6 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[MAX480CPA](#) [MAX480CSA](#) [MAX480CSA+](#) [MAX480CSA+T](#) [MAX480CSA-T](#) [MAX480EPA](#) [MAX480ESA](#)
[MAX480ESA+](#) [MAX480ESA+T](#) [MAX480ESA-T](#) [MAX480C/D](#)