

High Frequency Ceramic Solutions

1.4GHz High Rejection Band Pass Filter. Recommended Application: D-Band MoCA

P/N 1400BP41A0550

Detail Specification: 2/25/2014

Page 1 of 3

General Specifications

Part Number	1400BP41A0550		
Frequency (MHz)	1125 ~ 1675		
Impedance (Ohm)	75		
Insertion Loss (dB)	1.8 max. @ 25°C 2.0 max. @ -40~85°C		
Return Loss	9.0 dB min.		
Attenuation (min.)	30 min. @ 5 ~ 864MHz		
Attenuation (min.)	34 min. @ 865 ~ 1002MHz	Solder Paste	SAC 305 type is recommended.
Attenuation (min.)	32 min. @ 2300 ~ 3000MHz	Power Capacity	1W max.(CW)
Reel Quantity	2,000	Storage Temperature Range*	+5 ~ +35°C, Humidity: 45~75%RH
Operating Temperature	-40 to +85°C		



18 months max in vacuum sealed bag, after bag opened, 1 week cumulative, Please keep unused parts in vacuum sealed bags at all times. For more info go to www.johansontechnology.com/silverleads.

P/N Suffix	Packing Style	Bulk	Suffix = S	eg. 1400BP41A0550S
		T & R	Suffix = E	eg. 1400BP41A0550E
	Evaluation Board	1400BP41A0550-EB1SMA (2 Female SMA connectors 75Ω)		


Mechanical Specifications

	In	mm	
L	0.126 ± 0.008	3.20 ± 0.20	
W	0.098 ± 0.008	2.50 ± 0.20	
T	0.079 max.	2.0 max	
a	0.047 ± 0.006	1.20 ± 0.15	
b	0.024 ± 0.008	0.60 ± 0.20	
c	0.012 ± 0.006	0.30 ± 0.15	
d	0.008 ± 0.006	0.20 ± 0.15	


Terminal Configuration

No.	Function
1	IN/OUT
2	IN/OUT
3	GND

Mounting Considerations

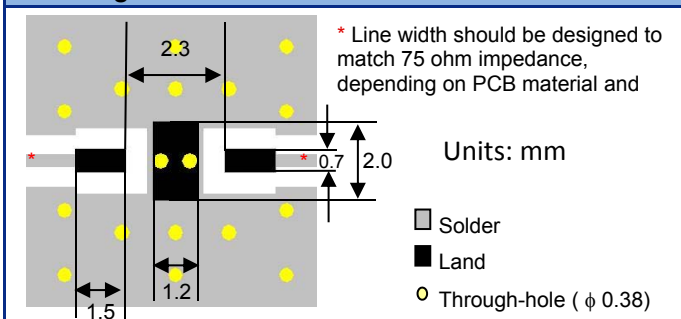

Measuring Diagram

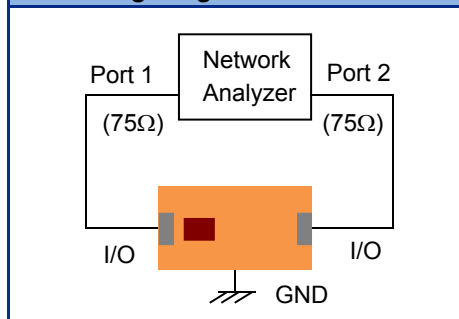

Want the layout file of the above? Send us a message at: www.johansontechnology.com/component/techquestion

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 2.0

2014 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


1.4GHz High Rejection Band Pass Filter. Recommended Application: D-Band MoCA

P/N 1400BP41A0550

Detail Specification: 2/25/2014


Page 2 of 3

Electrical Characteristics (T=25°C)

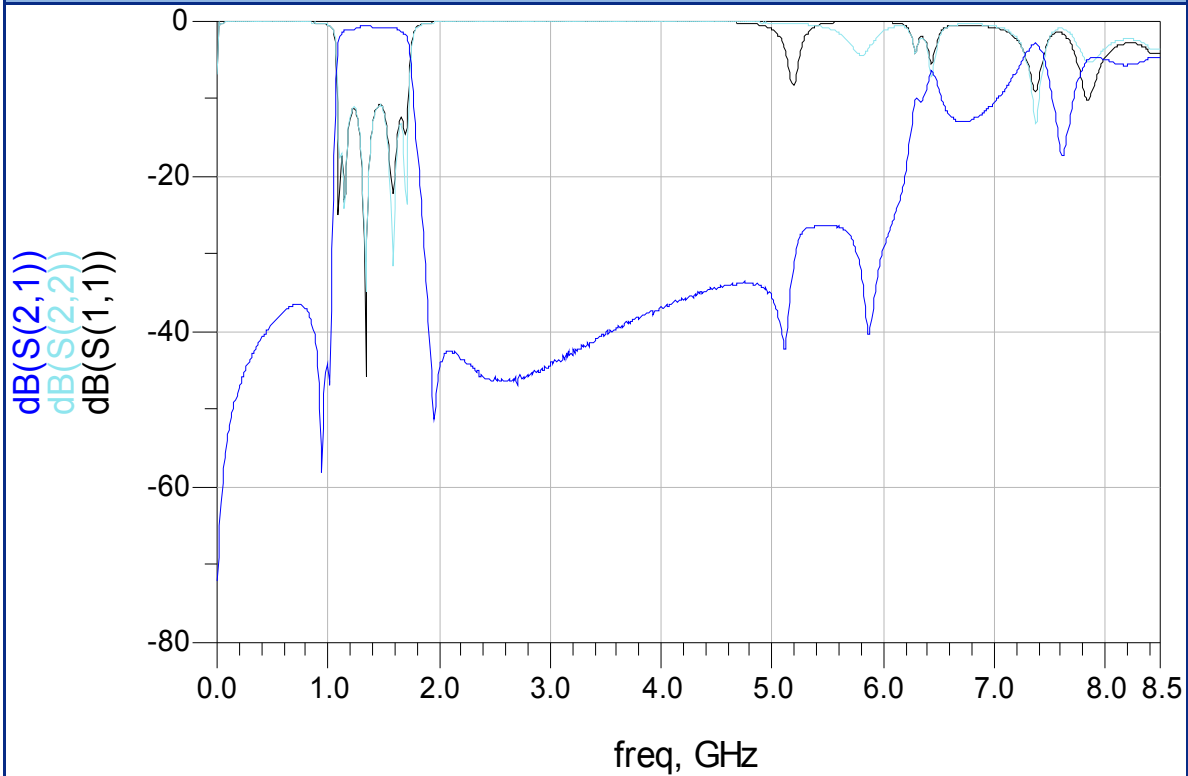

Application note for MoCA D-Band

Matching might be needed for MoCA D-Band, see diagram below using a wire-wound inductor and HighQ capacitor

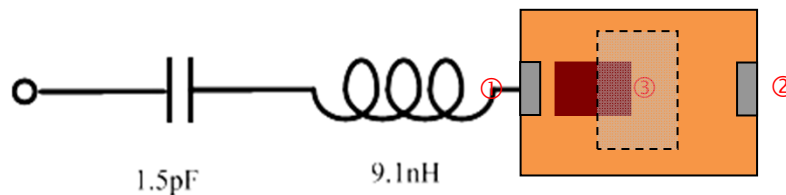

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver. 2.0 2014 Johanson Technology, Inc. All Rights Reserved


High Frequency Ceramic Solutions

Detail Specification: 2/25/2014

P/N 1400BP41A0550

Page 2 of 3

Electrical Characteristics (T=25°C) with L/C Series network on Page 2

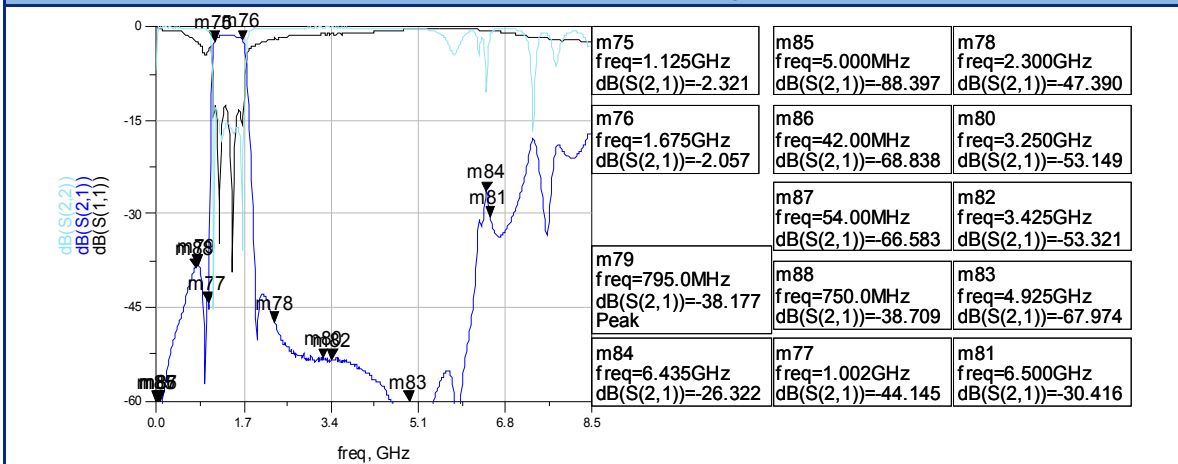

Packaging information

www.johansontechnology.com/ipcpackaging.html

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

RoHS Compliance

www.johansontechnology.com/technical-notes/rohs-compliance.html

MSL Info

www.johansontechnology.com/technical-notes/msl-rating.html

To Download Measured S-parameters for Evaluation and Simulation:

www.johansontechnology.com/bpf

For layout review contact our Applications Team at:

www.johansontechnology.com/component/techquestion?Itemid=407

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver. 2.0 2014 Johanson Technology, Inc. All Rights Reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Johanson:](#)

[1400BP41A0550E](#) [1400BP41A0550001E](#)