

RESISTOR WIREWOUND CHASSIS MOUNT

RWC SERIES



KEY FEATURES

- Resistances from 0.005 to 250kOhms
- Tolerance to $\pm 0.01\%$
- High Temperature: -55°C to $+275^{\circ}\text{C}$
- Low TCR: $\pm 20\text{ppm}/^{\circ}\text{C}$
- Power Rating 5 to 300 Watts
- Excellent Pulse Handling
- Non-Inductive windings available
- Four Terminal Versions Available (Call Factory)

APPLICATIONS

- Motor Control
- Braking Systems
- Welding
- X-Ray

PRODUCT SUMMARY

PRODUCT SERIES (RWC)	RESISTANCE RANGE (Ω) ¹	POWER RATING (W @ 25°C)			DIELECTRIC STRENGTH	TEMPERATURE COEFFICIENT	TEMPERATURE RANGE
		FREE AIR	COMMERCIAL	MIL			
G1	0.01 to 22K	4.5	7.5 ^a	5 ^a	1500 VAC	$\diamond >10\Omega$: $\pm 20\text{ppm}/^{\circ}\text{C}$ $\diamond 1\Omega$ to 10Ω : $\pm 50\text{ppm}/^{\circ}\text{C}$ $\diamond <1\Omega$: Call Factory	-55°C to $+275^{\circ}\text{C}$
G2	0.01 to 47K	7.5	12.5 ^a	10 ^a	1500 VAC		
G3	0.01 to 90K	12	25 ^b	20 ^b	2500 VAC		
G4	0.01 to 250K	20	50 ^c	30 ^c	3500 VAC		

TOLERANCE: ± 0.01 to $\pm 10\%$ (1% Standard)

¹ For non-inductive windings, divide maximum resistance by 2

^a Heatsink required: 0.040 [1.0] Aluminum Plate, 129 in² [832 cm²] or equiv.

^b Heatsink required: 0.040 [1.0] Aluminum Plate, 167 in² [1077 cm²] or equiv.

^c Heatsink required: 0.059 [1.5] Aluminum Plate, 291 in² [1877 cm²] or equiv.

^d Heatsink required: 0.125 [3.2] Aluminum Plate, 294 in² [1896 cm²] or equiv.

^e Heatsink required: 0.125 [3.2] Aluminum Plate, 895 in² [5780 cm²] or equiv.

AVAILABLE OPTIONS (Consult Factory)

- Special Testing Requirements
- Special Pulse Requirements

HOW TO ORDER

RWC	N	G1	U	003K8	F	S
RESISTOR WIRE-WOUND CHASSIS MOUNT	WINDINGS	PACKAGE CODE, WATTS (COMMERCIAL), RESISTANCE	TEMPERATURE COEFFICIENT OF RESISTANCE (TCR)	RESISTANCE	TOLERANCE	PACKING
	S = Standard N = Non-Inductive	G1, 7.5W, [0.01 to 22k] Ω G2, 12.5W, [0.01 to 47k] Ω G3, 25.0W, [0.01 to 90k] Ω G4, 50.0W, [0.01 to 250k] Ω	U = $\pm 20\text{ppm}/^{\circ}\text{C}$ Q = $\pm 50\text{ppm}/^{\circ}\text{C}$ Z = Special	038R0 = 38 Ω 003K8 = 3.8K Ω 038K0 = 38.0K Ω 380K0 = 380.0K Ω 003M8 = 3.8M Ω Letter denotes decimal place. R = decimal., "K" 10^3 , "M" 10^6 Remaining 4 digits are significant or placeholders.	T = $\pm 0.01\%$ Q = $\pm 0.02\%$ A = $\pm 0.05\%$ B = $\pm 0.1\%$ F = $\pm 1.0\%$ J = $\pm 5.0\%$ K = $\pm 10.0\%$	S = Bulk

For Tin/Lead coated leads, add "- Pb" to part number.

Standard Termination Finish: Matte Tin (Sn)

Example P/N: RWCNG1U003K8FS is Resistor Wirewound Chassis Mount, Non-Inductive, 7.5W, $\pm 20\text{ppm}/^{\circ}\text{C}$, 3.8K Ω , $\pm 1.0\%$, bulk




RESISTOR WIREWOUND CHASSIS MOUNT

RWC SERIES



MECHANICAL CHARACTERISTICS

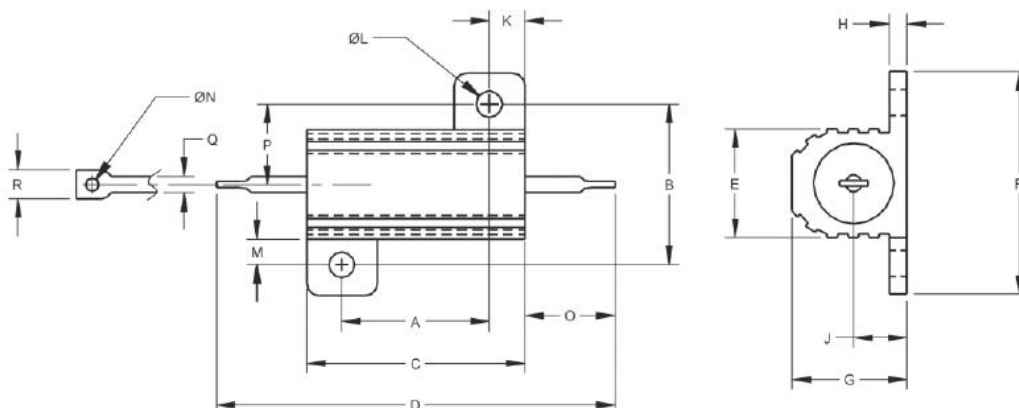

Package Code		G1	G2	G3	G4
Dimensions Inches [mm]	A (Tolerances) ±0.005 [±0.13 mm]	0.444 [11.28]	0.562 [14.27]	0.719 [18.26]	1.563 [39.70]
	B (Tolerances) ±0.005 [±0.13 mm]	0.490 [12.45]	0.625 [15.88]	0.781 [19.84]	0.844 [21.44]
	C (Tolerances) ±0.031 [±0.79 mm]	0.600 [15.24]	0.750 [19.05]	1.062 [26.97]	1.968 [49.99]
	D (Tolerances) ±0.062 [±1.57 mm]	1.125 [28.58]	1.320 [33.53]	1.870 [47.50]	2.760 [70.10]
	E (Tolerances) ±0.015 [±0.38 mm]	0.334 [8.48]	0.430 [10.92]	0.530 [13.46]	0.615 [15.62]
	F (Tolerances) ±0.015 [±0.38 mm]	0.646 [16.41]	0.800 [20.32]	1.080 [27.43]	1.140 [28.96]
	G (Tolerances) ±0.015 [±0.38 mm]	0.320 [8.13]	0.400 [10.16]	0.560 [14.22]	0.615 [15.62]
	H (Tolerances) ±0.010 [±0.25 mm]	0.065 [1.65]	0.075 [1.91]	0.085 [2.16]	0.085 [2.16]
	J (Tolerances) ±0.010 [±0.25 mm]	0.140 [3.56]	0.190 [4.83]	0.260 [6.60]	0.300 [7.62]
	K (Tolerances) ±0.010 [±0.25 mm]	0.078 [1.98]	0.093 [2.36]	0.172 [4.37]	0.196 [4.98]
	L (Tolerances) ±0.005 [±0.13 mm]	0.093 [2.36]	0.093 [2.36]	0.125 [3.18]	0.125 [3.18]
	M (Tolerances) ±0.015 [±0.38 mm]	0.078 [1.98]	0.102 [2.60]	0.125 [3.18]	0.125 [3.18]
	N (Tolerances) ±0.006 [±0.15 mm]	0.050 [1.27]	0.080 [2.03]	0.080 [2.03]	0.080 [2.03]
	O (Tolerances) ±0.062 [±1.57 mm]	0.266 [6.76]	0.312 [7.93]	0.438 [11.13]	0.438 [11.13]
	P (Tolerances) ±0.031 [±0.79 mm]	0.245 [6.22]	0.312 [7.92]	0.391 [9.93]	0.422 [10.72]
	Q (Tolerances) ±0.002 [±0.05 mm]	0.051 [1.30]	0.098 [2.49]	0.098 [2.49]	0.098 [2.49]
	R (Tolerances) ±0.031 [±0.79 mm]	0.085 [2.16]	0.160 [4.06]	0.185 [4.70]	0.185 [4.70]
MIL-R-39009 / MIL-R-18546		RER-60 / RE-60	RER-65 / RE-65	RER-70 / RE-70	RER-75 / RE-75



RESISTOR WIREWOUND CHASSIS MOUNT

RWC SERIES




ENVIRONMENTAL PERFORMANCE

Environmental Performance (MIL-STD 202)	ΔR
Vibration	$\pm 0.1 \% + 0.05 \Omega$
Load Life	$\pm 1 \% + 0.05 \Omega$
Moisture Resistance	$\pm 0.2 \% + 0.05 \Omega$
Dielectric	$\pm 0.2 \% + 0.05 \Omega$
Storage	$\pm 0.2 \% + 0.05 \Omega$
Shock	$\pm 0.1 \% + 0.05 \Omega$
Thermal Shock	$\pm 0.2 \% + 0.05 \Omega$
5X Overload (5s)	$\pm 0.2 \% + 0.05 \Omega$

CONSTRUCTION NOTES:

- ♦ Centerless ground ceramic core
- ♦ Tinned copper or copperweld leads
- ♦ All welded terminations
- ♦ High Temperature epoxy molding compound
- ♦ Anodized aluminum housing

Moisture Sensitivity Level: MSL-1

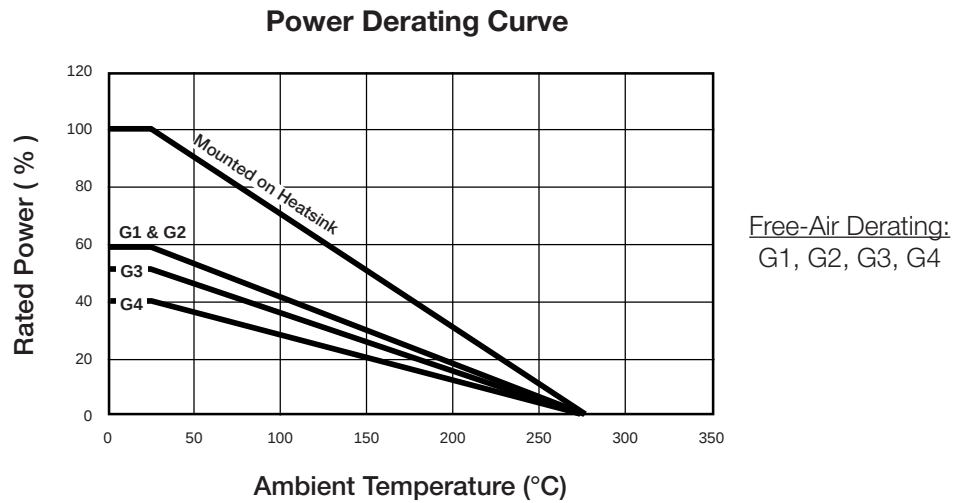

This datasheet is subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Johanson:

RWCSG4U500R0FS	RWCSG4U300R0FS	RWCSG4U750R0FS	RWCSG1U005K0FS	RWCSG3Q000R2FS
RWCSG1Q003R3FS	RWCSG2U075R0FS	RWCSG4U005K0FS	RWCSG4U012R0FS	RWCSG4Q010R0FS
RWCSG1Q002R5FS	RWCSG3U010K0FS	RWCSG1U015R0FS	RWCSG1Q001R5FS	RWCSG2U250R0FS
RWCSG4U001K5FS	RWCSG2U040R0FS	RWCSG1U015K0FS	RWCSG1Q007R5FS	RWCSG2U020K0FS
RWCSG2Q005R0FS	RWCSG1U010K0FS	RWCSG2Q00R15FS	RWCSG1U330R0FS	RWCSG1Q005R0FS
RWCSG3Q007R5FS	RWCSG1U050R0FS	RWCSG3Q001R0BS	RWCSG3Q00R15FS	RWCSG4Q002R0FS
RWCSG1U500R0FS	RWCSG4U050R0FS	RWCSG4Q002R5FS	RWCSG2U002K0FS	RWCSG3U750R0FS
RWCSG1Q000R2FS	RWCSG4Q003R0FS	RWCSG2Q010R0FS	RWCSG4U030R0FS	RWCSG3Q00R25FS
RWCSG3U050R0FS	RWCSG3U250R0FS	RWCSG4U100R0FS	RWCSG1Q000R3FS	RWCSG2Q00R25FS
RWCSG3Q002R0BS	RWCSG1U001K0FS	RWCSG1U390R0FS	RWCSG3U002K0FS	RWCSG4U025K0FS
RWCSG2U050R0FS	RWCSG4U200R0FS	RWCSG3U001K0FS	RWCSG3Q002R0FS	RWCSG3Q000R1FS
RWCSG2U010K0FS	RWCSG1U001K5FS	RWCSG2U025R0FS	RWCSG4U020R0FS	RWCSG2U150R0FS
RWCSG2Q003R3FS	RWCSG3U015R0FS	RWCSG3Q000R5FS	RWCSG4U015R0FS	RWCSG1Q003R0FS
RWCSG1U030R0FS	RWCSG1U100R0FS	RWCSG1U250R0FS	RWCSG4U150R0FS	RWCSG1U750R0FS
RWCSG4U025R0FS	RWCSG3U015K0FS	RWCSG4Q00R15FS	RWCSG3U025R0FS	RWCSG2Q001R0FS
RWCSG2Q003R0FS	RWCSG4U002K5FS	RWCSG4U250R0FS	RWCSG2Q001R5FS	RWCSG2U030R0FS
RWCSG2U015R0FS	RWCSG1U002K0FS	RWCSG3Q000R3FS	RWCSG2U002K5FS	RWCSG3U030K0FS
RWCSG1U020R0FS	RWCSG1U040R0FS	RWCSG3Q001R5FS	RWCSG1Q001R0FS	RWCSG4Q000R1FS
RWCSG1Q000R5FS	RWCSG4Q003R3FS	RWCSG2Q000R3FS	RWCSG2U330R0FS	RWCSG3Q010R0FS
RWCSG2Q002R5FS	RWCSG4U010K0FS	RWCSG2U001K0FS	RWCSG3U001K5FS	RWCSG3U150R0FS