

PS25012 EPIC sensor, single sensor applications PCB Datasheet

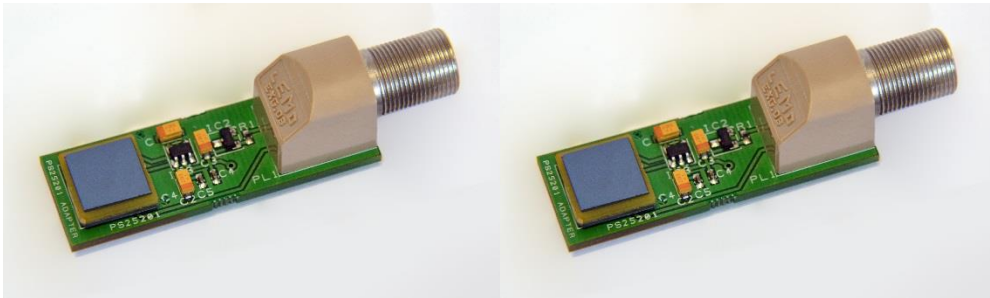


Figure 1: PS25012A1 single channel board carrying a single PS2501A sensor

Figure 2: PS25012B1 dual channel board carrying two PS2501A sensors

The PS25012A1 and PS25012B1 are single and dual channel application boards for the demonstration of the Plessey PS2501A electric potential sensor.

The PS2501A electric potential sensors on these boards allow the measurement of a wide range of electric potential sources from electrophysiological signals through to spatial electric field. The sensors incorporate a DC block feature that allows the DC component of an applied signal to be rejected while maintaining good low frequency response. The electrode surface of the detector is passivated with a thin dielectric that allows the direct application to a test surface. In the case of contact with skin there is no need for electrically conductive gel.

The PS2501A sensor demonstrated on these boards is an integrated assembly designed for surface mount assembly on a motherboard.

The application boards provide the regulated +2.5V and generated -2.5V supplies that are used to operate the sensor. This allows the boards to demonstrate the sensors from a wide, single sided, power supply voltage while the output of the sensor can cover the range $\pm 2.1V$. The boards are connected by a high reliability five pin connector.

Two single channel PS25012A1 boards or a dual channel PS25012B1 board may be used to generate a differential signal. A typical example is shown in Figure 3 below:

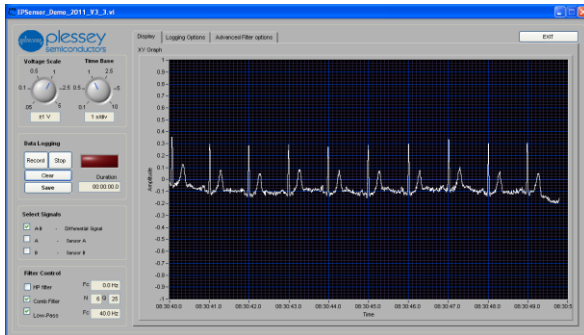


Figure 3: Differential signal from two sensors in contact with the skin showing ECG type characteristics

Electrical Characteristics

These electrical characteristics apply to the PS25012A1 and PS25012B1 application boards that carry the PS2501A sensors. The electrical characteristics (@25°C) are guaranteed by either production test or by design and characterisation. They apply within the specified supply voltage unless otherwise stated.

Characteristics	Value			Units	Conditions/Notes
	Min.	Typ.	Max.		
Supply voltage	4.0		8.0	V	
Supply current; PS25012A1	2.7		10.0	mA	Each PS2501A sensor consumes 2.0mA (typ). The additional current is consumed by the app'n board.
Supply current; PS25012B1	5.4		20.0	mA	
Input resistance (R _{in})		50		GΩ	
Input capacitance		10		pF	
Voltage Gain (A _v)		50			
Coupling capacitance		250		pF	Sensor to skin
Lower 3dB point		0.200		Hz	
Upper 3dB point		4.0		kHz	
Noise		tbid			

Electrical Connector

The PS25012A1 and PS25012B1 application boards are fitted with one or two five pin sockets. The connectivity of these sockets is shown below:

- Pin 1 Output
- Pin 2 Gnd
- Pin 3 Supply



Pin 4 Gnd

Pin 5 Not used

The supply and ground connections of the two sockets on the dual channel PS25012B board are connected in parallel so that the board will be active with either one or both connectors in use. However, when both sockets are powered the supplied voltages must be identical.

Auxiliary Components

PS25000A Control and Interface Box; 50Hz.

This box provides power for one or two sensors. It incorporates switchable low pass and 50Hz notch filters. The box contains an amplifier with switchable gain of either x1 or x10. The box also generates a differential signal from two sensors. The box incorporates a data acquisition card that provides the data from the sensors via a USB cable to a computer. The box is powered by the USB connection. A soft scope is provided with this box for display of the signals on a computer.

PS25001A Control and Interface Box; 60Hz.

This box is identical to the PS25000A except that the switchable notch filter is preset to reject 60Hz.

PS25013 Adapter cable.

This 1.5m long cable connects the sockets of the PS25012A and PS25012B application boards to the PS25000A or PS25001A Control and Interface Box.

Customer Enquiries/Sales

+44 1752 693000 | sales@plesseysemi.com

www.plesseysemi.com

Plessey Semiconductors Ltd | Plymouth

Tamerton Road, Roborough

Plymouth, Devon

PL6 7BQ

United Kingdom

P: +44 1752 693000

F: +44 1752 693700

Legal Notice

Product information provided by Plessey Semiconductors Limited ("Plessey") in this document is believed to be correct and accurate. Plessey reserves the right to change/correct the specifications and other data or information relating to products without notice but Plessey accepts no liability for errors that may appear in this document, howsoever occurring, or liability arising from the use or application of any information or data provided herein. Neither the supply of such information, nor the purchase or use

of products conveys any license or permission under patent, copyright, trademark or other intellectual property right of Plessey or third parties.

Products sold by Plessey are subject to its standard Terms and Conditions of Sale that are available on request. No warranty is given that products do not infringe the intellectual property rights of third parties, and furthermore, the use of products in certain ways or in combination with Plessey, or non-Plessey furnished equipments/components may infringe intellectual property rights of Plessey.

The purpose of this document is to provide information only and it may not be used, applied or reproduced (in whole or in part) for any purpose nor be taken as a representation relating to the products in question. No warranty or guarantee express or implied is made concerning the capability, performance or suitability of any product, and information concerning possible applications or methods of use is provided for guidance only and not as a recommendation. The user is solely responsible for determining the performance and suitability of the product in any application and checking that any specification or data it seeks to rely on has not been superseded.

Products are intended for normal commercial applications. For applications requiring unusual environmental requirements, extended temperature range, or high reliability capability (e.g. military or medical applications), special processing/testing/conditions of sale may be available on application to Plessey

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Plessey Semiconductors:](#)

[PS25012A1](#) [PS25012B1](#)