
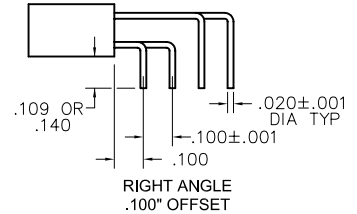




LEAD CONFIGURATION OPTIONS



PLUG: MA-2F1-010-325-A5200
RECEPTACLE: MA-241-010-261-A53WA
 XX-XXX-XXX-XXX-XXXXX

PLUG

RECEPTACLE

SERIES

MA .050" Microminiature Strip Connector | MA .050" Microminiature Strip Connector

BODY

2	2-Row	2	2-Row
	BODY STYLE: (Material: Polyphenylene sulfide)		BODY STYLE: (Material: Polyphenylene sulfide)
11	Plug, straight, with mounting holes	21	Receptacle, straight, with mounting holes
31	Plug, straight, without mounting holes	41	Receptacle, straight, without mounting holes
51	Plug, right angle, .050" offset, with mounting holes	61	Receptacle, right angle, .050" offset, with mounting holes
71	Plug, right angle, .100" offset, with mounting holes	81	Receptacle, right angle, .100" offset, with mounting holes
91	Plug, right angle, .050" offset, without mounting holes	A1	Receptacle, right angle, .050" offset, without mounting holes
B1	Plug, right angle, .100" offset, without mounting holes	C1	Receptacle, right angle, .100" offset, without mounting holes
D1	Plug, right angle, in line, with mounting holes	E1	Receptacle, right angle, in line, with mounting holes
F1	Plug, right angle, in line, without mounting holes	G1	Receptacle, right angle, in line, without mounting holes
H1	Plug, straight, .100" offset, without mounting holes	J1	Receptacle, straight, .100" offset, without mounting holes

SIZE

XXX 004- 128

XXX 004-128

Note: Maximum number of contacts is reduced when using hardware or mounting holes. See dimension chart on M-25.

CONTACTS

TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:	
11	Pin, straight, solder cup	21	Socket, straight, solder cup
12	Pin, straight, PCB leads, .109"	22	Socket, straight, PCB leads, .109"
13	Pin, straight, PCB leads, .140"	23	Socket, straight, PCB leads, .140"
14	Pin, straight, .500" pigtails (.018 dia)	24	Socket, straight, .500" pigtails (.018 dia)
15	Pin, straight, 1.000" pigtails (.018 dia)	25	Socket, straight, 1.000" pigtails (.018 dia)
16	Pin, straight, crimped wire	26	Socket, straight, crimped wire
32	Pin, right angle, PCB leads, .109"	43	Socket, right angle, PCB leads, .109"
33	Pin, right angle, PCB leads, .140"	44	Socket, right angle, PCB leads, .140"
PLATING OPTIONS:		PLATING OPTIONS:	
1	50 μ" Au contacts (crimp wire)	1	50 μ" Au contacts (crimp wire)
3	50 μ" Au contacts: 10 μ" Au terminations (solder cup, pigtail, PCB leads)	3	50 μ" Au contacts: 10 μ" Au terminations (solder cup, pigtail, PCB leads)
5	50 μ" Au contacts; Sn/Pb alloy terminations (pigtail, PCB leads) ☒	5	50 μ" Au contacts; Sn/Pb alloy terminations (pigtail, PCB leads) ☒
7	50 μ" Au contacts; SAC305 terminations (pigtail, PCB leads)	7	50 μ" Au contacts; SAC305 terminations (pigtail, PCB leads)

HARDWARE

STYLE OF HARDWARE:		STYLE OF HARDWARE:	
A00	None	A00	None
ABC	Latch box, side mounted (centered)* See page M-27	ALC	Latch spring, side mounted (centered)* See page M-27
A50	Latch boxes (two end cavities). See page M-27**	A51	Latch springs, (two end cavities). See page M-27**
A52	Latch boxes (two end cavities). See page M-27**	A53	Latch springs, (two end cavities). See page M-27**
A54	Latch boxes (two end cavities). See page M-27**	A55	Latch springs, (two end cavities). See page M-27**
A56	Latch boxes (two end cavities). See page M-27**	A57	Latch springs, (two end cavities). See page M-27**
A64	One guide hole (centered)*	A61	One guide pin (centered)*
A65	One guide hole (first cavity)	A62	One guide pin (first cavity)
A66	One guide hole (last cavity)	A63	One guide pin (last cavity)
A68	Two guide holes (first & last cavity)	A67	Two guide pins (first & last cavity)
AHX	One guide hole (cavity #2 - #9)	APX	One guide pin (cavity #2 - #9)
POLARIZATION / WIRING:		POLARIZATION / WIRING:	
00	None	00	None
XX	For wiring codes, see page MA-3 & MA-4	XX	For wiring codes, see page MA-3 & MA-4

* = To determine location, divide the total number of cavities (in one row) by two and round to the next whole number, if result is a fraction. See page M-28.

** = Not available with mounting holes.

See MA strip guidelines, page M-28, for location examples & visual clarification.

Connector part number must have even number of contacts.

Consult factory for non-standard requirements.

☒ = Option not RoHS compliant

2 • ROW



Strip Connectors

Board to Cable




.050"

MA-2

4 thru 128 Contacts

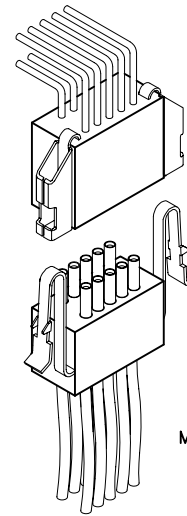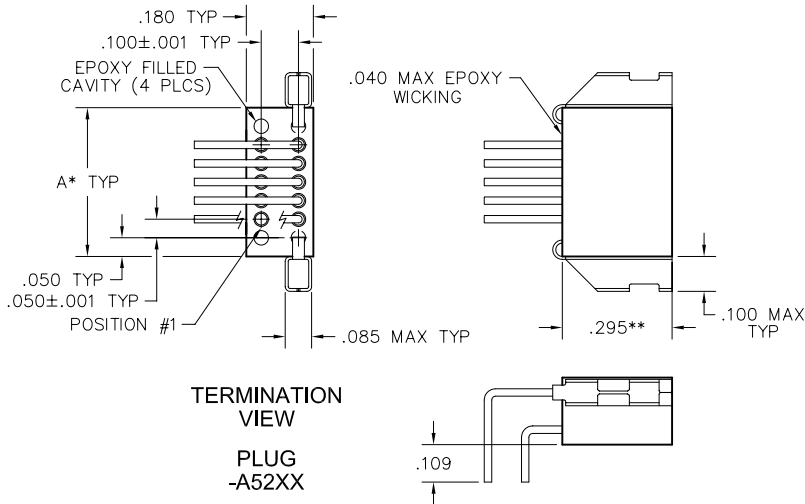

MA-241-010-261-A53WA

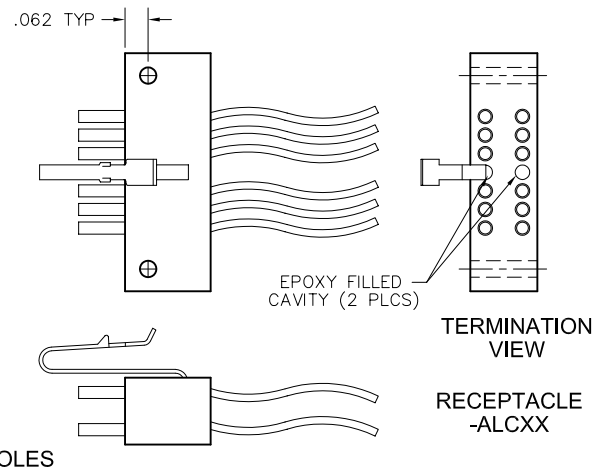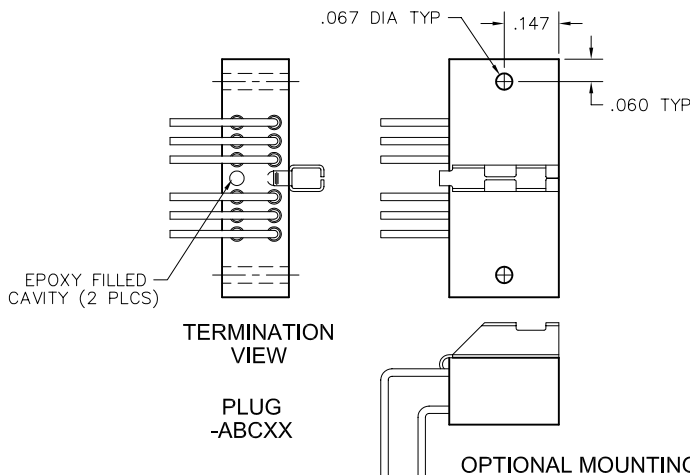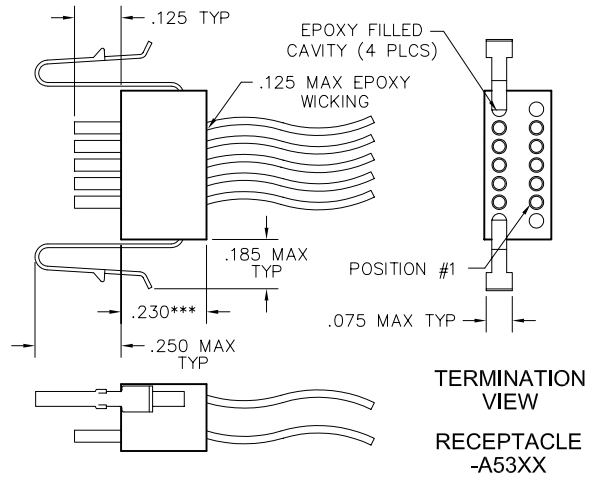

OPTIONAL MOUNTING HOLES

DIMENSIONS

To determine connector length (Dim "A"):
Multiply the number of cavities in one row by .050"
Add fixed end lengths (constant, .025" x 2)
Add .085" for each mounting hole
Total Length:

.	"
0.05	"
.	"
.	"

Notes:

Length over 2" may require support to insure alignment

* = Maximum length is 3.420". Maximum number of contacts must be reduced to accommodate hardware and mounting holes.

** = For cable applications, .295" becomes .390"

*** = For solder cup or board mount applications, .230" becomes .135"



Wire Codes

NEMA HP3-EXBEB (Formerly M16878/4-24 TFE 7 strand)

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
MIL-STD-681*	WA	WB	WC	UD	UE	WD	UG	UH	UJ	UK	UL	UM	UN	UP	UQ	UR
WHITE	WE	WF	WG	VD	VE	WH	VG	VH	VJ	VK	VL	VM	VN	VP	VQ	VR
YELLOW	WJ	WK	WL			WM										

NEMA HP3-EXBDB (Formerly M16878/4-26 TFE 7 strand)

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
MIL-STD-681*	WN	WP	WQ	YD	YE	WR	YG	YH	YJ	YK	YL	YM	YN	YP	YQ	YR
WHITE	WS	WT	WU	ZD	ZE	WV	ZG	ZH	ZJ	ZK	ZL	ZM	ZN	ZP	ZQ	ZR
YELLOW	WW	WX	WY			WZ										

NEMA HP3-EXBCB (Formerly M16878/4-28 TFE 7 strand)

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
MIL-STD-681*	XA	XB	XC	1D	1E	XD	1G	1H	1J	1K	1L	1M	1N	1P	1Q	1R
WHITE	XE	XF	XG	2D	2E	XH	2G	2H	2J	2K	2L	2M	2N	2P	2Q	2R
YELLOW	XJ	XK	XL			XM										

TWISTED PAIR per NEMA WC27500-XXRC2U00 (SAE AS22759/11)

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
24 AWG	AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK	AL	AM	AN	AP	AQ	AR
26 AWG	BA	BB	BC	BD	BE	BF	BG	BH	BJ	BK	BL	BM	BN	BP	BQ	BR

TWISTED PAIR per NEMA WC27500-XXSC2U00 (SAE AS22759/33)*** ☒

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
24 AWG	JA	JB	JC	JD	JE	JF	JG	JH	JJ	JK	JL	JM	JN	JP	JQ	JR
26 AWG	KA	KB	KC	KD	KE	KF	KG	KH	KJ	KK	KL	KM	KN	KP	KQ	KR

For twisted pair wire connect charts, see page MA-9

Twisted pair wire not available on MA, MC or Hybrid connectors

* = Connectors with more than 100 contacts will repeat color code after 100 colors.

*** = Per M83513, corrosion has been experienced on connectors that are pre-wired with 22759/33 and stored in sealed environments. Caution should be exercised when using this wire.

☒ = Option not RoHS compliant

Wire Codes

SAE AS22759/11-24

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
M83513**	5A	5B	5C	5D	5E	5F	5G	5H	5J	5K	5L	5M	5N	5P	5Q	5R
MIL-STD-681*	CA	CB	CC	CD	CE	CF	CG	CH	CJ	CK	CL	CM	CN	CP	CQ	CR
WHITE	DA	DB	DC	DD	DE	DF	DG	DH	DJ	DK	DL	DM	DN	DP	DQ	DR

SAE AS22759/11-26

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
M83513**	6A	6B	V1	6D	6E	V2	6G	6H	6J	6K	6L	Y6	6N	6P	6Q	6R
MIL-STD-681*	X3	X4	W3	ED	EE	W4	EG	EH	EJ	EK	EL	EM	EN	EP	EQ	ER
WHITE	X1	X2	W1	FD	FE	W2	FG	FH	FJ	FK	FL	Y5	FN	FP	FQ	FR

SAE AS22759/33-24*** ☒

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
M83513**	LA	LB	LC	LD	LE	LF	LG	LH	LJ	LK	LL	LM	LN	LP	LQ	LR
WHITE	MA	MB	MC	MD	ME	MF	MG	MH	MJ	MK	ML	MM	MN	MP	MQ	MR

SAE AS22759/33-26*** ☒

	6"	12"	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"	84"	96"	108"	120"
M83513**	NA	NB	Y3	ND	NE	Y4	NG	NH	NJ	NK	NL	Y8	NN	NP	NQ	NR
WHITE	PA	PB	Y1	PD	PE	Y2	PG	PH	PJ	PK	PL	Y7	PN	PP	PQ	PR

* = Connectors with more than 100 contacts will repeat color code after 100 colors.

** = Wire colors per M83513 are ten solid colors repeating.

*** = Per M83513, corrosion has been experienced on connectors that are pre-wired with 22759/33 and stored in sealed environments.

Caution should be exercised when using this wire.

☒ = Option not RoHS compliant

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AirBorn:

[MA-221-016-213-A0000](#) [MA-241-024-213-ALC00](#) [MA-221-074-213-ALC00](#) [MA-221-036-213-A0000](#) [MA-221-004-261-ALCWN](#) [MA-221-026-213-A0000](#) [MA-221-044-261-A00WG](#) [MA-241-024-261-ALCY1](#) [MA-241-012-213-ALC00](#)
[MA-241-008-225-A0000](#) [MA-231-008-125-A0000](#) [MA-241-060-235-A0000](#)