

Platinum temperature sensor in thin-film technology

M 310

M-series platinum temperature sensors are characterized by long-term stability, excellent precision over a wide temperature range and compatibility. They are used particularly for applications with high consumption volumes, typically in the automotive, white goods, HVAC and energy generation industries as well as in medical and industrial appliances and machinery.

Nominal Resistance R0	Tolerance DIN EN 60751 1996-07	Tolerance DIN EN 60751 2009-05	Order Number Plastic Box
100 Ohm at 0°C	Class B	F 0.3	32 208 721
1000 Ohm at 0°C	Class B	F 0.3	32 208 723
100 Ohm at 0°C	Class A	F 0,15	32 208 725
1000 Ohm at 0°C	Class A	F 0,15	32 208 727

The measuring point for the nominal resistance is defined at 8mm from the end of the sensor body.

Specification

DIN EN 60751

Temperature range

-70°C to +500°C (continuous operation)
(temporary use to 550°C possible)
Tolerance Class B: -70°C up to +500°C
Tolerance Class A: -50°C up to +300°C

Temperature coefficient

$$\text{TCR} = 3850 \text{ ppm/K}$$

Leads

Pt clad Ni- wire
Recommend connection technology:
Welding, Crimping and Brazing

Lead lengths (L)

10mm $\pm$ 1mm

Long-term stability

Max. R_0 drift 0.04% after 1000h at 500°C

Vibration resistance

At least 40g acceleration at 10 to 2000 Hz,
depends on installation

Shock resistance

At least 100g acceleration with 8 ms half sine wave, depends on installation

Ambient conditions

Use unprotected only in dry environments

Insulation resistance

> 100 MΩ at 20°C; > 2 MΩ at 500°C

Self heating

0.4 K/mW at 0°C

Response time


Water current ($v = 0.4\text{m/s}$):	$t_{0.5} = 0.04\text{s}$ $t_{0.9} = 0.12\text{s}$
Air flow ($v = 2\text{m/s}$):	$t_{0.5} = 2.5\text{s}$ $t_{0.9} = 8.0\text{s}$

Measuring current

100Ω: 0.3 to 1.0 mA
1000Ω: 0.1 to 0.3 mA
(self heating has to be considered)

Note

Other tolerances, values of resistance and wire lengths are available on request.

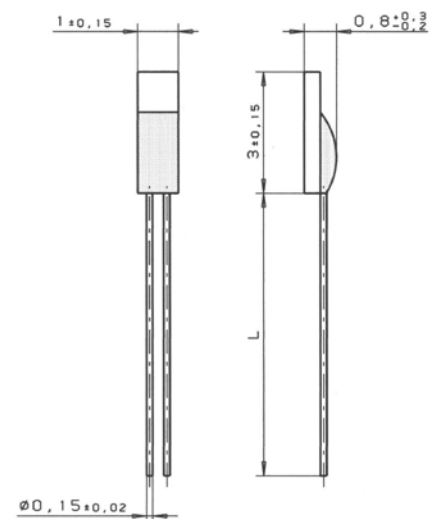

We reserve the right to make alterations and technical data printed. All technical data serves as a guideline and does not guarantee particular properties to any products.

Heraeus Sensor Technology USA

770 Township Line Road, Suite 300

Yardley, PA 19067 USA

Phone 1-215-944-9010 Fax 1-215-944-9392

Email info.hst-us@heraeus.com

www.hst-us.com

Name of document: 30910017 Index
C Status: 10/2010 06/2016

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Heraeus:

[32208730](#) [32208721](#) [32208731](#) [32208723](#) [32208725](#) [32208727](#)