

SFS30

SF

S

30

48

3R3

B

①


②

③

④

⑤

⑥

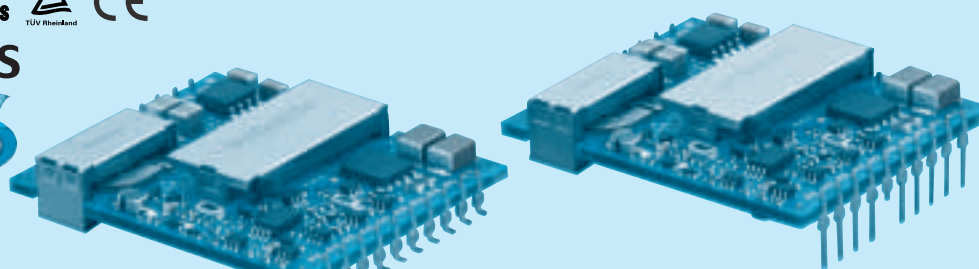

- ① Series name
 ② Single output
 ③ Output wattage
 ④ Input voltage
 24:DC18 - 36V
 48:DC36 - 76V
 ⑤ Output voltage
 ⑥ Mounting type
 (Soldering process)
 B : SMD (Pb-free solder)
 C : DIP (Pb-free solder)

MODEL	SFS30241R2	SFS30241R5	SFS30241R8	SFS30242R5	SFS30243R3	SFS302405	SFS302412	SFS302415
MAX OUTPUT WATTAGE[W]	12.48	15.6	16.2	22.5	29.7	30.0	30.0	30.0
DC OUTPUT	1.2V 10.4A	1.5V 10.4A	1.8V 9A	2.5V 9A	3.3V 9A	5V 6A	12V 2.5A	15V 2A

SPECIFICATIONS

	MODEL	SFS30241R2	SFS30241R5	SFS30241R8	SFS30242R5	SFS30243R3	SFS302405	SFS302412	SFS302415
INPUT	VOLTAGE[V]	DC18 - 36							
	CURRENT[A]	*1 0.60typ	0.74typ	0.76typ	1.04typ	1.36typ	1.36typ	1.36typ	1.39typ
	EFFICIENCY[%]	*1 86.5typ	87.5typ	89typ	90typ	91typ	92typ	92typ	90typ
	START-UP VOLTAGE[V]	DC16 - 18							
	HYSTERESIS VOLTAGE[V]	DC1 min							
OUTPUT	VOLTAGE[V]	1.2	1.5	1.8	2.5	3.3	5	12	15
	CURRENT[A]	10.4	10.4	9	9	9	6	2.5	2
	VOLTAGE ACCURACY[%]	+5, -3							
	RIPPLE[mVp-p]	25max						120max	
	RIPPLE NOISE[mVp-p]	50max						150max	
	START-UP TIME[ms]	20 - 200max (DCIN 24V, Io=100%)							
	OUTPUT VOLTAGE SETTING	*1 ±1% of rated output voltage							
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 103% of rating							
	OVERVOLTAGE PROTECTION	Works at 120 - 140% of rating							
	LOWVOLTAGE PROTECTION	Works at 90% max of rating							
	REMOTE ON/OFF	Provided(RC open : ON, short between RC and +Vin : OFF)							

MODEL	SFS30481R2	SFS30481R5	SFS30481R8	SFS304802	SFS30482R5	SFS30483R3	SFS304805	SFS304810	SFS304812	SFS304815
MAX OUTPUT WATTAGE[W]	12.48	15.6	16.2	18.0	22.5	29.7	30.0	30.0	30.0	30.0
DC OUTPUT	1.2V 10.4A	1.5V 10.4A	1.8V 9A	2V 9A	2.5V 9A	3.3V 9A	5V 6A	10V 3A	12V 2.5A	15V 2A

SPECIFICATIONS

	MODEL	SFS30481R2	SFS30481R5	SFS30481R8	SFS304802	SFS30482R5	SFS30483R3	SFS304805	SFS304810	SFS304812	SFS304815	
INPUT	VOLTAGE[V]	DC36 - 76										
	CURRENT[A]	*1 0.30typ	0.37typ	0.38typ	0.42typ	0.52typ	0.67typ	0.68typ	0.69typ	0.68typ	0.68typ	
	EFFICIENCY[%]	*1 86typ	87.5typ	89typ	89typ	91typ	92typ	92.5typ	91typ	92typ	92typ	
	START-UP VOLTAGE[V]	DC32 - 36										
	HYSTERESIS VOLTAGE[V]	DC2 min										
OUTPUT	VOLTAGE[V]	1.2	1.5	1.8	2	2.5	3.3	5	10	12	15	
	CURRENT[A]	10.4	10.4	9	9	9	9	6	3	2.5	2	
	VOLTAGE ACCURACY[%]	+5, -3										
	RIPPLE[mVp-p]	25max							120max			
	RIPPLE NOISE[mVp-p]	50max							150max			
	START-UP TIME[ms]	20 - 200max (DCIN 48V, Io=100%)										
	OUTPUT VOLTAGE SETTING *1	± 1% of rated output voltage										
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 103% of rating										
	OVERVOLTAGE PROTECTION	Works at 120 - 140% of rating										
	LOWVOLTAGE PROTECTION	Works at 90% max of rating										
	REMOTE ON/OFF	Provided(RC open : ON, short between RC and +Vin : OFF)										


GENERAL SPECIFICATIONS

ISOLATION	INPUT-OUTPUT	DC1,500V 1minute, DC500V 50MΩ min (20±15℃)
ENVIRONMENT	OPERATING TEMP.HUMID.AND ALTITUDE	-40 to +85℃, 20 - 95%RH (Non condensing), 3,000m (10,000feet) max
	STORAGE TEMP.HUMID.AND ALTITUDE	-40 to +100℃, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max (SMD:Refer to the Instruction Manual)
	VIBRATION	10 - 55Hz, 49.0m/s ² (5G), 3minutes period, 60minutes each along X, Y and Z axis
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis
SAFETY	AGENCY APPROVALS	UL60950-1, C-UL (CSA60950-1), EN60950-1
OTHERS	CASE SIZE/WEIGHT	38.7×8.0×31.2mm [1.52×0.315×1.23 inches] (W×H×D) /20g max
	COOLING METHOD	Convection/Forced air


*1 At rated input(DC24V, DC48V), rated load and 25℃

External view

1.SMD(Type:B)

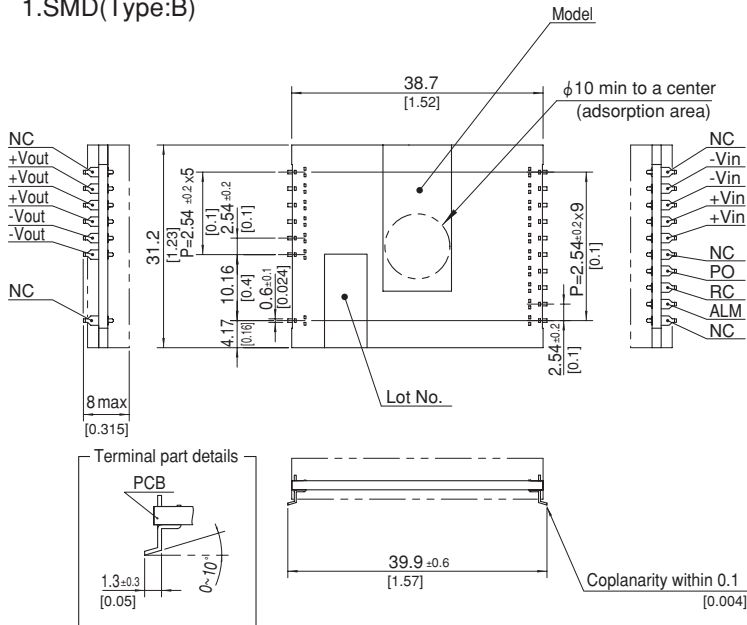


Recommended size for processing PCB (TOP VIEW)

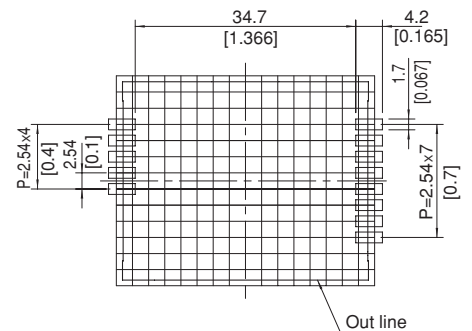


※Dimensions in: $\frac{\text{mm}}{[\text{inch}]}$

※Div.: 0.1inch

2.DIP(Type:C)

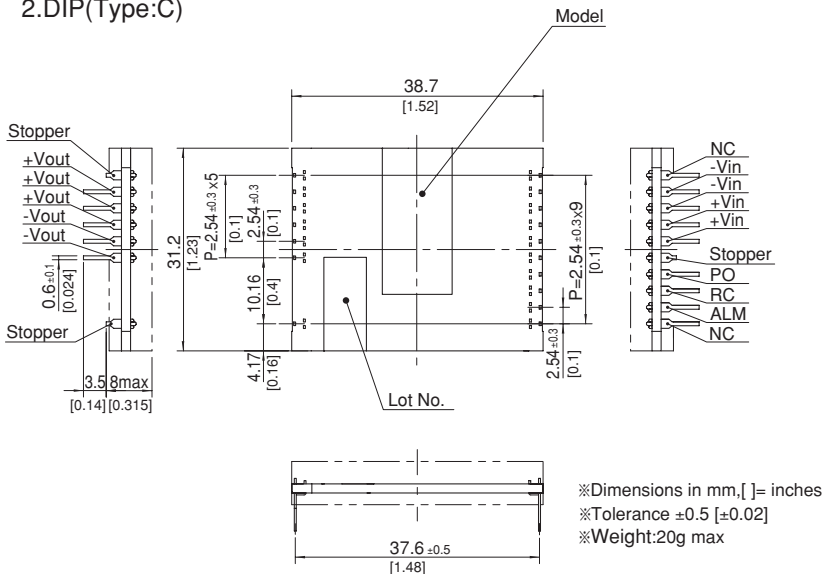

Recommended size for processing PCB (TOP VIEW)

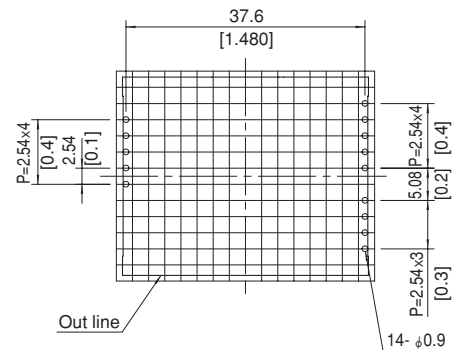

※Dimensions in: $\frac{\text{mm}}{[\text{inch}]}$

※Div.: 0.1inch

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

[SFS30241R2B](#) [SFS30241R5C](#) [SFS304802C](#) [SFS30241R5B](#) [SFS304802B](#) [SFS30241R8B](#) [SFS30241R8C](#)
[SFS30241R2C](#)