

SERIES 97

Half-Pitch

FEATURES

- Low Profile
- Half the Size of Standard DIP Switches
- 2, 4, 6, 8 & 10 Positions Available
- Less Mass for Easy Vacuum Pick & Place

APPLICATIONS

Used in any DIP application where space is at a premium such as notebook computers, hand-held radios, industrial control products, CD-ROM drives, cellular base stations and coin changers.

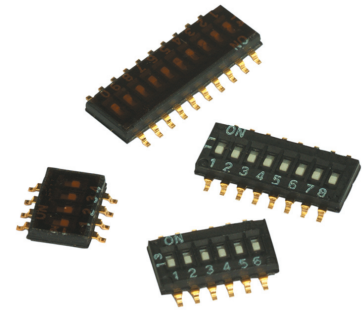


Fig. 1 Series 97C DIMENSIONS in inches (and millimeters)


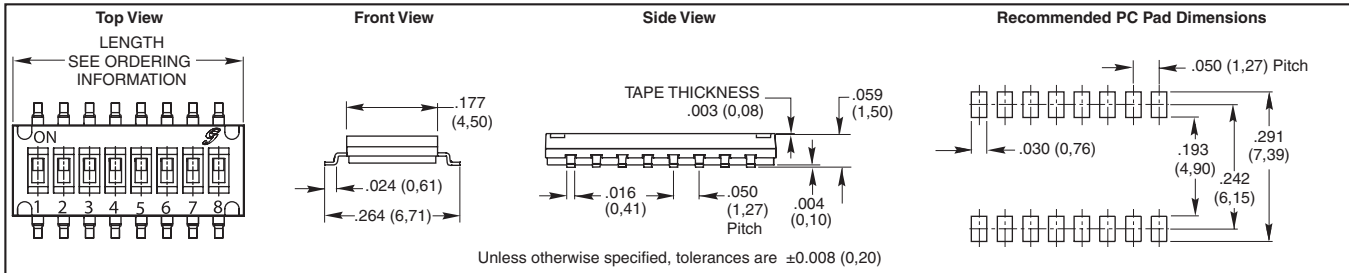


Fig. 2 Series 97R DIMENSIONS in inches (and millimeters)

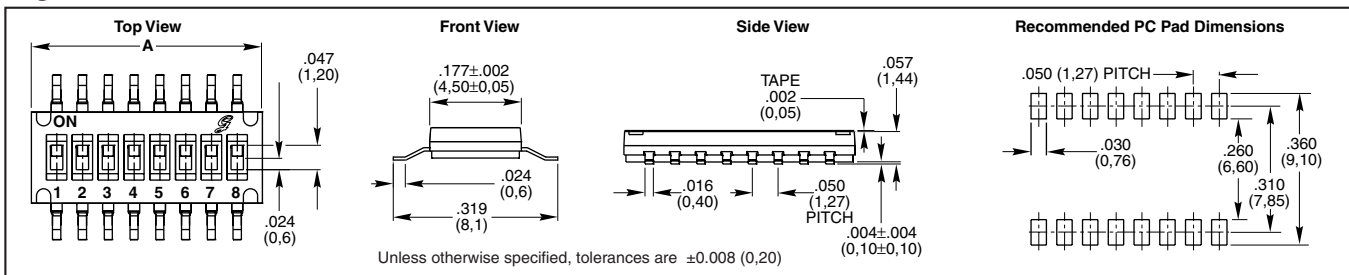

SPECIFICATIONS

Electrical Ratings

Contact Rating: 25 mA at 24 Vdc switching;
100 mA at 50 Vdc non-switching
Contact Resistance: 100 m Ω max, initially
Insulation Resistance: 100 M Ω minimum at 100 Vdc
Dielectric Strength: 300 Vac for one minute
Switch Capacitance: 5pF maximum
Contact Arrangement: SPST

Mechanical Ratings

Life: 1,000 cycles minimum
Operation Force: 500 gF
Mechanical Shock: MIL-STD-202F, Method, 213B, Test Condition A. Gravity: 50G's (peak value), 11 m/sec. Direction and times: 6 sides and 3 times in each direction.
Vibration: MIL-STD-202F, Method 201A. Passed 6 hours (2 hours in each) of three perpendicular planes at a cycle of 10-55-10Hz/1 minute.

Operating Temperature Range: -40 to 85°C

Storage Temperature Range: -40 to 85°C

Materials


Base and Cover: UL94V-0 Nylon, black
Actuators: UL94V-0 Nylon thermoplastic, white
Base Contacts: Alloy copper with gold-plating over nickel
Terminals: Brass with gold-plating
Tape Seal: Kapton

Soldering Information

Vapor phase and IR-reflow soldering can be applied. With stands 255°C peak temperature.

Cleaning: Tape sealed versions are capable of withstanding washing processes using alcohol-based solvents only. Water or other water-based solvent washing processes are not recommended. Care should be taken to avoid flux adhering to the switch body from the circuit

CIRCUITRY

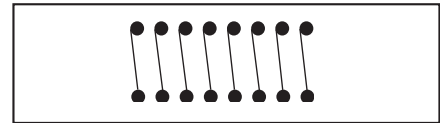

board soldering process. The switch should be allowed to cool for at least 3 minutes between the end of the solder process and the beginning of the wash process. The solvent stage of the cleaning process is not to exceed 1 minute and the whole wash process is not to exceed 3 minutes. Ultrasonic or pressure wash cleaning is not recommended.

Actuation: Switch slides should be actuated from a low angle in the intended direction of travel. The application of excess force from a high angle can cause permanent damage to the contact system. Tape seals must be removed to properly actuate the switches.

Packaging Information

Tube: 125 pcs/tube (2 positions), 75 pcs/tube (4 positions), 54 pcs/tube (6 positions), 40 pcs/tube (8 positions), 33 pcs/tube (10 positions).
Tape and Reel: 97C: 4,000 pcs/reel (all positions). 97R: 2500 pcs/reel (all positions).

DIP switches are shipped in the "ON" position.

ORDERING INFORMATION

	Series: 97C see fig. 1, 97R see fig. 2
	Positions: 02 = .148 (3,76), 04 = .248 (6,30), 06 = .348 (8,84), 08 = .448 (11,38), 10 = .548 (13,92)
	T= RoHS compliant
	Packaging: Blank = Tube, R = Tape and Reel (see pkg note)
	Seal: Blank = Unsealed, S = Top Tape Seal

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Grayhill:

[97C02ST](#) [97C02T](#) [97C04ST](#) [97C06ST](#) [97C08ST](#) [97C10ST](#) [97R02ST](#) [97R04ST](#) [97R08ST](#) [97C10RT](#) [97R04RT](#)
[97R10T](#) [97C10T](#) [97C06SRT](#) [97R10SRT](#) [97R02RT](#) [97R04T](#) [97R10ST](#) [97R02SRT](#) [97R04SRT](#) [97R08T](#)
[97R08SRT](#) [97R10RT](#) [97C08RT](#) [97C04RT](#) [97C04SRT](#) [97R06RT](#) [97C10SRT](#) [97C08SRT](#) [97C08T](#) [97C04T](#)
[97R06T](#) [97C02RT](#) [97C02SRT](#) [97R06SRT](#) [97C06T](#) [97R08RT](#) [97R02T](#) [97C06RT](#)